* TM 55-1500-342-23

TECHNICAL MANUAL

ARMY AVIATION MAINTENANCE ENGINEERING MANUAL WEIGHT AND BALANCE

DISTRIBUTION STATEMENT A: **Approved for public release; distribution is unlimited.**

*** This publication supersedes TM 55-405-9, 25 August 1966, including all changes.**

HEADQUARTERS, DEPARTMENT OF THE ARMY

29 AUGUST 1986

CHANGE

NO. 12

HEADQUARTERS
DEPARTMENT OF ARMY
WASHINGTON, D.C., 1 April 2010

ARMY AVIATION MAINTENANCE ENGINEERING MANUAL WEIGHT AND BALANCE

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove Pages	Insert Pages
A/(B Blank)	A and B
i and ii	i and ii
1-1/(1-2 Blank)	1-1/(1-2 Blank)
2-1 through 2-6	2-1 through 2-6
3-1 through 3-9/(3-10 Blank)	3-1 through 3-9/(3-10 Blank)
4-1 through 4-8.2	4-1 through 4-8.2
4-9 through 4-10.1/(4-10.2 Blank)	4-9 through 4-10.1/(4-10.2 Blank)
4-13 and 4-14	4-13 and 4-14
- - - - -	4-14.1/(4-14.2 Blank)
4-15 through 4-18	4-15 through 4-18
- - - - -	4-18.1/(4-18.2 Blank)
4-19 through 4-22.2	4-19 through 4-22.2
A-1/(A-2 Blank)	A-1/(A-2 Blank)
- - - - -	B-1 through B-15/(B-16 blank)
Glossary 1 through Glossary 6	Glossary-1 through Glossary-8

2. Retain this sheet in the front of manual for reference purposes.

TM 55-1500-342-23
C11

CHANGE
NO. 11

HEADQUARTERS
DEPARTMENT OF ARMY
WASHINGTON, D.C., 31 October 2008

ARMY AVIATION MAINTENANCE ENGINEERING MANUAL WEIGHT AND BALANCE

DISTRIIBUTION STATEMENT A: Approved for public release; distribution is unlimited

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove Pages	Insert Pages
A and B	A and B
2-1 and 2-2	2-1 and 2-2
2-5 and 2-6	2-5 and 2-6
4-1 and 4-2	4-1 and 4-2
4-3 and 4-4	4-3 and 4-4

2. Retain this sheet in front of manual for references purposes.

By Order of the Secretary of the Army:

GEORGE W. CASEY, JR.
General, United States Army
Chief of Staff

Official:

JOYCE E. MORROW
Administrative Assistant to the
Secretary of the Army
0831203

Distribution:

To be distributed in accordance with the initial distribution number (IDN) 311335 requirements for TM 55-1500-342-23.

CHANGE
NO. 10

HEADQUARTERS
DEPARTMENT OF ARMY
WASHINGTON, D.C., 24 May 2007

ARMY AVIATION MAINTENANCE ENGINEERING MANUAL WEIGHT AND BALANCE

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove Pages	Insert Pages
A/(B Blank)	A and B
i and ii	i and ii
1-1/(1-2 Blank)	1-1/(1-2 Blank)
2-1 through 2-6	2-1 through 2-6
3-1 through 3-6	3-1 through 3-9/(3-10 Blank)
4-1 through 4-8	4-1 through 4-8
- - - - -	4-8.1/(4-8.2 Blank)
4-9 and 4-10	4-9 and 4-10
4-10.1/(4-10.2 Blank)	4-10.1/(4-10.2 Blank)
4-11 through 4-22	4-11 through 4-22
- - - - -	4-22.1 and 4-22.2
- - - - -	A-1/(A-2 Blank)
- - - - -	Glossary-1 through Glossary-6
Cover	Cover

2. Retain this sheet in the front of manual for reference purposes.

TM 55-1500-342-23
C10

By Order of the Secretary of the Army

Official:

GEORGE W. CASEY, JR.
General, United States Army
Chief of Staff

JOYCE E. MORROW
Administrative Assistant to the
Secretary of the Army
0710301

DISTRIBUTION:
To be distributed in accordance with Initial Distribution number 311335 (IDN) requirements for TM 55-1500-342-23.

CHANGE

NO. 9

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 25 March 2004

Army Aviation Maintenance Engineering Manual

WEIGHT AND BALANCE

ENVIRONMENTAL/HAZARDOUS MATERIAL INFORMATION

This document has been reviewed for the presence of Class 1 Ozone Depleting Chemicals. As of change 8, dated 17 September 1996, all references to Class 1 Ozone Depleting Chemicals have been removed from this document by substitution with chemicals that do not cause atmospheric ozone depletion.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.


Remove pages	Insert pages
---	A/(B blank)
i and ii	i and ii
3-1 and 3-2	3-1 and 3-2
4-1 and 4-2	4-1 and 4-2
4-5 through 4-10	4-5 through 4-10
4-11 through 4-20	4-11 through 4-20

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

PETER J. SCHOOMAKER
General, United States Army
Chief of Staff

Official:



JOEL B. HUDSON
Administrative Assistant to the Secretary of the Army
0402701

DISTRIBUTION:

To be distributed in accordance with Initial Distribution Number (IDN) 311335, requirements for, TM 55-1500-342-23.

CHANGE

NO. 8

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 17 September 1996

**Army Aviation Maintenance
Engineering Manual**

WEIGHT AND BALANCE

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

TM 55-1500-342-23, 29 August 1986, is changed as follows:


1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
i and ii	i and ii
4-9 and 4-10	4-9 and 4-10
4-10.1/(4-10.2 blank)	4-10.1/(4-10.2 blank)

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

Official



JOEL B. HUDSON
Administrative Assistant to the
Secretary of the Army
02420

DENNIS J. REIMER
General, United States Army
Chief of Staff

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31-E, block no. 1335, requirements for TM 55-1500-342-23.

CHANGE

NO. 7

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 4 APRIL 1994

Army Aviation Maintenance
Engineering Manual

WEIGHT AND BALANCE

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
4-9 and 4-10	4-9 and 4-10
4-10.1/(4-10.2 blank)	4-10.1/(4-10.2 blank)
4-15 through 4-18	4-15 through 4-18

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

GORDON R. SULLIVAN
General, United States Army
Chief of Staff

Official:

MILTON H. HAMILTON
Administrative Assistant to the
Secretary of the Army
06559

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31-E, block no. 1335, requirements for TM 55-1500-342-23.

CHANGE

NO. 6

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 28 May 1993

**Army Aviation Maintenance
Engineering Manual**

WEIGHT AND BALANCE

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
i and ii	i and ii
4-1 through 4-6	4-1 through 4-6
4-10.1/(4-10.2 blank)	4-10.1/(4-10.2 blank)

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

GORDON R. SULLIVAN
General, United States Army
Chief of Staff

Official:

MILTON H. HAMILTON
Administrative Assistant to the
Secretary of the Army
04206

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31-E, block no. 1335, requirements for TM 55-1500342-23.

CHANGE
NO. 5

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 31 July 1992

**Army Aviation Maintenance
Engineering Manual**

WEIGHT AND BALANCE

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
1-1/1-2	1-1/1-2
2-1 and 2-2	2-1 and 2-2
3-1 and 3-2	3-1 and 3-2
4-1 and 4-2	4-1 and 4-2
4-13 and 4-14	4-13 and 4-14
2028's and Envelopes	2028's and Envelopes

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

GORDON R. SULLIVAN
General, United States Army
Chief of Staff

Official:

MILTON H. HAMILTON
Administrative Assistant to the
Secretary of the Army
02398

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31-E, block no. 1335, AVUM and AVIM maintenance requirements for TM 55-1500-342-23.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

CHANGE
NO. 4

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 2 October 1990

Army Aviation Maintenance Engineering Manual

WEIGHT AND BALANCE

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
i and ii	i and ii
4-9 and 4-10	4-9 and 4-10
- - - -	4-10.1/4-10.2

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

THOMAS F. SIKORA
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31, AVUM and AVDM Maintenance requirements for all Fixed and Rotary Wing Aircraft.

CHANGE
NO. 3

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 13 November 1989

**Army Aviation Maintenance
Engineering Manual**

WEIGHT AND BALANCE

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
4-3 through 4-8	4-3 through 4-8
4-17 through 4-20	4-17 through 4-20

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

WILLIAM J. MEEHAN II
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31, AVIM AND AVUM Maintenance requirements for all Fixed and Rotary Wing Aircraft.

This is a **reprint** of change 2.

CHANGE NO. 2

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 11 October 1988

Army Aviation Maintenance Engineering Manual

WEIGHT AND BALANCE

TM 55-1500-342-23, 29 August 1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
i and ii	i and ii
4-3 through 4-18	4-3 through 4-18
4-23 and 4-24	4-23 and 4-24

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

WILLIAM J. MEEHAN II
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31, AVIM and AVUM Maintenance requirements for all Fixed and Rotary Wing Aircraft.

CHANGE
NO. 1

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 16 September 1987

Army Aviation Maintenance
Engineering Manual

WEIGHT AND BALANCE

TM 55-1500-342-23, 29 August.1986, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
3-3 through 3-6	3-3 through 3-6
4-1 through 4-4	4-1 through 4-4
4-7 and 4-8	4-7 and 4-8
4-9 through 4-12	4-9 through 4-12
4-17 through 4-20	4-17 through 4-20

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31, AVIM and AVUM Maintenance requirements for All Fixed and Rotary Wing Aircraft.

LIST OF EFFECTIVE PAGES

Dates of issue for original and changed pages are:

Original . . . . . 29 August 1986
Change 1 . . . . . 16 September 1987
Change 2 . . . . . 11 October 1988
Change 3 . . . . . 13 November 1989
Change 4 . . . . . 2 October 1990
Change 5 . . . . . 31 July 1992
Change 6 . . . . . 28 May 1993
Change 7 . . . . . 4 April 1994
Change 8 . . . . . 17 September 1996
Change 9 . . . . . 25 March 2004
Change 10 . . . . . 24 May 2007
Change 11 . . . . . 31 October 2008
Change 12 . . . . . 1 April 2010

TOTAL NUMBER OF PAGES IN THIS PUBLICATION IS 140, CONSISTING OF THE FOLLOWING:

Page No.	*Change No.
Cover	0
A	12
B	12
i	12
ii	12
1-1	12
1-2 Blank	5
2-1	12
2-2	10
2-3	0
2-4	12
2-5	10
2-6	12
3-1	12
3-2	0
3-3	12
3-4	12
3-5	12
3-6	12
3-7	12
3-8	12
3-9	12
3-10 Blank	0
4-1	12
4-2	12
4-3	12
4-4	0
4-5	12
4-6	12
4-7	10
4-8	12
4-8.1	12
4-8.2	12
4-9	12
4-10	12
4-10.1	12
4-10.2 Blank	10
4-11	10
4-12	10
4-13	12
4-14	12
4-14.1	12
4-14.2 Blank	12
4-15	12
4-16	12
4-17	10
4-18	12
4-18.1	12
4-18.2 Blank	12
4-19	12
4-20	10
4-21	12
4-22	12
4-22.1	12
4-22.2	10
4-23	0
4-24	10
4-25	0
4-26	0
4-27	0
4-28	0
4-29	0
4-30	0
4-31	0
4-32	0
4-33	0
4-34	0
4-35	0
4-36	0
4-37	0
4-38	0
4-39	0
4-40	0
4-41	0
4-42	0
4-43	0
4-44	0
4-45	0
4-46	0
4-47	0
4-48	0
4-49	0

***Zero in this column indicates an original page.**

LIST OF EFFECTIVE PAGES (Cont)

Page No.	*Change No.	Page No.	*Change No.
4-50	0	B-10	12
4-51	0	B-11	12
4-52	0	B-12	12
4-53	0	B-13	12
4-54	0	B-14	12
A-1	12	B-15	12
A-2 Blank	10	B-16 Blank	12
B-1	12	Glossary-1	12
B-2	12	Glossary-2	12
B-3	12	Glossary-3	12
B-4	12	Glossary-4	12
B-5	12	Glossary-5	12
B-6	12	Glossary-6	12
B-7	12	Glossary-7	12
B-8	12	Glossary-8	12
B-9	12		

***Zero in this column indicates an original page.**

TECHNICAL MANUAL

No. 55-1500-342-23

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 29 August 1986

ARMY AVIATION MAINTENANCE ENGINEERING MANUAL WEIGHT AND BALANCE

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can improve this manual. If you find mistakes or if you know of a way to improve procedures, please let us know. Mail you letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) located at the back of this manual, directly to: Commander, U.S. Army Aviation and Missile Command, ATTN: AMSAM-MMA-NP, Redstone Arsenal, AL 35898-5000. A reply will be furnished to you. You may also provide DA Form 2028 information to AMCOM via e-mail, fax or the World Wide Web. Our fax number is: DSN 788-6546 or Commercial (256) 842-6546. Our e-mail address is 2028@redstone.army.mil. Instructions for sending an electronic 2028 may be found at the back of this bulletin immediately preceding the hard copy 2028. For the World Wide Web use: https://amcom2028.redstone.army.mil.

ENVIRONMENTAL/HAZARDOUS MATERIAL INFORMATION

This document has been reviewed for the presence of Class I Ozone Depleting Chemicals. As of change 08, dated 17 September 1996, all references to Class I Ozone Depleting Chemicals have been removed from this document by substitution with chemicals that do not cause atmospheric ozone depletion.

TABLE OF CONTENTS

		Page
CHAPTER 1	INTRODUCTION	1-1
CHAPTER 2	PRINCIPLES OF WEIGHT AND BALANCE	2-1
Section I	WEIGHT	2-1
Section II	BALANCE	2-2
CHAPTER 3	WEIGHING AIRCRAFT	3-1
Section I	WEIGHING EQUIPMENT	3-1
Section II	WEIGHING PRACTICES AND PROCEDURES	3-5
CHAPTER 4	WEIGHT AND BALANCE RECORDS	4-1
Section I	TYPES OF FORMS	4-1
Section II	INSTRUCTIONS FOR USE OF DD FORM 365 SERIES AND CHART E	4-3
APPENDIX A	REFERENCES	A-1
APPENDIX B	Example Charts and Forms	B-1
GLOSSARY		Glossary-1

LIST OF ILLUSTRATIONS

Figure	Title	Page
2-1	Asymmetric Configurations	2-2
2-2	Aircraft Balance Point	2-3
2-3	Locating Aircraft Center of Gravity	2-4
2-4	Weight Terminology	2-6
3-1	Electronic Weighing Kit (Typical)	3-2
3-2	Typical Platform Scale Assembly	3-3
3-3	Accessory Weighing Kit	3-4
3-4	Lowest Point of Meniscus	3-6
4-1	DD Form 365	4-4
4-2	DD Form 365-1	4-7

* This publication supersedes TM 55-405-9, 25 August 1966, including all changes.

LIST OF ILLUSTRATIONS (Cont)

Figure	Title	Page
4-3	DD Form 365-2	4-8.2
4-4	DD Form 365-3 (Front) (Sheet 1 of 2)	4-11
4-5	Load Adjuster	4-14
4-6	DD Form 365-4 (Front)	4-17
4-7	Load Adjuster	4-18
4-8	DD Form 365-4 (Reverse)	4-20
4-9	Average Arm Example	4-21
4-10	Chart E	4-22.2
B-1	Example AWBS Record of Weight and Balance Personnel	B-2
B-2	Example AWBS Chart A	B-3
B-3	Example AWBS Form B	B-4
B-4	Example AWBS Chart C	B-6
B-5	Example AWBS Form F	B-7
B-6	Example AWBS Form F	B-9
B-7	Example AWBS Form B	B-11
B-8	Example AWBS Chart A	B-13
B-9	Example AWBS Chart C	B-15

CHAPTER 1
INTRODUCTION

1-1. PURPOSE. The purpose of this manual is to provide information necessary for the control of weight and balance of Army aircraft. Much of the information contained herein is general in nature since it is applicable to all aircraft. Refer to the appropriate -10 operator's and -23 maintenance manuals when specific weight and balance data is required for a particular aircraft.

1-2. SCOPE. Material presented in this manual applies to all activities that operate and/or maintain Department if the Army aircraft. Sufficient explanation of principles, definitions, and procedural data are given to provide weight & balance personnel with a general information manual pertinent to their particular function. Also included is a complete description of related equipment and instructions for its use and operation. The procedural data is an in-depth description of the system used to control and document weight and balance on the Army aircraft. This is accomplished through the proper use of the following documents:

- DD Form 365 (Record of Weight and Balance Personnel)
- DD Form 365-1 (Chart A – Basic Weight Checklist Record)
- DD Form 365-2 (Form B – Aircraft Weighing Record)
- DD Form 365-3 (Chart C – Basic Weight and Balance Record)
- DD Form 365-4 (Weight and Balance Clearance Form F)
- Chart E (Loading Data and Special Weighing Instructions)

While these documents all bear a concise title and a Department of Defense form number, Forms 365-1 through 365-4 have become known primarily by their abbreviated titles – – Chart A, Form B, Chart C, and Form F. Therefore, in this manual the abbreviated titles will be used. Proper use of these forms and charts is covered in detail in Chapter 4.

1-3. USE OF WORDS SHALL, SHOULD, AND MAY. Within this manual the word shall is used to indicate a mandatory requirement. The word should is used to indicate a non-mandatory but preferred method of accomplishment. The word may is used to indicate an acceptable method of accomplishment.

1-4. WARNINGS, CAUTIONS, AND NOTES DEFINED. Warnings, cautions, and notes are used to emphasize important, and critical instructions and are used for the following conditions:

WARNING

An operating procedure, practice, etc, which if not correctly followed, could result in personal injury or loss of life.

CAUTION

An operating procedure, practice, etc, which, if not strictly observed, could result in damage to or destruction of equipment.

NOTE

An operating procedure, condition, etc, which it is essential to highlight.

1-5. REASONS FOR WEIGHT AND BALANCE CONTROL. Flight characteristics of aircraft are directly dependent upon conditions of weight and balance. Gross weight and center of gravity (cg) have a bearing on performance, stability, and control of the aircraft. For example, cargo placed too far aft in an already critically loaded aircraft will move the center of gravity out of the permissible balance limits. This could easily cause the pilot to lose control of the aircraft. Hazardous flight conditions and accidents resulting from these conditions can be prevented by adherence to the principles of weight and balance set forth in the manual.

1-6. RESPONSIBILITIES. Basic weight and balance data is delivered with the aircraft. Once aircraft are delivered, however, it becomes the responsibility of maintenance and operating units to maintain accurate weight and balance data. Maintenance activities are required to weigh specific aircraft periodically in accordance with the provisions of AR 95-1 or 95-23 to insure that basic weight and balance data is correct. It is the pilot's or operator's responsibility to insure that the weight and balance conditions of the aircraft are within safe limits, in accordance with the provisions of AR 95–23.

NOTE

Scheduled inspections for aircraft inventories (Chart A), weighings (Form B), Form F reviews, and all other weight and balance records shall be methodically tracked to ensure inspections are performed. Proper use of DA Form 2408–18, the AWBS Scheduler, or other similar management tools are acceptable.

CHAPTER 2
PRINCIPLES OF WEIGHT AND BALANCE

SECTION I WEIGHT

2-1. GENERAL. Weight is one of the most important factors to be considered from the time the aircraft is designed until it is removed from service. It is of prime importance to the manufacturer through all phases of production and must remain foremost in the pilot's mind when planning and carrying out missions. Changes in the basic aircraft design weight, either in initial production by the manufacturer, or in subsequent modifications by maintenance activities, will have to direct bearing on aircraft performance. Cargo/troop loading and the aircraft gross weight should be examined closely by the pilot as these factors may determine the safety and success of a mission. Gross weight limitations have been established and are in the applicable -10 operator's manual for individual aircraft to insure successful and efficient tactical operation.

2-2. Deleted.

2-3. WEIGHT VERSUS AIRCRAFT PERFORMANCE. An aircraft is designed for specific weight limitations which cannot be exceeded without compromising safety. Overloading an aircraft may cause structural failure or result in reduced engine and airframe life. An increase in gross weight will have the following effects on aircraft performance:

a. Increase takeoff distance.

b. Reduce hover performance.

c. Reduce rate of climb.

d. Reduce cruising speed.

e. Increase stalling speed.

f. Reduce maneuverability.

g. Reduce ceiling.

h. Reduce Range.

i. Increase landing distances.

j. Instability.

2-4. FLOOR LOADING. Floor loading is the weight of a load in pounds divided by the area of floor space which the load occupies. For example is determined as follows:

Base of container = 20 in x 20 in = 400 sq in

$$\text{Floor Loading} = \frac{100 \text{ lb}}{400 \text{ sq in}} = 0.25 \text{ lb per sq in}$$

or 0.25lb' sq in x 144 = 36 lb/sq ft.

Floor loading limits or a plan view of the cargo floor showing variations in floor strength and weight concentration limitations for various compartments are specified in the applicable -10 operator's manual.

2-5. BALLAST. Ballast is some form of weight placed in a specific location in an aircraft to insure stability of flight by compensating for unfavorable weight and balance conditions. Two types of ballast are permanent ballast and temporary ballast.

a. Permanent Ballast. In certain instances modification work orders will call for the removal or addition of equipment which will have a marked effect on aircraft weight and balance conditions. When this is the case, it is necessary to install ballast weights to maintain the center of gravity position within the center of gravity limits. The agency responsible for preparing the modification work order will consider effects of the modification on weight and balance conditions and will specify requirements for installation of permanent ballast weights when required. Maintenance activities that install permanent ballast weights are responsible for making the proper entries on the Chart A and Chart C.

b. Temporary Ballast. Temporary ballast consist of such weights as may be necessary to compensate for missing crew members, weapons systems, ammunition and equipment in order to maintain center of gravity positions within the center of gravity limits. Shot bags or other similar items may be used for temporary ballast provided they are properly secured. The amount and location of temporary ballast required to maintain safe flight, will be determined by the pilot or weight and balance technician.

SECTION II BALANCE

2-6. GENERAL The purpose of this section is to outline the method for determining the cg position of a loaded aircraft. Although location of the cg is very important to safety of flight, it can be easily controlled by proper loading of the aircraft. Balance or the location of the aircraft's cg, is of primary importance to aircraft stability. A pilot should never fly an aircraft if he is not personally satisfied with its loading and balance condition. The cg is the point about which an aircraft would balance if it were possible to support the aircraft at that point. It is the mass center of the aircraft or the theoretical point at which the entire weight of an aircraft is assumed to be concentrated.

a. For most aircraft the prime concern is the Longitudinal balance, or the location of the cg along a designated reference line running from the nose to the tail. Location of the cg with reference to the Lateral (side to side) axis is also important for some aircraft. If an aircraft will be flown in an asymmetrical configuration, it is required to calculate the Lateral cg. The design of most aircraft is such that symmetry is assumed to exist about a vertical plane through the Longitudinal axis. In other words, for each item of weight existing to the left of the fuselage centerline there is generally an equal weight existing at a corresponding location on the right. This Lateral mass symmetry however may be easily upset due to unbalanced Lateral loading. Location of the Lateral cg is not only important from the aspect of loading rotary wing aircraft, but is also extremely important when considering fixed wing exterior drop loads. The position of the Lateral cg shall be computed when a Lateral imbalance is present or when flying in an asymmetric configuration (see figure 2-1).

b. The cg (henceforth, reference to cg will mean the longitudinal center of gravity) is not necessarily a fixed point; its location depends on the distribution of items loaded in the aircraft, and as variable load items are shifted or expended, there is a resultant shift in cg location. It should be realized that if mass center of an aircraft is displaced too far forward on the longitudinal axis a nose heavy condition will result. Conversely, if the mass center is displaced too far aft on the longitudinal axis, a tail heavy condition will result. It is possible that an unfavorable location of the cg could produce such an unstable condition that the pilot could lose control of the aircraft.

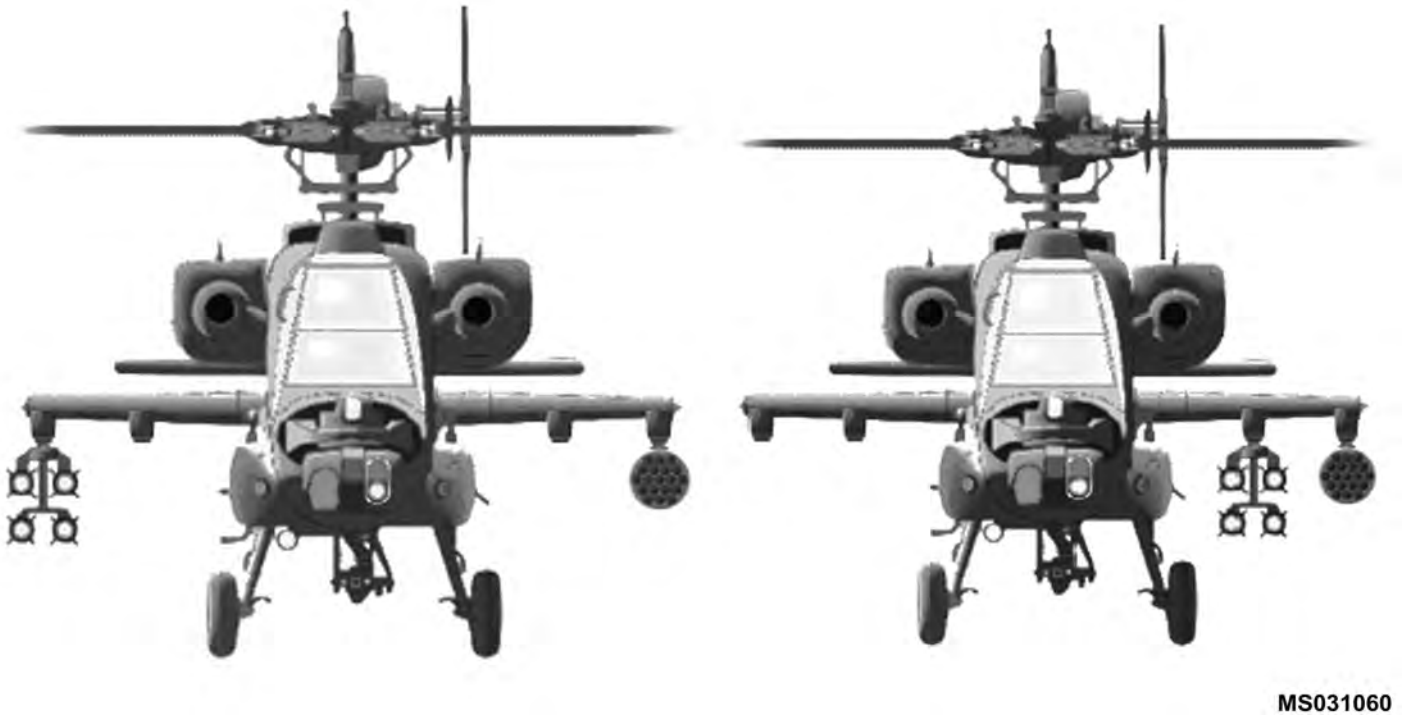


Figure 2-1. Asymmetric Configurations

2-7. PRINCIPLE OF MOMENTS. To understand balance, it is necessary to have a working knowledge of the principle of moments. For those unfamiliar with weight and balance terms, the word moment is the product of a force or weight, times a distance. The distance used in calculating a moment is referred to as the arm or moment arm, and is usually expressed in inches. To calculate a moment, a force (or weight) and a distance must be known. The distance is measured from some desired known point (reference point or reference datum) to the point through which the force acts. A moment is meaningless unless the reference point about which the moment was calculated is specified.

a. For the purpose of illustration, an aircraft may be compared to a seesaw. Like the seesaw, in order for an aircraft to be in balance, or equilibrium, the sum of the moments on each side of the balance point must be equal in magnitude.

For example, referring to figure 2-2, the moment produced about the fulcrum (reference point) by the 200 pound weight is 200 lb x 50 in = 10,000 in lb counterclockwise. The moment produced about the same reference point by the 100 pound weight is 100 lb x 100 =10,000 in lb clockwise. In this case, the clockwise moment counterbalances the counterclockwise moment, and the system is in equilibrium . This example illustrates the principle of moments which is as follows: For system to be in static equilibrium, the sum of the moments about any point must equal zero.

b. As illustrated in figure 2-2, the clockwise moment is arbitrarily given a positive (+) sign while the counterclockwise moment is given a negative (-) sign. Therefore, the sum of the moments about the fulcrum = +10,000 in lb (clockwise) -10,000 in lb (counterclockwise) -0, and the system is in equilibrium. In determining balance of an aircraft, the fulcrum is the unknown, and the problem is one of determining the location of the fulcrum, or longitudinal center of gravity.

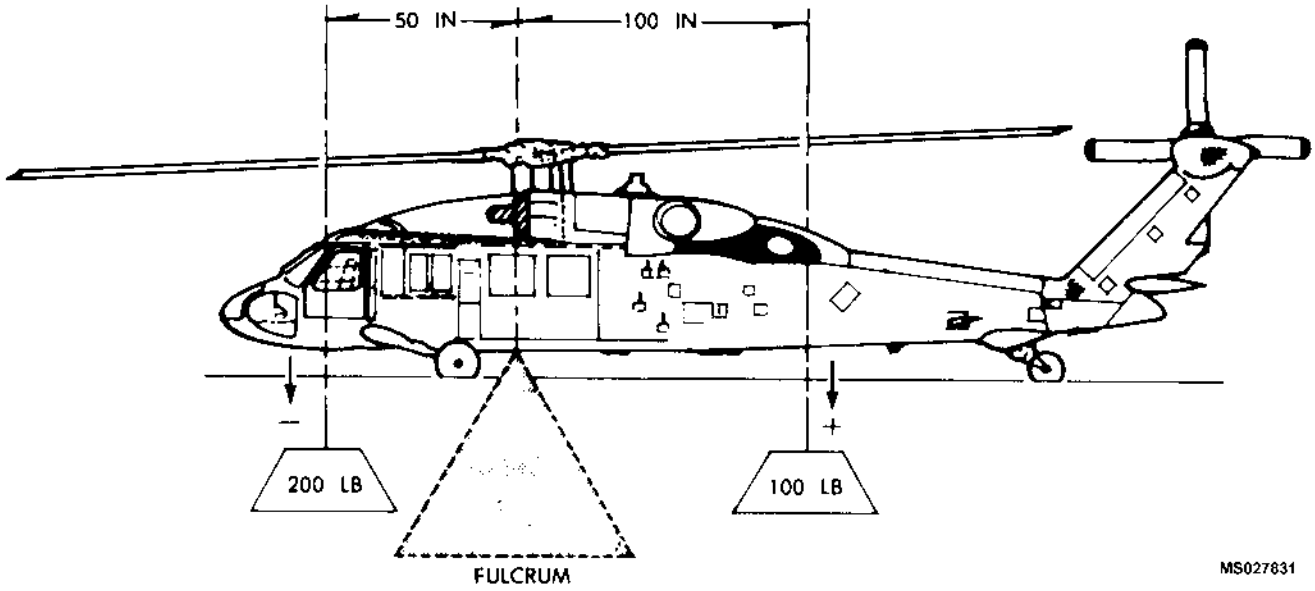


Figure 2-2. Aircraft Balance Point

2-8. Deleted.

2-9. EFFECTS OF MOMENT ON AIRCRAFT. As in the case of the seesaw, which can be balanced about its fulcrum, an aircraft may be considered to be in balance about its cg. Loads placed forward of the aircraft cg can be balanced by placing loads aft of the cg. Loads located forward of the cg of an aircraft produce moments which tend to make the nose go down, whereas loads located aft of the cg produce moments which tend to make the tail go down. If any item is added forward of the cg or removed aft of the cg, a nose-heavy condition will result. Conversely, any item added aft of the cg or removed forward of the cg will produce a tail-heavy condition. It should be realized that a moment can be changed without adding or removing a weight simply by shifting weight forward or aft.

2-10. DETERMINATION OF BALANCE CONDITION (LOCATION OF AIRCRAFT CENTER OF GRAVITY). To determine the cg location of loaded aircraft, it is first necessary to obtain the basic weight and moment of the aircraft from Chart C. Add the weight of the items to be loaded to the aircraft basic weight to obtain the gross weight. Compute the moment of each load item by multiplying its weight by its arm. Find the gross weight moment by adding the basic aircraft moment and the moments of the load items. Determine the cg location by dividing the gross weight moment by the gross weight. Figure 2-3 illustrates the method for determining the cg location of a loaded aircraft.

NOTE


In computations, any item of weight added to the aircraft either side of the datum is a plus weight. Any weight item removed is a minus weight. When multiplying weights by arms, the moment is plus if the signs are alike and minus if the signs are unlike. The following combinations are possible:

Items added forward of the datum - (+) weight X (-) arm = (-) moment.

Items added aft of the datum - (+) weight X (+) arm = (+) moment.

Items removed forward of the datum - (-) weight X (-) arm = (+) moment.

Items removed aft of the datum - (-) weight X (+) arm = (-) moment.

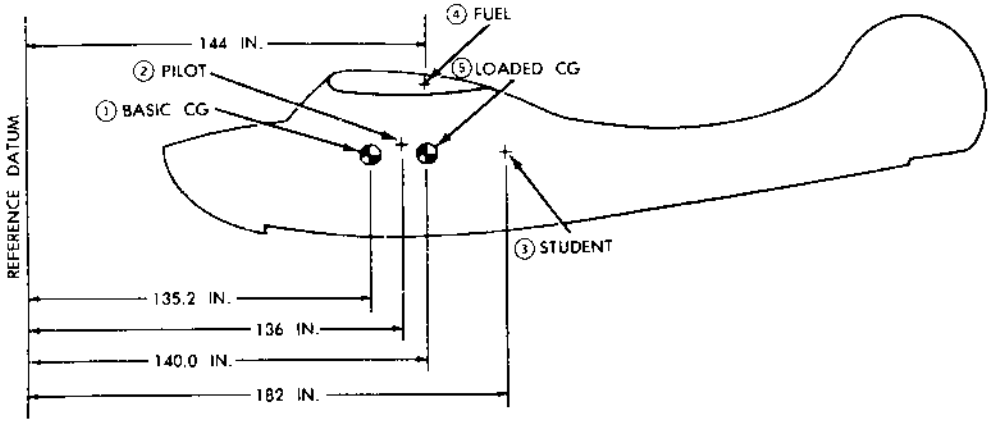

	WT	ARM	MOMENT
① BASIC AIRCRAFT	1707	135.2	230786
② PILOT	200	136.0	27200
③ STUDENT	200	182.0	36400
④ FUEL	252	144.0	36288
GROSS AIRCRAFT	2359		330674

$$⑤\ CG = \frac{330674}{2359} = 140.0\ IN.$$

MS027832

Figure 2-3. Locating Aircraft Center of Gravity

2-11. EFFECTS OF UNBALANCED LOADING. When the aircraft is nose heavy (cg too far forward), the pilot will experience difficulty in getting the tail down during landing. Other unfavorable conditions which may result are loss of aircraft maneuverability, overstress of the nose, wheel structure in landing, and increase of pilot fatigue. When a tail heavy condition exists (cg too far aft), the aircraft may become unstable. This condition increases pilot fatigue, and may lead to structural failure and spins.

2-12. DETERMINING CENTER OF GRAVITY FOR A GROUP OF ITEMS. It is sometimes desirable to find the average arm or cg for a group of objects in an aircraft. This is accomplished by finding the individual moment of each object in the group, adding these moments, and dividing this sum by the total weight of all the objects in the group. It is expressed by the formula:

$$\text{Average arm (in)} = \frac{\text{total moment (in lb)}}{\text{Total weight (lb)}}$$

It should be noted that basic aircraft weight and moment are excluded from this calculation.

2-13. CENTER OF GRAVITY LIMITS. All aircraft have allowable limits between which the cg must lie. After the cg position of a loaded aircraft has been calculated, it is necessary to ensure that the cg falls within these allowable limits. These limits are specified in the applicable -10 operators manual (alternate is Chart E data) covering the particular aircraft. If, after loading the aircraft, the cg does not fall within the allowable limits, it will be necessary to shift loads.

a. The forward cg limit may vary with the gross weight of an aircraft and is often restricted to control landing conditions. It may be possible for aircraft to maintain stable and safe flight with the cg ahead of the forward limit as prescribed by landing conditions, but since landing is one of the most critical phases of flight, the forward cg limit is restricted to avoid damage to the aircraft structure when landing, and to insure that sufficient elevator deflection is available at minimum airspeed. When structural limitations or large stick forces do not limit the forward cg position, this point is determined as that cg position at which full up elevator is required to obtain a high angle of attack for landing.

b. The aft cg limit is the most rearward position at which the cg can be located for the most critical maneuver or operation. As the cg moves aft, a less stable condition occurs which decreases the ability of the aircraft to right itself after maneuvering or after disturbances by gusts. The allowable aft cg limit may also vary with the aircraft gross weight.

2-14. EXPRESSING CENTER OF GRAVITY. The cg position is expressed in terms of inches from a known reference datum.

2-15. WEIGHT TERMINOLOGY. Figure 2-4 illustrates the meaning of Army aircraft weight terminology. For related definitions, see Appendix A and the applicable aircraft operator's manual or Chart E.

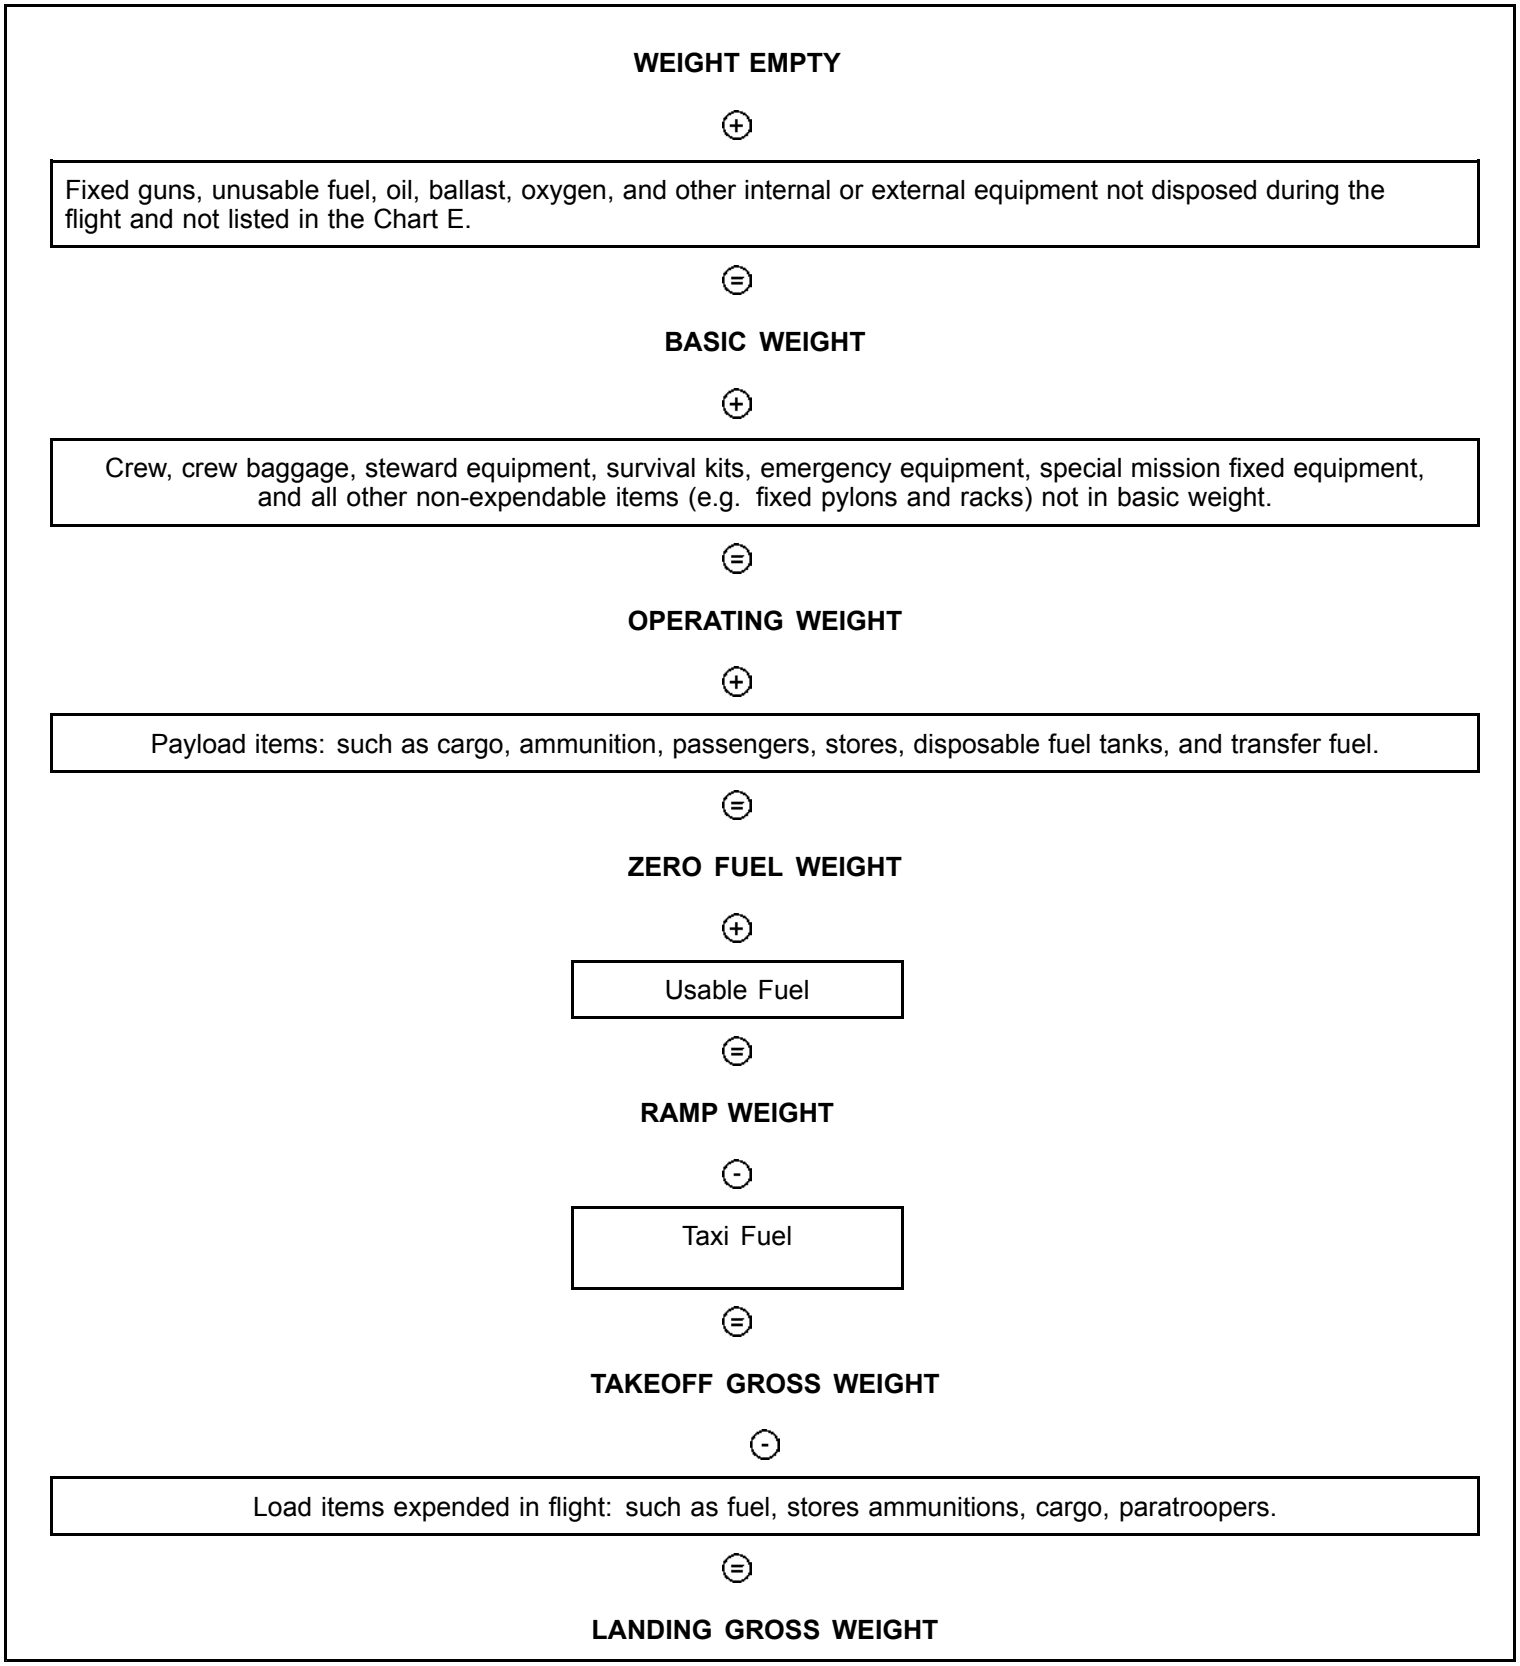


Figure 2-4. Weight Terminology

CHAPTER 3
WEIGHING AIRCRAFT

SECTION I WEIGHING EQUIPMENT

3-1. GENERAL. Weighing aircraft with accurately calibrated scales is the only sure method of obtaining an accurate basic weight and cg location. The use of Chart A and Chart C in accounting for correcting the aircraft basic weight and cg is reliable over certain periods of time. Over extended intervals, however, unknown service weight pickup and other factors will render the basic weight and cg data inaccurate. For this reason aircraft weighing's are required periodically as outlined in AR 95-1 and AR 95-23. Besides those times designated in the regulations, aircraft will be weighed when major modifications or repairs are made when the pilot reports unsatisfactory flight characteristics, such as nose or tail heaviness, and when basic weight data reflected by Chart C is suspected to be in error. In AR 95-1 and AR 95-23, aircraft are classified for the purpose of weight and balance control. Reference should be made to the regulations since weighing requirements vary for the different classes. An aircraft is weighed for the purpose of determining its basic weight and balance. This means that the aircraft should be weighed in its basic condition; that is, with fixed normal equipment which is actually present in the aircraft, less fuel and other expendable load items. This does not preclude weighing the aircraft with expendable load items, if specific weight of the items is available and proper computations are accomplished to determine basic weight. Supplied with the basic weight and balance data, the pilot is able to compute the gross weight and balance of his mission-ready aircraft to insure safety of flight and mission accomplishment.

3-2. COMBAT AIRCRAFT WEIGHT AND BALANCE MANAGEMENT

a. Special circumstances exist in deployed locations which prevent ideal conditions for weighing. For those aircraft deployed within the theater of operations, weighing of aircraft is permitted in an open hanger if the following conditions are met:

(1) There is no risk of aircraft falling off jacks (if used) due to air movement.

(2) Scale readings do not change for a minimum of 30 seconds prior to recording the weight.

b. A 90-day combat weighing deferment can be granted to allow more time to coordinate issues with weighing aircraft provided the following requirements are met:

(1) An official memorandum from the unit commander stating the reason for the request, the unit designation and location, the aircraft serial number and airframe type.

(2) All of the weight and balance records to include Chart A, Chart B, and Chart C have been provided.

(3) Commander's request with copy of aircraft's weight and balance file must be sent to the appropriate contacts listed below, using the following address block or the appropriate e-mail address:

CDR, USARDECOM
ATTN: (POC's Office Symbol, Contact Name
See (1) - (5) below)
Building 4488
Redstone Arsenal, AL 35898-5000

(a) AH-64: AMSRD-AMR-AE-D, E-mail: AE-D-TTS@amrdec.army.mil, CC: Aeromechanics@amrdec.army.mil


(b) UH-60: AMSRD-AMR-AE-U, E-mail: AE-U-TTS@amrdec.army.mil, CC: Aeromechanics@amrdec.army.mil

(c)) CH-47: AMSRD-AMR-AE-C, E-mail: AE-C-TTS@amrdec.army.mil, CC: Aeromechanics@amrdec.army.mil

(d) OH-58/Fixed Wing: AMSRD-AMR-AE-B, E-mail: AE-B-TTS@amrdec.army.mil, CC: Aeromechanics@amrdec.army.mil

(e) Special Operations Aircraft: AMSRD-AMR-T, E-mail: AE-T-TTS@amrdec.army.mil, CC: Aeromechanics@amrdec.army.mil

3-3. WEIGHING EQUIPMENT. Two types of scales are generally used for weighing Army aircraft, portable load cells (see Electronic Weighing Kit Figure 3-1) that are used with jacks and platform aircraft scales (see Figure 3-2). Stationary pit type scales or other devices may be used as authorized for particular aircraft models or activities. To ensure accurate results in determining aircraft weight, the instructions provided in the technical manuals for the specified weighing system must be followed.

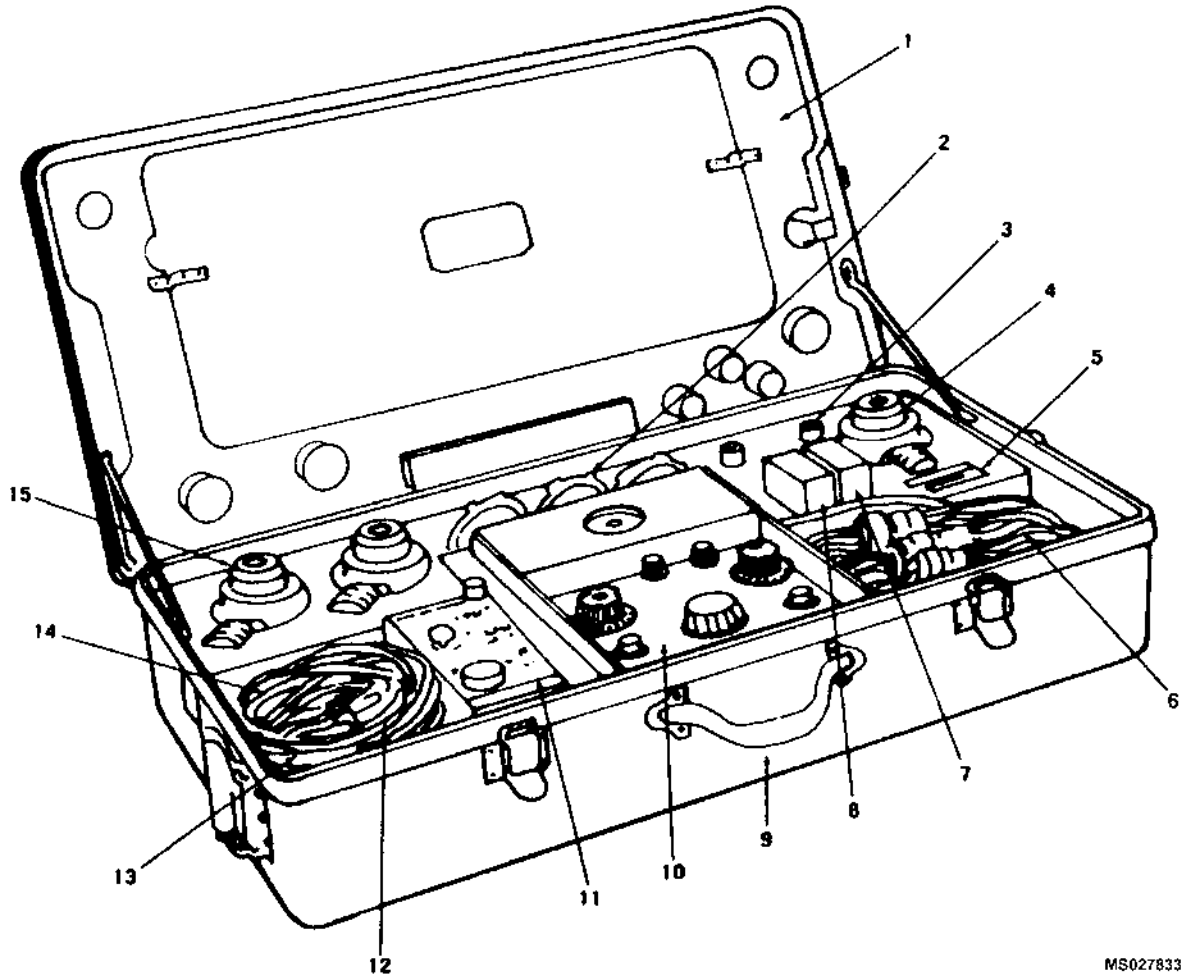

1. ACCESSORY KIT ASSEMBLY
2. RING ADAPTER ASSEMBLY
3. PLUG ADAPTER
4. SPHERICAL ADAPTER
5. ALLEN WRENCH
6. REEL ASSEMBLY
7. SPARE TUBE KIT
8. SPARE TUBE KIT
9. CASE ASSEMBLY
10. INDICATOR ASSEMBLY
11. POWER SUPPLY ASSEMBLY
12. EXTENSION CABLE ASSEMBLY
13. CABLE ASSEMBLY
14. BATTERY CABLE ASSEMBLY
15. CELL ASSEMBLY

Figure 3-1. Electronic Weighing Kit (Typical)

NOTE

Aircraft weighing equipment shall only be used to weigh aircraft.

a. Electronic Weighing Kit. An electronic weighing kit containing load cells which are attached to axle or wing jacks for weighing aircraft. A typical kit contains three or four load cells, power cords, ring adapters, and weighing accessory kit. Jack pad adapters (typically part of aircraft jacks) should be used (if required) to fit the load cell to the aircraft's jack pad.

(1) Ring type load cell adapters are usually used with jacks. These load cell adapters must be securely attached to jacks when employed. The load cell must be placed squarely and symmetrically on top of the jack head.

(2) Some weighing kits also come with two jack pad adapters, the use of which depends upon the shape of the aircraft's jack pad.

b. Platform Aircraft Scales. A typical system contains three or four platform scales, each with individual ramps and extension platforms, (see Figure 3-2), power cords, and weighing accessory kit. The complete system is portable with storage cases adaptable for a cart mounted on casters. The aircraft is towed onto the platform scales and the resulting weight forces are measured. An advantage of this system is that the aircraft does not have to be jacked, thus minimizing side loads. Complete operating and weighing instructions are contained in the applicable aircraft's maintenance manuals.

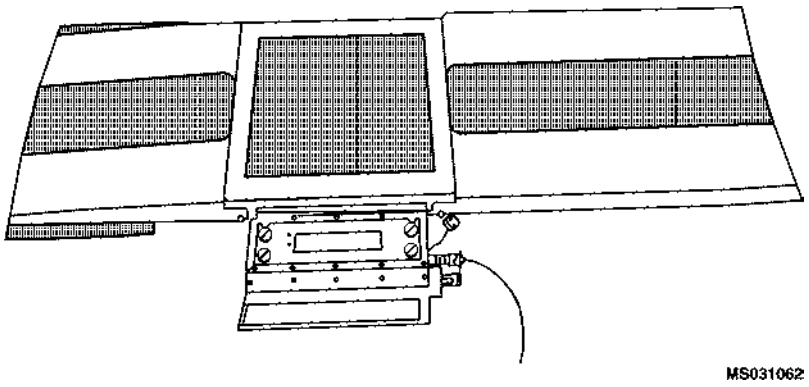


Figure 3-2. Typical Platform Scale Assembly

3-4. CALIBRATION OF WEIGHING EQUIPMENT. Commanders of Army organizations which operate, maintain, or modify aircraft are responsible for ensuring that weighing equipment under their jurisdiction are calibrated periodically and certified by a government inspector of weights and measures or by commercial scale officials in accordance with TB 750-25 and TB 43-180. Unless directed in the above TB's, scales shall be calibrated or certified correct at least once every 12 months. Aircraft manufacturers or maintenance activities are authorized to use equipment that has been calibrated by standards that are traceable to the National Institute of Standards and Technology (NIST).

3-5. ASSOCIATED TERMS, FIXTURES, AND ACCESSORIES. To measure such data as lengths, angles, and densities, weight and balance personnel require accessories such as levels, plumb bobs, measuring tapes, chalk lines, and hydrometers. This equipment normally is included in electronic weighing kits. It may often be necessary to prepare special devices that will facilitate taking measurements and leveling specific types of aircraft. Special equipment, when required, will be called out in the aircraft's maintenance manuals. The description and definition of several of the more important terms and fixtures are provided as follows:

a. Accessory Weighing Kit. A kit containing compartments for each accessory weighing item should be provided for storing and carrying the weighing accessories. (See Figure 3-3). This is a necessary precaution against loss. Some electric weighing kits have the accessories incorporated in the kit for convenience.

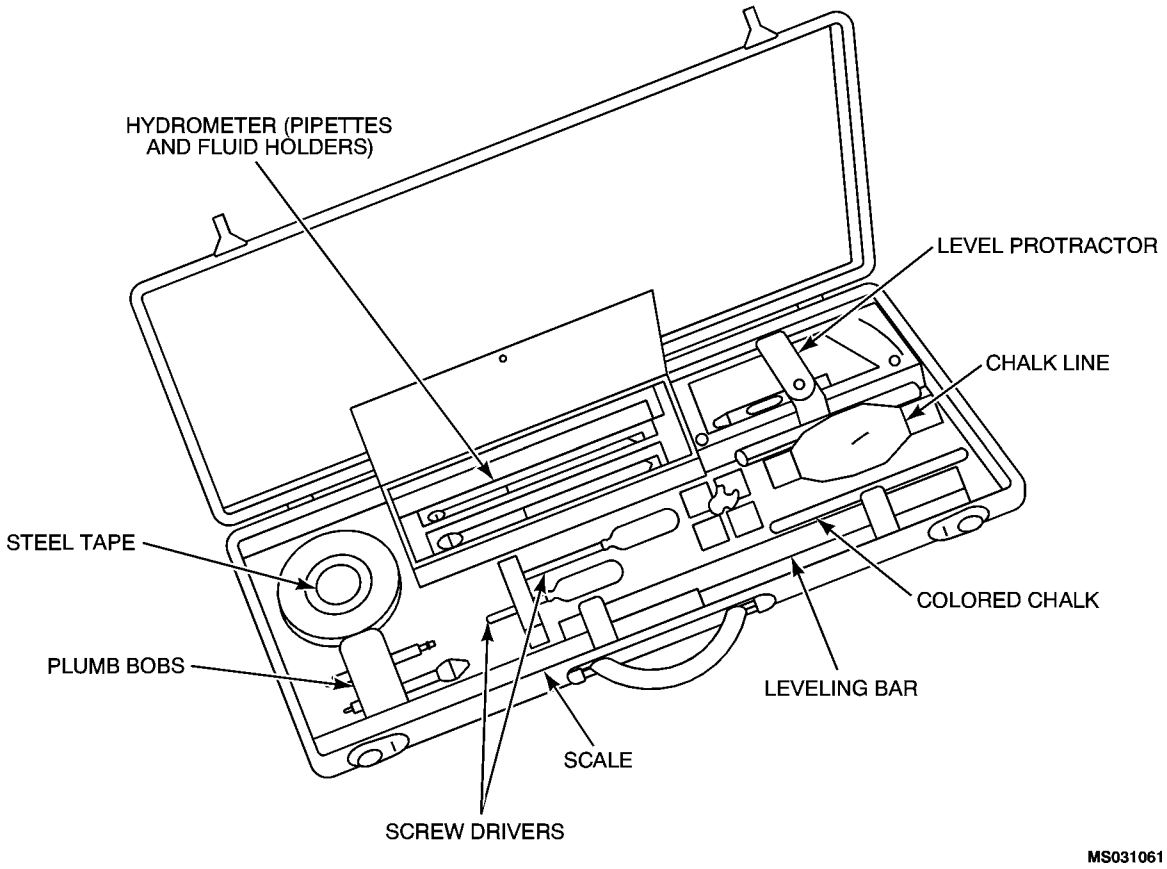


Figure 3-3. Accessory Weighing Kit

b. Platform Aircraft Scales An approved type of jack is required to raise the aircraft to a level position clear of the hangar floor. A high quality standard jack, with suitable capacity and extension range, should be used. The jack must have an ample flat base area and have a suitable head, or adapter, to retain the load cells and thus prevent slippage and resulting damage to the aircraft. The capacity of the jack points should also be checked to ensure the points would not be overloaded while weighing the aircraft.

c. Chalk Line. This is a string, covered with chalk, which is used to mark a straight chalked line on the hangar floor between the vertical projections of the main reaction points or jig locations. The string should be sturdy and hard finished. The electronic weighing kit usually includes a chalk line reel.

d. Hydrometer. A hydrometer with a calibration range from 5.5 to 7.0 pounds per US gallon should be used for determining the density of fuel when required. A transparent container for holding fuel samples and a pipette at least 12 inches long or some other similar device for withdrawing samples from the tank is necessary for use with the hydrometer. This equipment is incorporated within the weighing kit. Care must be taken not to damage the glassware.

e. Jack pad adapters are spherical-type adapters used to mate the conical protrusion (jack pads) and load cell assembly

f. Jack pads are fittings attached to the aircraft structure which are used for reaction or jack points. A rounded or conical extension protrudes from the base of the jack pad and serves as the point of contact for the weighing cell assembly or jack.

g. Jig-located brackets and plates are used with a plumb bob for leveling certain aircraft.

h. Jig points are established during construction of an aircraft and are used as a reference for taking measurements during weighing. The jig point may be a hole, fitting, or any other conveniently fixed station on the aircraft. Jig point locations are specified in the appropriate maintenance manual (Chart E data).

i. Leveling Bars. One set of leveling bars normally comes with the electronic weighing kit. This two-

part bar can be used in conjunction with the spirit level for floor and aircraft angle measuring.

j. Leveling lugs are located on some aircraft to facilitate use of the spirit level in leveling aircraft.

k. Plumb Bobs. Plumb bobs are used to project points on the aircraft onto the floor for measuring dimensions in a level plane and for leveling most aircraft. Each plumb bob should have a slot in the head so that excess string, which could interfere with the free swing of the plumb bob, can be wound around the neck. Plumb bobs are normally included in the electronic weighing kit.

l. Reaction points are those points upon which the entire weight of the aircraft is supported when scale indicator readings are taken. Most aircraft are supported on three reaction points; however, four or six reaction points are required for weighing some helicopters. Typical reaction points used for weighing aircraft are wheel, landing gear, fuselage, and wing jack pads.

m. Spirit Level. At least one spirit level is required for leveling most aircraft. It is important that the level be of the machinist bench type and of first-class quality with ground and graduated main vials and plumb vials. A calibrated inclinometer or digital protractor may be used in lieu of a spirit level on some aircraft.

n. Steel Tapes. A steel tape 600 inches in length and graduated in inches and tenths of inches is desired. Since all weighing dimensions must be read to one tenth of an inch, and are frequently read to one hundredth of an inch, this type of tape eliminates the nuisance and the possibility of errors associated with converting common fractions to decimals. Tapes, as described, are usually in the electronic weighing kit.

SECTION II WEIGHING PRACTICES AND PROCEDURES

3-6. PREPARATION OF AIRCRAFT FOR WEIGHING. The following general procedures are outlined as an aid to preparing the aircraft for weighing. Detailed weighing instructions for a specific type of aircraft are contained in the applicable maintenance manual for that aircraft.

a. Thoroughly clean the aircraft inside and out, removing dirt, grease, and moisture. Allow the aircraft sufficient time to dry prior to weighing.

b. Remove load items such as expendables, ordnance, and equipment not having a fixed position. For example: missiles, rockets, ammunition, cargo, flyaway gear, chocks, toolboxes, survival kits, etc. These items are not included as Chart A and should not be in aircraft when weighed.

c. Check aircraft equipment against Chart A and correct form as necessary to itemize accurately all items of fixed operating equipment that will be included in basic weight to be determined by weighing. The Chart A serves as a check list for this operation and is necessary to accomplish the inventory. When such a list does not accompany the aircraft, it is the duty of the Weight and Balance Technician to prepare one before weighing. The date the inventory is accomplished will be entered at the top of the check column of Chart A; this shall correspond with that date entered on Form B and final entry posted on Chart C. This inventory shall be done under the supervision of the Weight and Balance Technician responsible for the aircraft IAW DD Form 365.

d. The following actions must be performed prior to aircraft weighing:

(1) Review aircraft logbook forms and records (DA Form 2408-13-1 and DA Form 2408-14) to ensure all aircraft parts/items are installed prior to weighing.

(2) Review aircraft historical forms and records (DA Form 2408-5 and DA Form 2408-5-1) and the Chart C to ensure all applied modifications has been properly documented on all appropriate forms and records.

(3) The Weight and Balance Technician assigned to the aircraft IAW the DD Form 365 shall ensure that all required parts/items are installed on the aircraft prior to record weighing.

NOTE

Master Charts A are available at Army's Aeromechanics website at https://www.jtdi.mil and should be implemented during the annual aircraft inventory and/or an official aircraft weighing.

e. Prepare aircraft fuel tanks in accordance with applicable maintenance manuals (alternate source is Chart E instructions). All engines, transmissions, reservoirs, and/or tanks should be full unless otherwise specified in the applicable aircraft weighing instructions. Weighing aircraft with full fuel tanks is not recommended and in some instances not authorized. If it is impractical

to drain the fuel (usually because of fire hazards or local regulations), fill the tank(s) to capacity using the gravity open-port method. Since the density of the fuel varies with temperature and other factors, determine the actual density (weight per gallon) by using a hydrometer. Multiply the density by the gallons of usable fuel capacity obtained from the operator's manual (Chart E) to determine the total usable fuel weight. The total weight of fuel aboard may be calculated by multiplying the total number of gallons aboard by fuel density.

NOTE

Fuel draining should be terminated when fuel flow becomes discontinuous or starts to drip. All draining is generally done in the aircraft normal ground attitude.

(1) If the aircraft is weighed with full fuel tanks, the weight of usable fuel must be entered under Column I on Form B. Usable fuel is not part of basic weight. Never weigh an aircraft with partially filled fuel tanks.

(2) Allow sufficient time for fuel temperature and movement to stabilize after refueling and aircraft positioning for weighing. When determining the density of a fuel sample, the hydrometer should be carefully placed into the fluid within the transparent container. When reading the density, the hydrometer must not touch the container. Float hydrometer in a sample of fuel from each tank just prior to weighing and record the weight per gallon; read this value at the lowest point of the meniscus (see Figure 3-4).

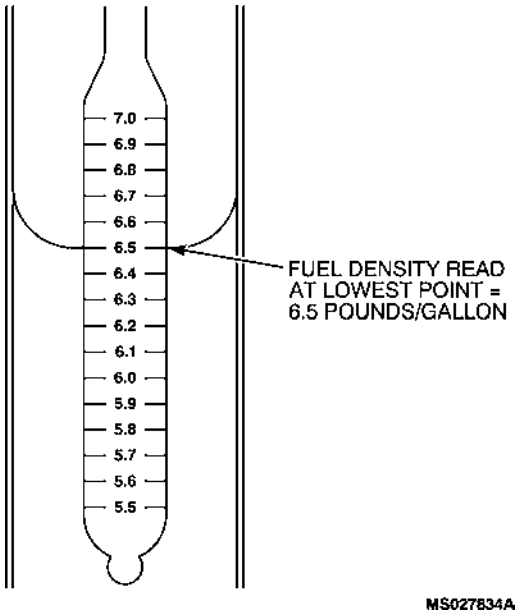


Figure 3-4. Lowest Point of Meniscus

(3) If the aircraft is weighed with drained fuel tanks, unusable fuel listed on , Chart A will reflect "IN A/C" and the data also entered on Form B, Column II.

(4) If the aircraft is weighed with a totally dry fuel system(s), unusable and trapped fuel listed on , Chart A will reflect "IN A/C" and the data also entered on Form B, Column II.

NOTE

It is not the intention herein to give detailed instructions on methods used to level aircraft, since methods vary with the type of aircraft and the reaction points used. Normally aircraft are weighed in a level position, which is defined as that aircraft attitude in which the longitudinal and lateral axes are essentially parallel to the hangar floor. Leveling devices such as leveling lugs and jig-located brackets and plates have been accurately installed on the aircraft by the manufacturer to facilitate leveling procedure.

3-7. AIRCRAFT CONFIGURATION FOR WEIGHING. The following conditions are general guidelines to establish Basic Weight condition. Some aircraft maintenance manuals may require alternate configurations to comply with specific aircraft design.

- Pilot/crew access doors closed
- Cargo doors closed
- Gunner's window(s) closed
- All main rotor pylon panels closed
- Access compartment door/panel closed, latched, installed
- Engine cowling closed
- Main and tail rotor blades in flight position and equally spaced (not folded)
- Vertical tail in flight position
- Horizontal tails in flight position (level)
- Unusable fuel (Unusable fuel is the fuel remaining in the aircraft after engine fuel starvation when the aircraft is in the specified flight attitude)
- Trapped fuel. (Trapped fuel is the fuel that remains in an aircraft after de-fueling the aircraft and draining individual tanks and lines
- Unusable Oil in systems
- Usable engine oil (normal full level)
- Usable hydraulic fluid
- Usable transmission fluid
- Usable gearbox oil
- Pilot and copilot seat in most aft position
- Trackable swivel seats in most aft position, facing forward, seat back in upright position
- All covers, plugs, ropes, etc… removed

3-8. AIRCRAFT WEIGHING AREA. Procedures outlined herein are general in nature, since methods of weighing vary with each type aircraft.

a. Weigh aircraft in a closed hangar to avoid air currents flowing over lifting surfaces and blowing against the fuselage. This air movement would result in fluctuating scale readings and increase the possibility of error. No ventilating system air shall impinge upon the aircraft.

b. Select weighing area that is free of cracks, seams, and drain areas. The floor slope shall not exceed 1/4 inch (1.2 degrees) per 12 inches. To determine floor slope, contact supporting Department of Public Works (DPW) or servicing agency for hanger floor survey. For a field expedient method, contact supporting unit Logistics Assistance Representative (LAR).

CAUTION

Excessive side loads may cause load cell breakage and incorrect readings. During leveling procedure, extreme care should be exercised to avoid side loads which may cause the aircraft to slip off jacks. For example, when main landing gear jacks are in place while the tail is lifted to a level position, it is likely that side loads caused by rotation of the fuselage will cause jacks to slip off the jack points causing severe damage personnel, aircraft, and/or equipment. When raising the aircraft with two wing or main landing gear jacks, actuate the two jacks simultaneously to maintain a laterally level attitude.

NOTE

Before attempting to raise an aircraft, relative heights of main and nose or tail landing wheels in both three-point and level attitudes should be considered in order to determine the proper blocking, lifting, and/or jacking equipment required. Raising a tail wheel to level an aircraft may be quite a problem unless adequate lifting, hoisting, and supporting equipment is available. Jacks should never be employed at any place on the aircraft other than specified jacking points.

NOTE

If wing and fuselage jacks are used to level the aircraft, shock struts should be restrained to prevent them from extending when aircraft is raised.

NOTE

Adjust weighing equipment for current location's latitude and altitude IAW the scale manufacturer's procedures.

c. Set load cells on their respective jacks, using proper jack, and jack pad adapters. Be sure that jack adapters are fully threaded into cell assembly. If a ring-type adapter is used, see that it is centered flush on ram applying a partial load to it before tightening setscrews. Once the load cell is properly installed and

the necessary jack pad adapter is attached, the jack must be placed directly under the corresponding aircraft jack pad. When the aircraft is raised and leveled, its weight is measured and transmitted electronically from the load cells to a weight readout device. Complete operating instructions accompany each weighing kit. Strict adherence to the instructions is necessary to ensure accurate results.

CAUTION

Use proper jack pad adapters to prevent jacks from slipping or buckling. Damage to aircraft or inaccurate weight readings may result if improper adapters are used. Never apply loads to the rim of a weighing cell.

CAUTION

Ensure all jack foot pads are properly seated on hangar floor.

d. Actuate all jacks simultaneously until weighing cells are in contact with aircraft jack pads. Apply actual aircraft weight load two times as part of the warm-up procedure. This will increase the accuracy of the actual record weighings. Continue to jack aircraft, ensuring the aircraft is kept level in accordance with aircraft maintenance manual(s). When aircraft is supported at weighing reaction points only, and is in level position, scale readings may be obtained. Weight and balance personnel must be alert for possible errors in scale readings (e.g., side loads or misaligned jack and cell, etc.).

NOTE

If the plumb bob target plate is missing, covered, or accuracy is questioned, contact the Airframe LAR for further assistance.

e. Measure and record dimensions once aircraft is in a level position. Three longitudinal dimensions must be either measured or otherwise known to determine the longitudinal location of the center of gravity of the aircraft as weighed. When landing gear are used as reaction points, dimensions to be determined are as follows:

NOTE

The Basic Lateral cg is zero (0) unless otherwise specified by the aircraft's operators manual.

(1) The longitudinal distance from the reference datum to some known jig point. It is not necessary to measure this distance as it is given in the appropriate maintenance manual (Chart E data) and will remain fixed.

(2) The distance from the jig point to a lateral line passing through the main reaction points. This measurement must be made along a line which is parallel to the longitudinal axis of the aircraft.

(3) The wheel base or distance between the main and forward or aft reaction points.

f. Measure dimension in steps (2) and (3) above by projecting required points to hangar floor. Project jig point to hangar floor by suspending a plumb bob from center of jig point so that plumb bob is approximately 1/8 inch above floor. Wait until swing of plumb bob stops, and make a cross mark on floor directly under tip of plumb bob. Print words JIG POINT near cross on floor to distinguish it from other projected points. Main reaction points are projected in the same manner as described above for the jig point. After marking crosses for the two main reaction points, stretch a chalked string between them and draw taut. Snap string against floor, leaving a visible straight chalk line between main reaction points. Nose or tail reaction point is projected in a similar manner to plumb bob method.

g. Measure required dimensions after these points are projected to floor. Dimensions to be measured are listed as B and D on Form B. Distance B is the same dimension as discussed in step (2) above. It is the perpendicular distance from the projected jig point to the chalk line between the main reaction points. Distance D is the same dimension as referred to in step (3) above. It is the wheel base, or distance from the centerline of the main reaction points to the nose or tail reaction points. When measuring these distances, it is necessary that the tape be parallel to aircraft centerline. Measurements made from the main reaction points are taken perpendicularly to the chalk line joining these two points. These measurements may be made quickly by placing one end of the tape on the point in question and swinging the other end of the tape across the line in a small arc. Notice the point at which the tape crosses the chalk line which shows a shorter distance than any other along the line. This is the shortest distance between the line and the point in question and, therefore, is the perpendicular distance from the point to the line. When fuselage and wing jack points are used as reaction points in weighing the aircraft, it is unnecessary to measure dimension. These points will remain fixed with respect to the reference datum and their moment arms may be found in the applicable maintenance manual (Chart E data). When measuring is necessary, the required dimensions should be recorded on Form B as soon as the measurements are taken.

h. To ensure accuracy of results, a minimum of two independent weighings shall be performed that meet the tolerances listed below. The individual weighings do not have to be consecutive.

NOTE

If variations in scale indications for any reaction point are greater than that prescribed in the technical manual covering the kit, reweigh aircraft with another weighing kit.

1. Rotor-Wing, Fixed-Wing, and UAV Aircraft 0.25% of Total (as weighed) weight and 0.10 inches in arm or 0.1% MAC (as applicable).

NOTE

Both weight and arm / % MAC tolerances shall be met.

2. Example: During the first weighing, the aircraft weighed 14,523 lbs with an arm of 309.3 inches (29.3% MAC). The tolerances for the second weighing are +/-36 lbs (14,523 X 0.0025= 36) which results in a range from 14,487 to 14,559 lbs. The arm range is 309.2 to 309.4 inches or 29.2% to 29.4% MAC.
3. If these constraints are not met, additional weighings shall be made until they are satisfied. Average the Net Weight and Measurements of the two suitable weighings to complete a Form B.

i. Before removing the aircraft from the scales, make certain that all necessary measurements and scale readings have been obtained and recorded.

j. Compute the difference between the calculated weight and arm (last entry on Chart C) and the actual Basic Aircraft Weight and Arm to be posted to Chart C (see Form B). If the weight differs more than 0.4% (WT X 0.004) or the arm differs more than 0.2 inches or 0.2% MAC, accomplish the following:

1. Check calculations for errors.
2. Check scales for overdue calibration.
3. Check scales for correct altitude and latitude adjustments IAW the scale manufacturer's procedures.
4. Check slope of weighing area (REF PAR 3-8).
5. Check for hangar doors closed, fans and heaters off.
6. Check the Plumb Bob for proper installation. i.e. string positioned in center of bracket V-notch. Does the Plumb Bob, Digital Protractor, or other leveling tool show required longitudinal and lateral angles/alignment?
7. Check aircraft (inside & out) to ensure that it is clean and completely dry.
8. Check to ensure chocks, flight gear, survival kits, fly-away gear, blade ropes, engine covers, and other non-basic weight items were removed.
9. Check that aircraft doors and panels were in proper configuration.
10. Check fuel tank sump drains for lack of fuel flow (if defueled) making sure an appropriate container is in place in the event of fuel discharge.
11. Check fuel quantity and density if aircraft was not defueled (if authorized). Aircraft must be fueled using the gravity open-port refueling method to ensure maximum usable fuel capacity is achieved. Do not use aircraft fuel quantity indicators to determine the quantity. Use the applicable operators manual (-10) for usable fuel capacities.
12. Check Chart C for errors since the last weighing.
    - A. Posting Turned - Off.
    - B. Aircraft Modificaitons.
    - C. Chart A inventory doesn't match the aircraft's weighing condition.
13. Did any maintenance action take place between inventory and weighing?
14. If errors are found, correct and repeat two additional weighings (if applicable) that meets the repeatable tolerances IAW PAR 3-8.h.
15. If no errors are found, post the weighing.

CHAPTER 4
WEIGHT AND BALANCE RECORDS

SECTION I TYPES OF FORMS

4-1. GENERAL. Specific weight and balance data is contained in the -10 operator's manual and the applicable maintenance manual for each Army aircraft. Standard forms are used in conjunction with this data to provide an effective system for weight and balance control. Information to be inserted on the charts or forms is applicable only to the individual aircraft, the serial number of which appears on the various charts and forms. The weight and balance data and related forms for aircraft are maintained in accordance with AR 95-1 and AR 95-23. Entries on DD Form 365, DD Form 365-1, and DD Form 365-3 will be made using a pen, typewriter, or a rubber stamp. Felt tip pens or grease pencils will not be used. Pencils may be used on DD Form 365-4. Electronic signatures are authorized when using computer data sheets (i.e: AWBS). Enter aircraft serial number format IAW DA PAM 738-751. The forms referred to herein may differ from time to time, but the general principles behind their use will remain the same. Weight and balance of aircraft is controlled and standardized through the use of the following charts and forms:

a. DD Form 365 (Record of Weight and Balance Personnel).

b. DD Form 365-1 (Chart A – Basic Weight Checklist Record).

c. DD Form 365-2 (Form – B Aircraft Weighing Record).

d. DD Form 365-3 (Chart C – Basic Weight and Balance Record).

e. DD Form 365-4 (Weight and Balance Clearance Form F – Transport/Tactical).

f. Chart E (Loading Data and Special Weighing Instructions).

4-2. RESPONSIBILITY FOR DD Form 365 SERIES AND CHART E. Before delivery of an aircraft, DD Form 365 the manufacturer is responsible for inserting all aircraft identifying data on the various charts and forms. The manufacturer completes all forms in AWBS format. All DD Form 365 series charts and any other pertinent weight and balance data relating to an aircraft will be maintained in a permanent binder for the aircraft. The binder and all forms contained therein will bear the aircraft designation and serial number. Any change that affects aircraft weight and balance will be reflected in these forms.

4-3. DISPOSITION OF WEIGHT AND BALANCE FORMS. Weight and balance forms are to be safe-guarded and maintained with the same degree of importance as other records maintained for each aircraft.

a. The individual weight and balance forms serve various purposes. Therefore, the retention period of the forms will vary, as follows.

(1) The DD Form 365 Record of Weight and Balance Personnel is a semi permanent form. It will be retained in the aircraft's weight and balance file until space for additional entries has been exhausted and a new replacement form started. At the time, the replaced form may be destroyed locally.

(2) The DD Form 365-1 Chart A – Basic Weight Checklist Record (Chart A) us a permanent form and will be retained in the aircraft's Weight and Balance file for the life of the aircraft. As new forms are started because of exhausting entry space, the new form will be stapled to the original form.

(3) The DD Form 365-2 Form B – Aircraft Weighing Record (Form B) is a semi-permanent form. The current completed form will be retained in the aircraft's weight and balance file until the aircraft has been reweighed, a new form started, computations verified, and necessary entries made on the Form B. Upon completion of the above, the old Form B may be destroyed locally.

(4) The DD Form 365-3 Chart C – Basic Weight and Record (Chart C) is a continuous and permanent history of the aircraft Basic Weight, Basic Moment, and Basic CG position. The form will be retained in the aircraft's Weight and Balance file for the life of the aircraft. As new forms are started because of exhausting entry space, the new form will be stapled to the original form.

(5) The DD Form 365-4 Weight and Balance Clearance Form F (Form F) which has been used to compute standard loads, utilizing the aircraft's current basic weight, is considered a current work form as long as the load weights and locations remain current and until the basic aircraft weight has been recomputed/changed. A copy of the current form will be retained in the aircraft's weight and balance .le until the entries require revision at which time the old form will be destroyed locally or marked void.

(6) Chart E, Loading Data and Special Weighing Instructions. The Chart E is considered a semi–permanent Chart and is to be retained in the aircraft's weight and balance file until a revised Chart E is published in the aircraft maintenance manual. Following publication of the Chart E in the maintenance manual, the Chart E in the aircraft file is no longer required and shall be removed and destroyed locally.

b. The weight and balance file shall be maintained and kept current for each aircraft from the time of delivery of an aircraft to the Army until salvage or retirement of the aircraft. Upon transfer of an aircraft, the commanding officer of the transferring activity is responsible for insuring the weight and balance file accompanies the aircraft.

c. Any of the DD Form 365 series can be duplicated for reason of replacing lost, mutilated, or illegible forms. When the action is taken, each form duplicated shall contain a statement to the effect that the entries are certified true and accurate, followed by signature of certifying individual, date, and organizational identity. Duplication of lost or illegible forms requires a physical inventory for Chart A and weighing the aircraft for Form B.

d. The aircraft weight and balance file for aircraft stricken from the Army inventory is to be disposed of as follows:

(1) Destroyed/damaged aircraft. Destroy file locally, after necessary investigation and reporting, provided the aircraft does not fall into any of the following categories:

(a) Weight and balance records of aircraft that have been involved in accident(s) resulting in death or injury to any person, and/or damage to other than Government property that is classified as combat loss IAW AR 385-10, para 2–5 are to be disposed of IAW Final Disposition Instructions issued by AMCOM, AMSAM-MMC-MA-OS. If the loss is not classified as combat loss IAW AR 385-10, para 2-5 the weight and balance records are to be stored and secured with the wreckage and treated as legal evidence IAW DA PAM 27-162. The period of retention is variable; Final Disposition Instructions will not be issued from AMCOM, until a letter of release is issued by controlling Staff Judge Advocate (SJA), with AMCOM legal review and concurrence.

(b) Damaged aircraft which are uneconomical repairable (by Army standards), under disposal conditions, may be transferred or offered for sale to other than an Army custodian. The weight and balance file for such aircraft shall accompany the aircraft to the acquiring agency/individual(s).

(2) Excessed aircraft. For aircraft whether in a serviceable or repairable condition which are to be transferred or offered for sale to other than Army custody, the weight and balance file will accompany the aircraft to the acquiring agency/individual(s).

4-4. RELATED PUBLICATIONS.

a. AR 95-1 Aviation Flight Regulations

b. AR 95-23 Aviation Unmanned Aircraft System Flight Regulations.

c. DA PAM 738-751, Functional users manual for the Army Maintenance Management System–Aviation (TAMMS-A).

d. Society of Allied Weight Engineers, Inc (SAWE) Recommended Practice Number 7 (RP 7).

SECTION II INSTRUCTIONS FOR USE OF DD FORM 365 SERIES AND CHART E

4-4.1. Deleted.

4-5. DD FORM 365, RECORD OF WEIGHT AND BALANCE PERSONNEL. DD Form 365 (see Figure 4-1) provides a continuous record of weight and balance personnel (civilian or military) who is responsible for correctness and maintenance of the weight and balance records for a specific aircraft. The form has spaces for model/design, serial number, name, grade, station, date assigned and date relieved from duty of weight and balance personnel. The WHERE AND WHEN block is not required to be completed on this form. The last entry shall indicate the Weight and Balance Technician who is currently responsible for maintaining the specific aircraft's Weight and Balance file.

a. The weight and balance technician will transfer when one or more of the following occur:

(1) Aircraft is transferred/received to a new organization.

(2) Work ordered to next level maintenance which results in the weight and balance records requiring updates. An update constitutes any entries made to the Chart C.

RECORD OF WEIGHT AND BALANCE PERSONNEL	FOR USE WITH TM 55-1500-342-23, MIL-STD-1629A, TM 55-1500-342-25	Form Approved OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 10 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS

MODEL/DESIGN	SERIAL NUMBER

NAME *(Last, First, Middle Initial)*	GRADE, RATE, OR RANK	WHERE AND WHEN QUALIFIED	STATION	DATE ASSIGNED *(YYYYMMDD)*	DATE RETIEVED *(YYYYMMDD)*

DD FORM 365, AUG 96 (EG) PREVIOUS EDITION MAY BE USED. Designed using Perform Pro, WHSDOR, Aug 96

MS027835

Figure 4-1. DD Form 365

4-6. DD Form 365-1 CHART A-BASIC WEIGHT CHECK LIST RECORD.

a. There are two primary purposes of the Chart A.

(1) A definition of what is included in Basic Weight for the particular aircraft.

(2) Mass properties data for items that may be removed from or added to the Basic Weight of the aircraft.

b. The Basic Weight Check List Record (see Figure 4-2) is a list of all equipment that is or may be installed and for which provisions or fixed stowage has been made in a definite location in the aircraft. Items should be listed on the Chart A only if they weigh 1.0 pound or more for aircraft under 5,000 pounds weight empty (OH-58's), 2.0 pounds or more for aircraft between 5,000 and 50,000 pounds weight empty, and 5.0 pounds or more for aircraft greater than 50,000 pounds. Weights are listed to the tenth of one pound. Items which weigh less than the above criteria may be listed if it facilitates the aircraft inventory process. Further guidance may be found in SAWE RP 7 (Mass Properties management and Control for Military Aircraft.

(1) The weight, arm, and moment or simplified moment (moment divided by 100 or 1000) of the individual items must be listed for use in correcting the aircraft basic weight and moment on the Chart C as changes are made in these items. All entries shall be typed or clearly written in ink. When check marks (X) and zeros (0) are entered in the IN AIRCRAFT column, the Chart A serves as a record of equipment included in the basic weight of the aircraft at the last inventory. When a check mark is entered in Chart C ENTRY column, the check mark is an indication that an entry has been made in the Chart C as a result of a change in the status (in or out of the aircraft) of an item since the previous inventory.

NOTE

Marks in the In Aircraft and Chart C Entry columns are made only at the time of a complete inventory. Never change the marks or add new ones under a previously accomplished inventory.

(2) Weights, Arms, and moments shall be listed to one decimal place. Moments are simplified by a constant (100 or 1,000).

c. The Chart A inventory shall be performed whenever:

(1) The aircraft is transferred to a new unit with a change of weight and balance technician.

(a) The custodian receiving the aircraft shall perform a Chart A inventory of the aircraft to ensure that the delivery condition or assumed operating condition recorded by the manufacturer in Charts A and C matches the actual operating condition to be used by the custodian. If not, the necessary adjustments shall be made.

(2) The aircraft has a major overhaul. For example, the following actions could constitute a major overhaul: aircraft phase inspection involving replacement of large items such as main transmission, rotor head, extensive airframe repair, RESET, tail boom replacement, etc.

(3) The pilot reports unsatisfactory flight characteristics with weight and/or balance implications.

(4) The aircraft is weighed.

(5) At time intervals required by regulation.

d. The initial Chart A for each aircraft is established by the manufacturer as follows:

(1) At the time of delivery, the manufacturer inserts the designation of the AIRCRAFT MODEL (MODEL/DESIGN) and SERIAL NUMBER in the spaces provided at the top of the Chart A. Enter serial number formatted IAW DA PAM 738–751.

(2) Each CHART A item shall be assigned an alphanumeric number. These numbers shall run consecutively and indicate the alphabetical designation of the compartment; for example, items A-1, then A-2, then A-3 and so on listed compartment A. These item numbers shall be listed in the column titled COMPARTMENT AND ITEM NUMBER.

(3) The alphabetical and descriptive designations for each aircraft compartment (in capital letters, such as A-NOSE) shall be shown in the ITEMS AND LOCATION column at the top of each compartment's equipment list. The compartment designation shall be underlined and separated from the equipment list by one blank line. The dimensional limits of each compartment shall be stated in terms of inches from the reference datum, such as A-NOSE STA 5 - 64, B-PILOTS STA 64 - 104, and should agree with those compartment limits shown in the aircraft's operators manual (Chart E). Compartment equipment lists documented in the ITEMS AND LOCATION column shall present individual operating equipment items by description and part number (such as, Preamplifier APR-25/AM-2348 and/or PN 12345). The description and part number presented in this column shall be common with that shown on the equipment item identification plate or applicable aircraft parts manual. Equipment within each compartment

should be listed such that the arms (in the column titled ARM) progress numerically from the forward to the aft limit of the compartment. If a compartment is divided into an upper and lower section, all items within one section should be listed before continuing to the next section.

(4) The weight, arm, and moment of each item shall be listed in the appropriate columns. A constant may be used to simplify the moment. If a constant is used, it will be listed at the top of the MOMENT column.

(5) The manufacturer of the aircraft places check marks or zeros in the first IN AIRCRAFT column under the RECORD OF CHECKING section of the Chart A. This is done at the time of delivery of the aircraft to indicate its delivery condition. This delivery inventory shows the equipment that is included in the aircraft's initial basic weight and moment as listed on the Chart C.

e. All Chart A inventories subsequent to the manufacturers delivery inventory shall be completed as follows:

(1) Inspect the aircraft for equipment actually installed. Place the date on which the inventory was made at the tip of the next unused RECORD OF CHECKING column. If all columns have been used , complete a new Chart A and mark the entries in column 1. Place a check/X in the IN AIRCRAFT COLUMN if in the aircraft or a zero to indicate its absence. When missing basic weight items are added to column II on the reverse side of FORM B, they should be checked on Chart A as IN AIRCRAFT.

(2) Compare this new inventory with the last completed inventory under the RECORD OF CHECKING column, noting any changes in the items installed in the aircraft. Refer to Chart C to make certain whether the necessary weight and moment corrections have been made. If so, place check marks opposite such items in the Chart C ENTRY column of Chart A. If not, correct the calculated basic weight and moment data on Chart C and then enter the Chart C ENTRY column check marks. A check mark in the Chart C ENTRY column indicates that the appropriate weight and moment change has been recorded on the Chart C. Make sure that the inventory date is entered in the RECORD OF CHECKING column on the Chart A. Enter the same date in the DATE column of the Chart C for the corresponding weight and moment calculations.

f. When a new item of equipment which is not listed on the Chart A is added to the aircraft, determine its weight, arm and moment from the applicable Modification Work Order (MWO) or by actual measurement and calculation. Enter an item number, the name or description, weight, arm, and simplified moment on an open line under the proper compartment on the Chart A. Also, make the required entry on Chart C. When a new Chart A is initiated, the entries should be rearranged so that the equipment within each compartment is listed such that the arms (in the column titled ARM) progress numerically from the forward to the aft limit of each compartment. Then numerically rearrange item numbers in sequence.

g. Chart A is used primarily as a record of all items installed at the time the aircraft is weighed. When equipment is permanently removed, refer to the instructions for Chart C form entries. When a complete inventory is made, line completely through the removed items from the compartment and item number column through the check column on the Chart A. When all the check column blocks have been filled, it will not be necessary to include those items lined out when initiating new forms.

(1) The following list represents types of items which should be tabulated on the Chart A:

- Aircraft Battery
- Armament systems
- Auxiliary power unit
- Avionics equipment (not including mounts)
- Ballast, permanent and/or temporary
- Ballistic protection systems (removable)
- Doors
- Emergency axes, first aid kits
- Engine Oils
- Engines/Assemblies
- Fire extinguisher
- Heating and cooling equipment
- Mission Equipment
- Hoists and winches
- Navigational equipment
- Oxygen equipment
- Ramps
- Rotor blades
- Seats and related equipment
- Unusable and trapped fuels (separate entries)

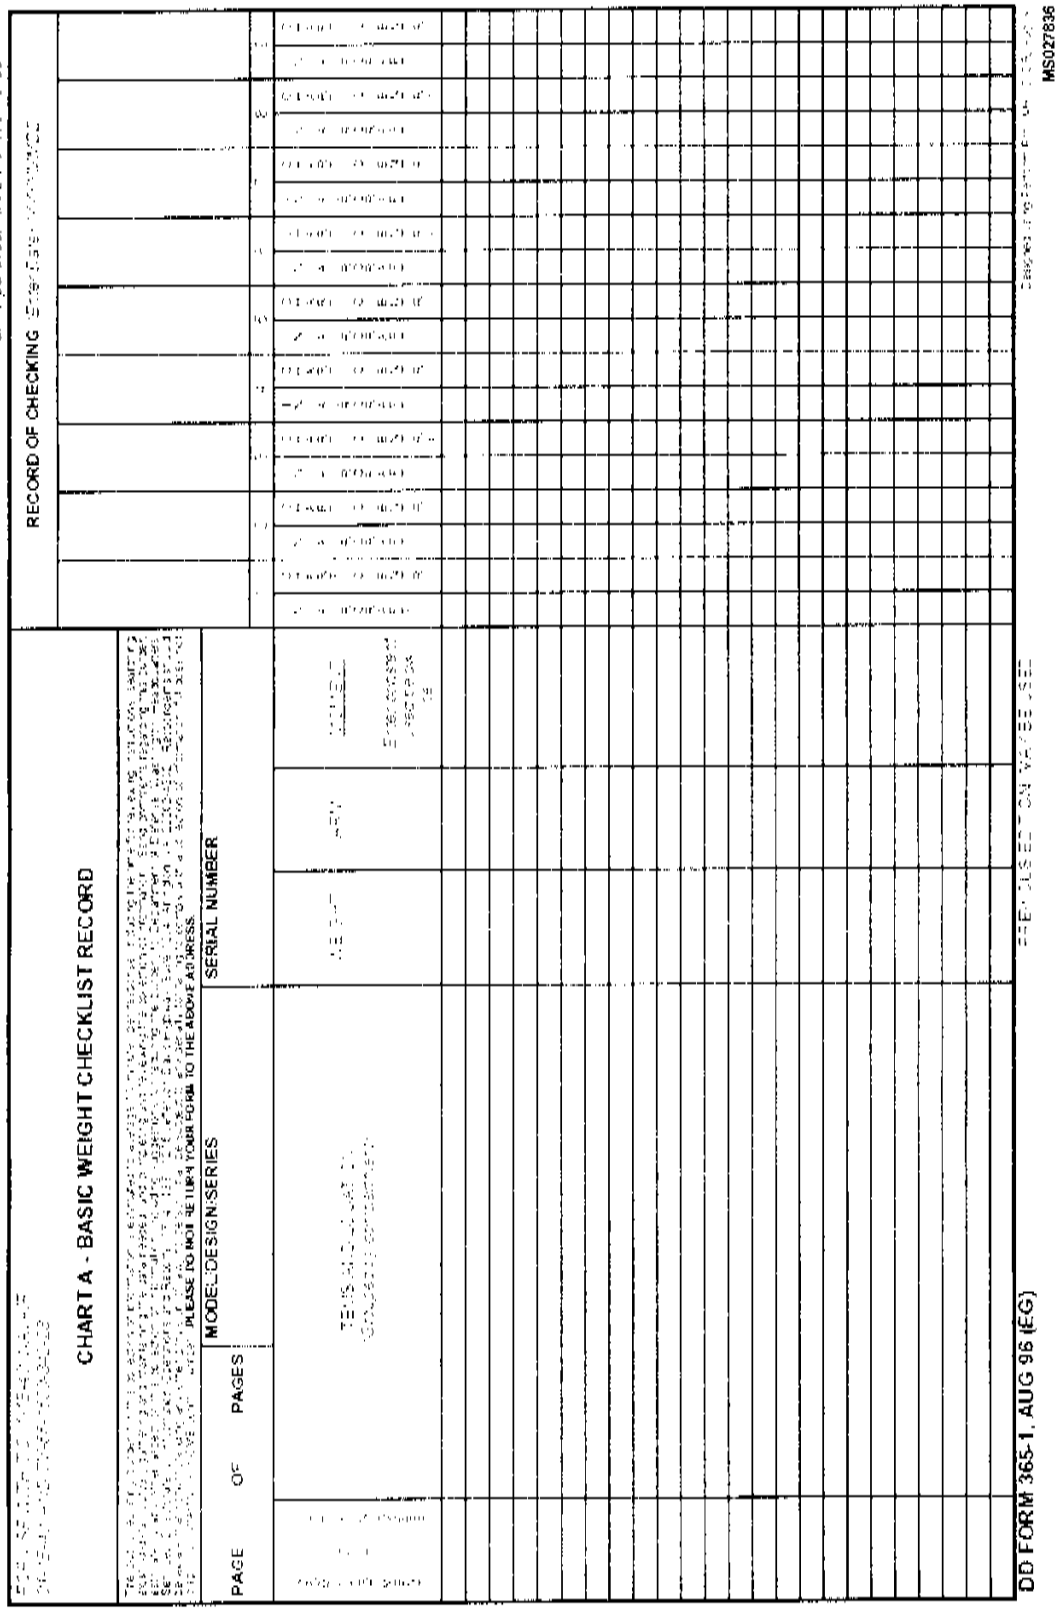


Figure 4-2. DD Form 365-1

4-7. DD Form 365-2, FORM B – AIRCRAFT WEIGHING RECORD. This form is used to record the data obtained from actual weighing. The form provides the necessary instructions for computing the current Basic Weight, Basic Arm (CG), and Basic Moment of the aircraft. Diagrams of the aircraft are shown in figure 4-3 to illustrate dimensions required during weighing process. Form entries are made as follows:

a. Fill in identifying data and enter actual scale reading in first column.

b. Record measurements taken at time of weighing. Only dimensions B and D need actually be measured. Distance I, from the reference datum to jig point, is obtained from appropriate aircraft manual(s) (Chart E data). Dimensions E is determined by addition or subtraction (average the two dimensions).

c. In the separate CORRECTIONS block, enter the CALIBRATION CORRECTION as given by the calibration laboratory; SCALE CORRECTION factor (correction factor necessary when the scale does not return to zero after unloading and gravitational or latitude correction factor such as Tare - see scale operating instructions); TEMPERATURE correction factor (see scale operating instructions); EQUIPMENT such as chocks, blocks, slings, and jacks included in the scale reading but not part of the aircraft weight, and any other appropriate corrections. Tare is the weight of supports, such as jacks, that may be placed on a platform scale to raise the aircraft or residual weight reading on a particular load cell/platform scale after load is removed for two minutes. The CORRECTIONS column shall be used to record tare and/or correction factors. Follow the instructions provided in the Technical Manuals for the specific weighing system being used to arrive at net weight. Add all the corrections and enter in the appropriate blocks. Enter the sum correction value in the CORRECTIONS column of the Form B and adjust the actual scale reading data in the SCALE READING column to obtain the net weight. Enter in the NET WEIGHT column.

d. Multiply subtotal net weight of reaction (jack points) by their respective arms (dimensions E and F) to obtain their moments.

e. Add net weights and moments of reaction (jack points).

f. Divide total moment by total net weight to obtain as weighed cg location in inches from reference datum. Enter this distance in Total Block under ARM column.

NOTE

Use the TOTAL (as weighed) weight and arm values for the repeatable reference tolerances of ± one quarter of one percent in weight and ± 0.10" in cg (Example: If the total reading was 11,600 pounds for the first weighing, the tolerance for the second weighing is ± 29 pounds. 11,600 x 0.0025 = 29 or a range from 11,571 to 11,629 pounds).

g. Average each reaction's NET WEIGHT and measurement dimensions of the two acceptable weighings to complete a record Form B.

h. Transfer TOTAL (as weighed) weight, arm, and moment to the reverse side of form.

i. Record weight and moment of all items in aircraft when weighed that are not a part of basic weight (COLUMN I, reverse side of aircraft weighing record form).

j. Record weight and moment of all basic items that were not in aircraft when weighed (COLUMN II, reverse side of aircraft weighing record form). Items listed in this column must be checked on Chart A as IN AIRCRAFT to indicate their inclusion in basic weight.

k. Subtract total weight and moment of items entered in COLUMN I.

l. Add total weight and moment of items listed in COLUMN II to obtain basic aircraft weight and moment respectively.

m. Divide basic moment by basic weight to obtain basic arm. Transfer basic weight and moment to Chart C.

n. Reactions Used: Enter "Jack points or wheels" (as applicable) used.

o. Type Scale (Scale information):

(1) Enter Model and manufacture of scales/load-cells.

(2) Serial number of each scale/load-cell shall be listed. Do not list the scale set serial number. (use the REMARKS block if more room is required for data entry).

(3) Calibration Accuracy: This block is not used.

(4) Calibration Date: Enter the date when scales/load-cells were last calibrated.

p. Remarks: At a minimum, the following information shall be entered: “Acft washed, dry, fuel system empty or full using open-port method (select one), Fuel density x.x lbs per gal, (if fuel system is full), weighed in level or non-level condition (select one), aircraft weighed at 0 degrees nose up attitude or x.x degrees nose up attitude (select one), inside enclosed hangar, using jack/load cells or platform scales (select one). Scale Settings: Altitude:_____ and Latitude:_____." The AWBS software may populate some/all required information.

FORM B - AIRCRAFT WEIGHING RECORD

FOR USE WITH T.O. 1-1B-40, NAVAIR 01-1B-40 AND TM-55-1500-342-23

Form Approved OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 10 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THIS ADDRESS.**

DATE WEIGHED *(YYYYMMDD)*	MODEL/DESIGN/SERIES		SERIAL NUMBER		
PLACE WEIGHED		WEIGHT AND BALANCE TECHNICIAN *(Last, First, M.I.)*			DUTY PHONE NO.

REACTION *(Wheels, jackpoints, etc.)*	SCALE READING	CORRECTIONS	NET WEIGHT	ARM	MOMENT
LEFT MAIN					
RIGHT MAIN					
SUB-TOTAL *(Both main)*				E	
NOSE OR TAIL				F	
TOTAL *(as weighed) Not to be posted on Chart C*					

MEASUREMENTS

B=_____ the distance from the jig point, to the center line of the main reactions. Obtain by measurement.


I=_____ the distance from the reference datum to the jig point of the aircraft, from which a plumb bob can be dropped to the ground. Obtain from the aircraft diagram in Chart E.

E=_____ [1] the distance from the reference datum to the center line of the main reactions.
E = I + B
E = I - B (If the jig point is aft of the center line of the main reactions.)

D=_____ the distance between the main and nose or tail reaction. Obtain by measurement.

F=_____ [1] the distance from the reference datum to the center line of the nose or tail reaction.
F = E - D (for nose reaction)
F = E + D (for tail reaction)

CORRECTIONS	LEFT MAIN	RIGHT MAIN	NOSE OR TAIL
CALB CORR			
SCALE CORR			
TEMP [2]			
EQUIP			
OTHER			
TOTAL			

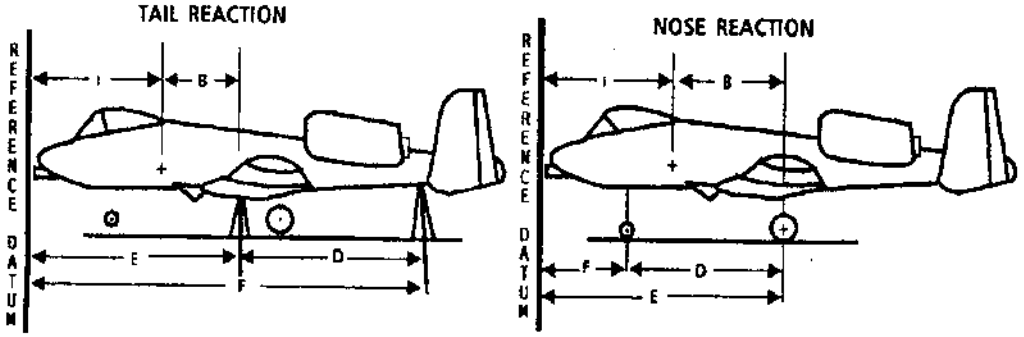

DIAGRAMS FOR MEASURING VARIOUS TYPES OF REACTIONS TO DETERMINE ARM OF SUPPORT POINTS.
See Aircraft Chart E's for specific weighing instructions.

[1] *Check dimensions E and F against approximate dimensions listed on Chart E.*
[2] *Enter temperature at time of weighing.*

DD FORM 365-2, AUG 96 PREVIOUS EDITION MAY BE USED. MS027837

Figure 4-3. DD Form 365-2 (Sheet 1 of 2)

DESCRIPTION	NET WEIGHT	ARM	MOMENT	/ INDEX OR MOM /
TOTAL *(As weighed) (From front side)*				
TOTAL OF ITEMS WEIGHED BUT NOT PART OF BASIC WEIGHED *(From Column I below)*	–		–	
TOTAL OF BASIC WEIGHT ITEMS NOT IN AIRCRAFT WHEN WEIGHED *(From Column II below)*	+		+	
BASIC AIRCRAFT *(Post to Chart C)*				

COLUMN I				COLUMN II			
ITEMS WEIGHED BUT NOT PART OF BASIC WEIGHT	WEIGHT	ARM	MOMENT	BASIC WEIGHT ITEMS NOT IN AIRCRAFT WHEN WEIGHED	WEIGHT	ARM	MOMENT
TOTAL				TOTAL			

REACTIONS USED

TYPE SCALE
SERIAL NUMBER
CALIBRATION DATE *(YYYYMMDD)*
CALIBRATED ACCURACY

REMARKS

1 Enter constant used

DD FORM 365-2 (BACK), AUG 96

MS027838

Figure 4-3. DD Form 365-2 (Sheet 2 of 2)

4-8. DD FORM 365-3, CHART C – BASIC WEIGHT AND BALANCE RECORD.

a. The Chart C is a continuous and permanent history of the aircraft Basic Weight, Basic Moment and Basic CG position (see Figure 4-4). All permanent changes to the aircraft basic weight and moment, regardless of size, shall be recorded (typed or clearly written in ink) on the Chart C to keep it correct and up-to-date. The last Basic Aircraft Weight, Moment, and CG or Index shall be considered the most current data and the baseline for all subsequently dated aircraft loading calculations. Weights, Arms, and moments shall be listed to one decimal place. Moments should be simpli.ed by a constant (100 or 1,000).

b. At the time of delivery of a new aircraft, the manufacturer enters the aircraft basic weight, moment, and cg or index on the Chart C. The itemized list of the equipment which is included in the aircraft basic weight is shown in the first IN AIRCRAFT column under the RECORD OF CHECKING section of the Chart A.

c. Additions and/or subtractions to the basic weight and moment/index on Chart C will be accomplished as follows:

(1) Whenever equipment is added to or removed from the aircraft, an entry must be made on this chart. If the item is listed on the Chart A, enter the identical item number, description and applicable weight, arm, and moment data on the Chart C. If the item is not listed on the Chart A, determine its weight, arm, and moment by actual measurement or obtain this data from the applicable MWO and record it on the Chart C. Add a Header that reflects the completion of the modification. Any change which is caused by a specific MWO will carry a reference to the MWO number. Do not enter check marks on the Chart A for these items until a complete inventory is made.

(2) Subsystem modifications or structural changes shall be recorded in the same manner with the change in weight and moment added to or subtracted from the current total. Whenever such changes are provisions for equipment such as structural mounts, electrical wiring, or air conditioning, they will be listed as separate line items.

(3) Whenever a Chart A inventory reveals equipment changes, subsystem modifications, or structural changes not already recorded in the Chart C, the change in weight and moment shall be posted as required in the preceding paragraphs. The newly calculated basic weight, moment and index shall be dated to agree with the inventory date enter on the Chart A.

(4) Whenever an aircraft is weighed, the Chart C will be updated to : reflect any changes resulting from the Chart A inventory and (2) show the new Basic Weight, Simplified Moment, and Index or CG from the Form B. The date entered on the Chart C shall agree with the inventory date entered on the Chart A and the weighing date entered on Form B.

d. Whenever the Chart C basic weight is changed by ±3/10 of 1% and/or basic CG is changed by ±0.3 inches, a new Form F which reflects this change, must be prepared. The requirement for originating new Form F's when aircraft equipment, which is part of the aircraft Basic Weight, is temporarily added to, removed from, or relocated within the aircraft because of maintenance, specific mission requirements, etc..., may be eliminated by making the following entries on the Aircraft Inspection and Maintenance Record (DA Form 2408-13-1).

(1) Status: Enter a red diagonal (/).

(2) Fault/Remarks: Enter a description of the aircraft equipment temporarily added, removed, or relocated. This entry shall conclude with the following statement: CHANGE NOT ENTERED ON CHART C.

(3) Continue to perpetuate the entry on DA Form 2408-13 or transfer to the Uncorrected Fault Record (DA Form 2408-14) in accordance with current technical manual procedures until the aircraft is returned to the previous configuration or the Chart C is updated to reflect the change.

(4) Temporary changes in basic weight may be reflected on DA Form 2408-13-1 or DA Form 2408-14 for a period not to exceed 90 days. If not accomplished sooner, the DD Form 365-3 will be updated to reflect the temporary change at the expiration of this 90 day period.

e. The temporary equipment changes listed on DA Form 2408-13-1 will be considered changes in aircraft loading. These changes will be accounted for on the Form F by entering the notation, "Equipment Changes" near the top of the corrections table. A brief description, weights, and moments of the equipment change will be entered in the columns below this notation. Aircraft equipment changes are treated the same as any other variation in loading. If there are enough completed Form F's in the aircraft weight and balance .le to verify that weight and cg will remain within limits for anticipated flight in the changes configuration, it is not necessary to prepare these forms for the specific configuration.

f. All weight and balance records will, as a minimum, be reviewed every 12 months.

(1) This review must include a Chart A inventory of the aircraft.

(2) Review of the DA Form 2408-5, DA Form 2408-5-1, and the Chart C for correctness in aircraft modification documentation.

(3) Review Chart C for accuracy.

(4) Review all associated Form F's for accuracy, to include accurate weights and arm locations of all expendable and non-expendable items.

(5) Upon satisfactory review of all weight and balance records, enter the following statement on the Chart C: "Annual review and inventory completed." The data and adjusted Basic Weight, Arm, Moment (if adjusted) will accompany this entry.

CHART C - BASIC WEIGHT AND BALANCE RECORD	FOR USE WITH T.O. 1-1B-40, NAVAIR 01-1B-40, AND TM-55-1500-342-23	Form Approved OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 10 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

MODEL/DESIGN/SERIES	SERIAL NUMBER	PAGE NUMBER

DATE (YYYYMMDD)	ITEM NUMBER		DESCRIPTION OF ARTICLE OR MODIFICATION	WEIGHT CHANGE						CURRENT TOTAL BASIC AIRCRAFT		
				ADDED (+)			REMOVED (-)					
	IN	OUT		WEIGHT	ARM	MOMENT/1	WEIGHT	ARM	MOMENT/1	WEIGHT	MOMENT/1	ARM (OR INDEX)/2

1/ Enter constant used below line 2/ Load adjuster index.

DD FORM 365-3, AUG 96 (EG) PREVIOUS EDITION MAY BE USED Designed using Perform Pro, WHS/DIOR, Aug 96

MS027839

Figure 4-4. DD Form 365-3 (Front) (Sheet 1 of 2)

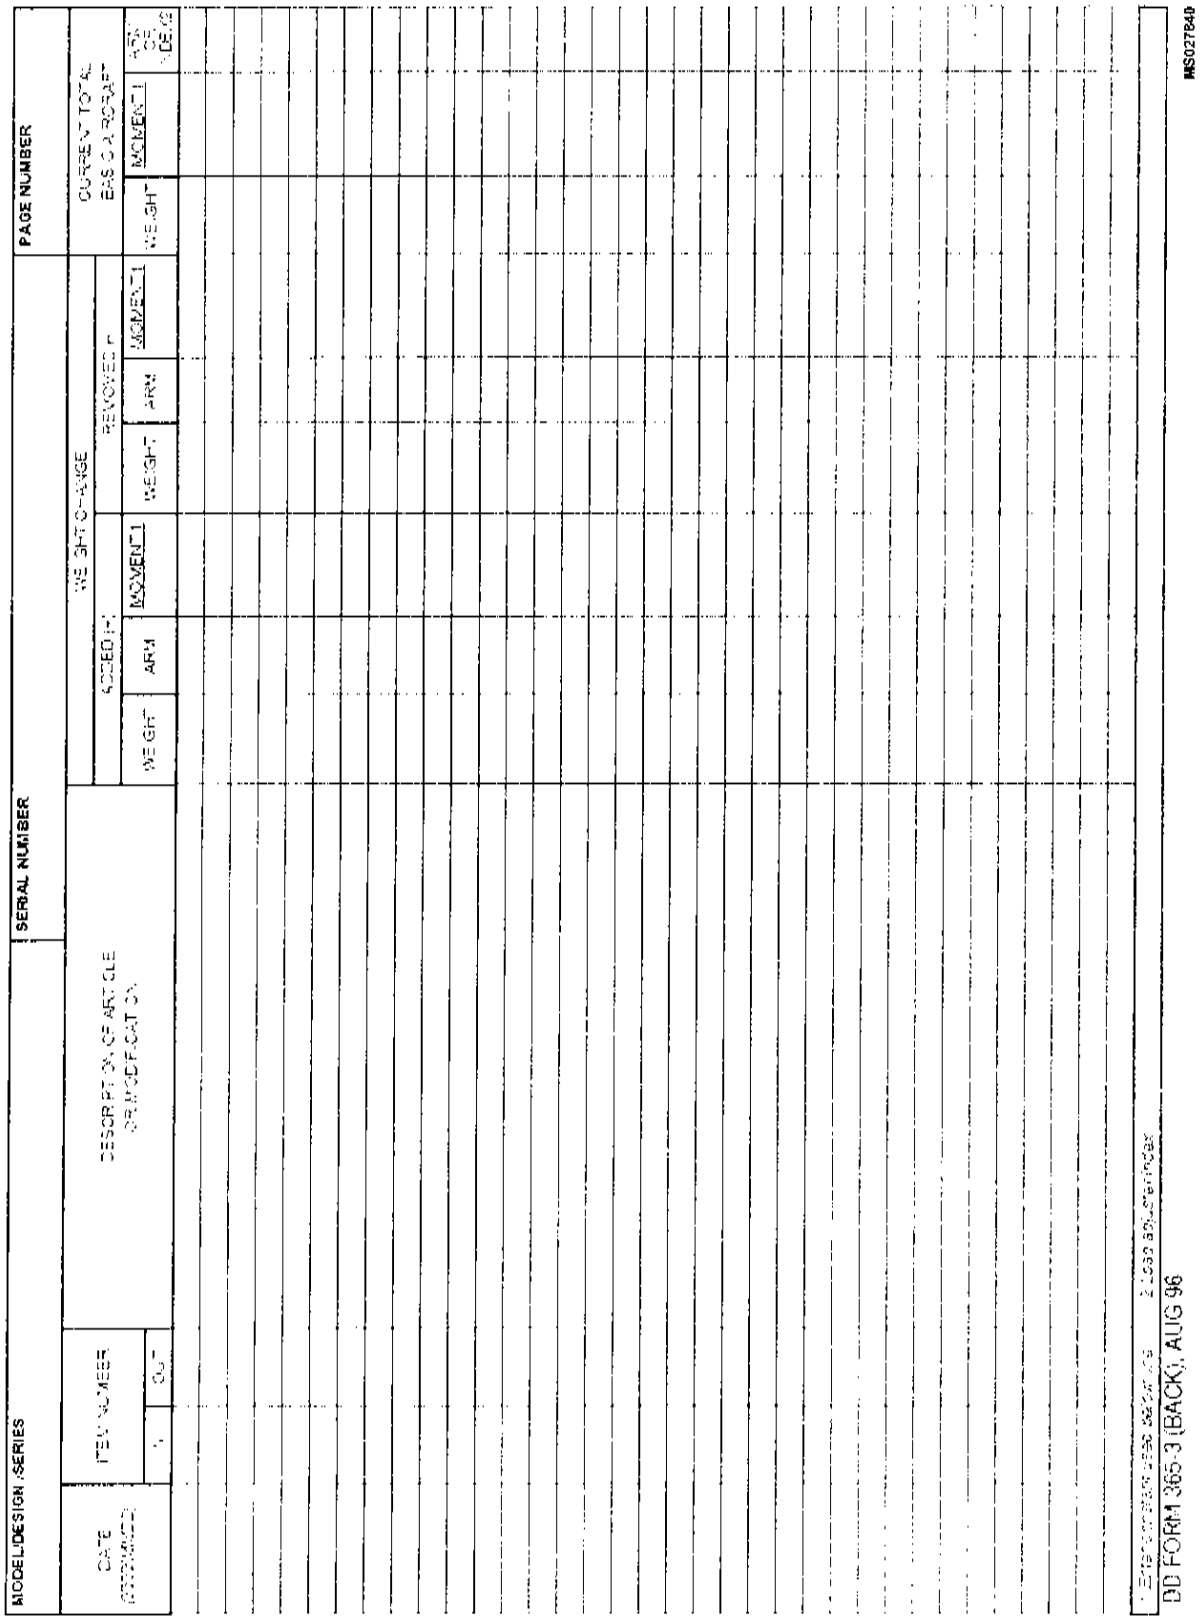


Figure 4-4. DD Form 365-3 (Reverse) (Sheet 2 of 2)

4-9. DD Form 365-4, WEIGHT AND BALANCE CLEARANCE FORM F.

a. This form (see Figure 4-6 and 4-8), is used to derive the gross weight and cg of an aircraft for flight. The Form F furnishes a record of the aircraft weight and balance status at each step of the loading process. It serves as a worksheet on which to record weight and balance calculations and any corrections that must be made to ensure that the aircraft will be within weight and CG limits. Sufficient completed FORMS F must be onboard the aircraft to verify that the weight and center-of-gravity will remain within allowable limits for the entire flight. Sufficient forms can be one (for the specific flight) or it can be several. Several Forms F for various loading of crew, passengers; stores, cargo, fuel sling loads, etc., which result in extreme forward/extreme aft CG locations and variations in gross weight, but which remain within allowable limits may be used to verify that a particular loading which is clearly between these extremes would remain within limits.

b. An Important Safety Consideration.

(1) Aircraft performance and handling characteristics are affected by the gross weight and center of gravity limits. An overloaded or improperly balanced aircraft will require more power and greater fuel consumption to maintain flight, and the stability and controllability will be seriously affected.

(2) The aircraft performance characteristics adversely affected by overweight are:

- Increased takeoff speed
- Increased takeoff runway length
- Reduced rate of climb
- Reduced maximum altitude capability
- Reduced operational range
- Reduced maneuverability
- Reduced controllability
- Increased stall speed
- Increased approach speed
- Increased landing distance

(3) A forward cg limit is specified to assure that sufficient elevator deflection is available at minimum speed. The aft cg limit is the most critical during flight maneuvers or operation of the aircraft. Aircraft stability decreases as the cg moves aft and the ability of the aircraft to right itself after maneuvering will be correspondingly decreased. The aircraft will be highly unstable in gusting or turbulent air, making attitude, and directional control extremely difficult. If a helicopter is loaded "out of cg limits," the pilot may find that when maximum collective cyclic control is applied, the helicopter's attitude will remain low in the direction cg limits are exceeded. The ability to level the aircraft, decelerate, and land safely may be lost.

NOTE

When aircraft are operated at critical gross weights and near the CG limits, the actual weight of each individual occupant, equipment, and all loaded items shall be used.

(4) The basic weight and moment obtained from the Chart C serve as the basis for the calculations on the Form F. Some minor exceptions to this rule are provided in AR 95-1 and AR 95-23. Small changes in Basic Weight and Moment due to removal or installation of aircraft equipment or other actions may be allowed to accumulate on the Chart C without changing the Forms F. A basic weight difference of ± 3/10 of 1 percent (example: 12,900 x 0.003) and/or CG difference of 0.3 inch at the basic weight are the maximum differences allowed by AR 95-1 and AR 95-23 when comparing the Form F and the last entry on the Chart C. Also, the Form F can be utilized to record certain items of aircraft equipment which is part of Aircraft Basic Weight when it is temporarily added to, removed from, or relocated within the aircraft because of maintenance, specific mission requirements, etc. Procedures for this situation are described in the Chart C discussion.

WARNING

Verify on-board flight performance system (e.g. Perf Page, FMS, CAAS) Basic Weight and Basic Moment/simplified matches Ref 1 of the record DD Form 365-4 , Weight and Balance Clearance Form F located in the aircraft logbook.

(5) Weights , Arms, and moments shall be listed to one decimal place. Moments should be simplified by a constant (100 or 1000).

c. There are two versions of the Form F: Transport and Tactical. They are designed for the respective loading arrangement of these two types of aircraft profiles. Aircraft designed to transport personnel will

use the Transport Form F; those aircraft not designed to transport personnel, will utilize the Tactical Form F regardless of the operating environment. Instructions for completing both versions are as follows:

(1) Transport.

NOTE

The following instructions are intended for calculating the longitudinal, lateral, and/or vertical axes if required. Separate Form F's shall be prepared for each of the required axes to be computed if using the manual paper method. When using AWBS, select AIRCRAFT DESCRIPTION and select the applicable Axis or Axes.

(a) Insert necessary identifying information at top of form.

(b) Reference 1. Enter aircraft basic weight and moment/constant (or index). Obtain this information from last entry on Chart C.

NOTE

If a load adjuster (see Figure 4-5) is used in loading the aircraft, enter opposite Reference 1 the index figure obtained from Chart C and use index figures throughout the form. Enter plate number of load adjuster (located on the left end of base) on the Form F. If the -10 operator's manual data (Chart E) is used instead of a load adjuster, enter moment/constant values throughout the form. Instructions for using a Load Adjuster, see the Navy's weight and balance control manual, NAVAIR 01-1B-50.



Figure 4-5. Load Adjuster

(c) Reference 2. Use as required.

(d) Reference 3. Enter number, weight and moment of flight crew (pilot, co-pilot, and observer). Use separate entries for each Arm location (i.e., Pilots, CE, Gunner, etc). Use Reference 2, 8, and 13 as needed.

(e) Reference 4. Enter weight and moment of crew's baggage.

(f) Reference 5. Enter weight and moment of steward's equipment, if applicable.

(g) Reference 6. Enter weight and moment of emergency equipment not included in basic weight.

(h) Enter weight and moment of any operating items not included in basic weight. Examples are chocks, fly-away gear, flight gear, cargo straps, servicing & cleaning supplies, etc.

(i) Reference 9. Enter sum of weights and moments for Reference 1 through Reference 8, inclusive, to obtain OPERATING WEIGHT.

(j) Reference 10. Enter the number of gallons, weight and moment of the fuel on board at takeoff. List under REMARKS the fuel tanks involved and the amount of fuel in each tank (as required).

(k) Reference 11. Enter the number of gallons, weight and moment of water injection fluid, if applicable.

(l) Reference 12. Enter sum of weights and moments for Reference 9 through Reference 11, inclusive, to obtain TOTAL AIRCRAFT WEIGHT.

(m) LIMITATIONS. The maximum ALLOWABLE LOAD is based on takeoff, landing, and limiting fuel restrictions determined from the -10 operator's manual or Chart E loading data. (In most helicopters, the takeoff and landing gross weight limitations are the same, and there is no "zero fuel" restriction). These values are computed in the LIMITATIONS table on the lower left-hand corner of the Form F as follows:

NOTE

Rotor-Wing Aircraft with Non-Retractable landing gear should use/verify the following limitations: Ramp Weight Limit, Takeoff Weight Limit, Landing Weigh Limit, Takeoff CG (Gear Down), and Landing CG (Gear Down). Fixed–wing and Rotor-wing aircraft with retractable landing gear should also use/verify Takeoff CG (Gear Up) and Landing CG (Gear Up). Other limits to include zero fuel may require computing IAW the individual operator's manual.

1 Enter the ALLOWABLE GROSS WEIGHT for TAKEOFF and LANDING. If the aircraft can have a gross weight restriction above which all weights must be fuel in the wings (zero wing fuel gross weight), enter the ALLOWABLE GROSS WEIGHT for LIMITING WING FUEL in the last column of the LIMITATIONS table.

2 If the aircraft's ALLOWABLE GROSS WEIGHT can be limited by a taxiing and/or ground handling gross weight, use the REMARKS section for subtracting the warm up and/or taxi fuel from the maximum permissible ground handling gross weight. The resulting value will be entered in the ALLOWABLE GROSS WEIGHT for TAKEOFF block of the LIMITATIONS table and a statement similar to the following will be noted in the REMARKS section: ALLOWABLE GROSS WEIGHT FOR TAKEOFF LIMITED BY MAXIMUM TAXI GROSS WEIGHT.

3 Determine the ALLOWABLE LOAD for TAKEOFF by subtracting the TOTAL AIRCRAFT WEIGHT (Reference 12) from the TAKEOFF ALLOWABLE GROSS WEIGHT. For most helicopters, this is the only ALLOWABLE LOAD calculation required. Determine the ALLOWABLE LOAD for LANDING by subtracting the OPERATING WEIGHT (Reference 9) plus ESTIMATED LANDING FUEL WEIGHT (Reference 23) from the LANDING ALLOWABLE GROSS WEIGHT. Determine the LIMITING WING FUEL ALLOWABLE LOAD by subtracting the OPERATING WEIGHT (Reference 9) from the LIMITING WING FUEL ALLOWABLE GROSS WEIGHT.

(n) Reference 13. Using same compartment letter designation as shown in Chart E (aircraft diagram) or on load adjuster, enter the number, weight, compartment, and total weight and total moment of passengers. Then enter weight, compartment, total weight, and total moment of cargo.

(o) Reference 14 is provided for aircraft requiring Zero Fuel Weight, Zero Fuel Weight Moment, and Zero Fuel CG computations. For helicopters these blocks are not used. The required values are determined as follows:

1 Add the weights and moments of OPERATING WEIGHT, (Reference 9) and DISTRIBUTION OF ALLOWABLE LOAD (PAYLOAD), (Reference 13). Enter the calculated total weight in the ZERO FUEL WEIGHT block. Enter the corresponding moment in the ZERO FUEL WEIGHT MOMENT BLOCK.

2 Compute Zero Fuel CG for that weight and enter in the ZERO FUEL % MAC block. (Cross out % MAC and enter value in IN.).

3 Enter on the LIMITATIONS table in the ALLOWABLE GROSS WEIGHT (FUEL) block any Zero Fuel or Limiting Wing Fuel limitation set forth in the -10 operator's manual or Chart E loading data. This .gure must be compared with the calculated value in the ZERO FUEL WEIGHT block. If the calculated weight exceeds the limits adjust the load accordingly.

4 The Zero Fuel CG cannot exceed the forward and aft cg limits at the Zero Fuel Weight. These may be found in the -10 operator's manual or Chart E loading data. If it is within limits, enter the PERMISSIBLE CG ZERO FUEL WEIGHT forward and aft limits at the Zero Fuel Weight in the LIMITATIONS table. If it is not, adjust the load accordingly, and repeat the process.

5 Enter the Zero Fuel weight and moment in Reference 21.

(p) Reference 16. Enter sum of Reference 12 and the compartment totals under Reference 13 opposite TAKEOFF CONDITION (Uncorrected).

(q) Reference 17. Enter the TAKEOFF CG IN % MAC or IN as determined from weight and moment values of Reference 16.

(r) The weight value from Reference 16 must be compared with the allowable GROSS WEIGHT TAKEOFF as shown in the LIMITATIONS table to ensure it is within limits. Use the Reference 17 TAKEOFF CG IN % MAC or IN to determine the PERMISSIBLE CG TAKEOFF forward and aft cg limits from the -10 operator's manual or Chart E loading data. If the takeoff cg of Reference 17 is within these PERMISSIBLE CG TAKEOFF limits, and no other corrections are necessary, (i.e. temporary equipment changes), enter the permissible limits in the space provided in the limitations table. Enter the uncorrected weight and cg values from Reference 16 and Reference 17 into the blocks at Reference 19 and Reference 20 respectively.

(s) Reference 18. When the takeoff weight of Reference 16 and/or the takeoff cg of Reference 17 are not within permissible takeoff weight and/or cg limits, changes in the amount or DISTRIBUTION OF ALLOWABLE LOAD (PAYLOAD) (Reference 13) are required. The necessary load adjustments must be noted in the Corrections columns on the left-hand portion of the Form F. Enter a brief description of the necessary load adjustment in the left-hand column with the weight and moment listed in the columns provided. Sum all the weight and moment increases and/or decreases to obtain the net change (+ or -) in the amount or distribution of the load. Transfer the total weight and moment adjustment to the spaces provided for Corrections (if required) at References 18.

NOTE

If there are any temporary equipment changes listed on DA Form 2408-13-1 or DA Form 2408-14 they shall be considered changes in aircraft loading. These changes shall be entered with the notation "Equipment Changes" near the top of the Corrections table. A brief description, weight and moments shall be entered in the columns below this notation. These entries shall be treated as a variation in loading and applied to the total entered in Reference 18.

(t) Reference 19. In the space provided for TAKEOFF CONDITION (corrected), enter the sum of Reference 16 and Reference 18. (Add if Reference 18 is positive. If it is negative, subtract Reference 18 from Reference 16).

(u) Reference 20. Enter the TAKEOFF CG (Corrected), as determined from the weight and moment values of Reference 19.

(v) The weight value from Reference 19 must again be compared with the allowable GROSS WEIGHT TAKEOFF as shown in the LIMITATIONS table to ensure compatibility. At the Reference 19 TAKEOFF CONDITION (Corrected) gross weight, again determine the PERMISSIBLE CG TAKEOFF forward and aft cg limits from the -10 operator's manual or Chart E loading data. Re-check the Takeoff CG. of Reference 20 to ensure it is within the PERMISSIBLE CG TAKEOFF limits. Enter these limits in the space provided in the LIMITATIONS table.

(w) Reference 21. Enter Zero Fuel Weight and moment. This is normally calculated by subtracting TAKEOFF FUEL (Reference 10) from corrected TAKEOFF CONDITION (Reference 19). If Zero Fuel weight limitations apply, this figure will match the values Reference 14.

(x) Reference 22. Enter weight and moment of any aerial supply load(s) to be dropped before landing.

(y) Reference 23. Determine the ESTIMATED LANDING FUEL weight and moment and enter it in the space provided.

(z) Reference 24. Determine the ESTIMATED LANDING CONDITION by subtracting the weights and moments of Reference 22 from Reference 21 and adding Reference 23.

(aa) Reference 25. Enter the ESTIMATED LANDING CG as determined from the weight and simplified moment values of Reference 24.

(ab) The weight value from Reference 24 must be compared with the allowable GROSS WEIGHT LANDING as shown in the LIMITATIONS table to ensure compatibility. Use the Reference 24 ESTIMATED LANDING CONDITION gross weight to determine the PERMISSIBLE CG LANDING forward and aft cg limits from the -10 operator's manual or Chart E loading data. If the ESTIMATED LANDING CG is within the landing cg limits, enter the forward and aft cg limits in the PERMISSIBLE CG LANDING blocks of the LIMITATIONS table CG.

(ac) When the ESTIMATED LANDING CONDITION of Reference 24 and/or the ESTIMATED LANDING CG of Reference 25 are not within permissible landing weight and/or cg limits, changes in the amount or distribution of load and/or fuel are required. A new Form F will be completed.

(ad) Most FWD and Most AFT calculations are not utilized for Army aircraft. Multiple Form F's are required to verify the aircraft remains within limits throughout the entire flight.

(ae) REMARKS BLOCK: Enter pertinent information regarding mission loading, takeoff, and/or landing conditions, as required. Enter any significant information that needs to be conveyed to the aircraft operators.

(af) Enter signature or Technical Inspector stamp of the person computing this form in the COMPUTED BY SIGNATURE block.

(ag) WEIGHT AND BALANCE AUTHORITY SIGNATURE block. Enter signature or Technical Inspector stamp of the person assigned to aircraft IAW DD Form 365.

NOTE

Local Commander may establish policies and procedures allowing deviation from the WEIGHT AND BALANCE AUTHORITY SIGNATURE instructions above.

WEIGHT AND BALANCE CLEARANCE FORM F - TRANSPORT
(Use reverse for tactical missions)

FOR USE WITH T.O. 1-1B-40, NAVAIR 01-1B-40, AND TM-55-1500-342-23

Form Approved OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 10 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS

DATE *(YYYYMMDD)*	AIRCRAFT TYPE	FROM	HOME STATION
MISSION	SERIAL NO	TO	PILOT

REMARKS

REF	ITEM	WEIGHT	INDEX OR MOM/
1	BASIC AIRCRAFT *(From Chart C)*		
2			
3	CREW *(No.)*		
4	CREW'S BAGGAGE		
5	STEWARD'S EQUIPMENT		
6	EMERGENCY EQUIPMENT		
7	EXTRA EQUIPMENT		
8			
9	OPERATING WEIGHT		
10	TAKEOFF FUEL (Gal.)		
11	WATER INJ		
12	TOTAL AIRCRAFT WEIGHT		

LOAD ADJUSTER NUMBER

CORRECTION/MOST FWD/MOST AFT

13 DISTRIBUTION OF ALLOWABLE LOAD *(PAYLOAD)*

14 ZERO FUEL WT

ZERO FUEL WT INDEX OR MOM

ZERO FUEL % M.A.C

COMPT OR ARM	ITEM	CHANGES (+ or -) WEIGHT	CHANGES (+ or -) INDEX OR MOM/	PASSENGERS NO	PASSENGERS WEIGHT	COMPT OR ARM	CARGO	CARGO	COMPT OR ARM
TOTAL WEIGHT REMOVED									
TOTAL WEIGHT ADDED									
NET DIFFERENCE									

LIMITATIONS

CONDITION	TAKEOFF	LANDING	1 FUEL
ALLOWABLE GROSS WEIGHT			
TOTAL AIRCRAFT WT (Ref. 12)			
(Ref. 9) + (Ref. 23)			
OPERATING WT. *(Ref. 9)*			
ALLOWABLE LOAD *(Ref. 13) (use smallest figure)*			

1 Zero Fuel or Limiting Wing Fuel

PERMISSIBLE C G TAKEOFF	FORWARD	AFT
PERMISSIBLE C G LANDING	FORWARD	AFT
PERMISSIBLE C G ZERO FUEL WT	FORWARD	AFT

COMPUTED BY SIGNATURE

WEIGHT AND BALANCE AUTHORITY SIGNATURE

PILOT SIGNATURE

REF	ITEM
15	
16	TAKEOFF CONDITION *(Uncorrected)*
17	TAKEOFF C.G. IN % M.A.C. OR IN
18	CORRECTIONS *(If required)*
19	TAKEOFF CONDITION *(Corrected)*
20	TAKEOFF C.G. IN % M.A.C. OR IN
21	ZERO FUEL WT *(Ref. 14)*
22	LESS AIR DROP LOAD
23	ESTIMATED LANDING FUEL
24	ESTIMATED LANDING CONDITION
25	ESTIMATED LANDING C.G. IN % M.A.C. OR IN

DD FORM 365-4, AUG 96 (EG) PREVIOUS EDITION MAY BE USED. MS027841

Figure 4-6. DD Form 365-4 (Front)

(2) Tactical.

NOTE

The following instructions are intended for calculating the longitudinal, lateral, and/or vertical axes if required. Separate Form F's shall be prepared for each of the required axes to be computed if using the manual paper method. When using AWBS, select AIRCRAFT DESCRIPTION and select the applicable Axis or Axes.

(a) Insert necessary identifying information at top of form.

(b) Reference 1. Enter aircraft basic weight and moment/constant (or index). Obtain this information from last entry on Chart C.

NOTE

If a load adjuster (see Figure 4-7) is used in loading the aircraft, enter opposite Reference 1 the index figure obtained from Chart C and use index figures throughout the form. Enter plate number of load adjuster (located on the left end of base) on the Form F. If the -10 operator's manual data (Chart E data) is used instead of a load adjuster, enter moment/constant values throughout the form. Instructions for using a Load Adjuster, see the Navy's weight and balance control manual, NAVAIR 01-1B-50.



MS031064

Figure 4-7. Load Adjuster

(c) Reference 2. Use as required.

(d) Reference 3. This section takes into account all nonexpendable items not in the basic weight (and not otherwise accounted for). Using the same compartment letter designation as shown in the operators manual (Chart E) or on load adjuster, enter operating item description, weight, and moment for crew, flight gear, baggage, cargo, emergency equipment, racks, chocks, fly-away gear, servicing & cleaning supplies, etc.

(e) Reference 4. Enter sum of weights and moments for Reference 1 through Reference 3 to obtain OPERATING WEIGHT.

(f) Reference 5. Enter by compartment the item description (type, number of rounds), weight and moment of all ammunition.

(g) Reference 6. Enter item description, weight and moment of all other expandable ordnance such as bombs and rockets.

(h) Reference 7. Enter number of gallons, weight and moment of fuel. If auxiliary fuel is carried, make appropriate entries in space provided.

(i) Reference 8. Enter item description weight and moment of miscellaneous variables (such as water injection fluid).

(j) Reference 9. Enter sum of weights and moments for Reference 4 through Reference 9 opposite TAKEOFF CONDITION (Uncorrected).

NOTE

Rotor-Wing Aircraft with non-retractable landing gear should use/verify the following limitations: Ramp Weight Limit, Takeoff Weight Limit, Landing Weight Limit, Takeoff CG (Gear Down), and Landing CG (Gear Down). Fixed-Winged and Rotor-Wing Aircraft with retractable landing gear should also use/verify Takeoff CG (Gear Up) and Landing CG (Gear Up). Other limits to include zero fuel may require computing IAW the Individual Operator's Manual.

(k) Reference 10. Enter TAKEOFF CG (Uncorrected) as determined from weight and moment values of Reference 9.

(l) Enter the allowable GROSS WEIGHT TAKEOFF and GROSS WEIGHT LANDING in the LIMITATIONS table at the lower left-hand corner of the Form F. This data is found in the -10 operator's manual (Chart E). Loading data.

(m) The weight value from Reference 9 must be compared with the allowable GROSS WEIGHT TAKEOFF as shown in the LIMITATIONS table to ensure it is within limits. Use the Reference 9 TAKEOFF CONDITION (Uncorrected) gross weight to determine the PERMISSIBLE CG TAKEOFF forward and aft cg limits from the -10 operator's manual or Chart E loading data. If the takeoff cg of Reference 10 is within these PERMISSIBLE CG TAKEOFF limits, and no other corrections are necessary, (i.e. temporary equipment changes), enter the permissible limits in the space provided in the limitations table. Enter the uncorrected weight and cg values from Reference 9 and Reference 10 into the blocks at Reference 12 and Reference 13 respectively.

(n) Reference 11. When the takeoff weight of Reference 9 and/or the takeoff cg of Reference 10 are not within permissible takeoff weight and/or cg Limits, changes in the amount or distribution of load (Reference 3 through Reference 8) are required. The necessary load adjustments must be noted in the CORRECTIONS columns on the left-hand portion of the Form F. Enter a brief description of the necessary load adjustment in the left-hand column with the weight and moment listed in the columns provided. Sum all the weight and moment increases and/or decreases to obtain the net change (+ or-) in the amount or distribution of the load. Transfer the total weight and moment adjustment to the spaces provided for CORRECTIONS (If required) at Reference 11.

NOTE

If there are any temporary equipment changes listed on DA Form 2408-13-1 or DA Form 2408-14, they shall be considered changes in aircraft loading. These changes shall be entered with the notation "EQUIPMENT CHANGES" near the top of the CORRECTIONS table. A brief description, weights and moments shall be entered in the columns below this notation. These entries shall be treated as a variation in loading and applied to the total entered in Reference 11.

(o) Reference 12. In the space provided for TAKEOFF CONDITION (corrected), enter the sum of Reference 9 and Reference 11. (Add if Reference 11 is positive. If it is negative, subtract Reference 11 from Reference 9).

(p) Reference 13. Enter the TAKEOFF CG (Corrected), as determined from the weight and moment values of Reference 12.

(q) The weight value from Reference 12 must again be compared with the allowable GROSS WEIGHT TAKEOFF as shown in the LIMITATIONS table to ensure compatibility. At the Reference 12 TAKEOFF CONDITION (Corrected) gross weight, again determine the PERMISSIBLE CG TAKEOFF forward and aft cg limits from the -10 operator's manual or Chart E loading data. Recheck the takeoff cg of Reference 13 to ensure it is within the PERMISSIBLE CG TAKEOFF limits. Enter these limits in the space provided in the LIMITATIONS table.

(r) Reference 14. Determine total TAKEOFF FUEL weight and moment from Reference 7 and enter in Reference 14. List weight and moment of expendable items such as ammunition (not including the weight of cases and links if retained), bombs, rockets, and external fuel tanks that are intended to be dropped during .ight. Explain under REMARKS, if necessary. These items listed as LESS EXPENDABLES are considered part of Reference 14.

(s) Reference 15. Determine the ESTIMATED LANDING FUEL weight and moment and enter it in the space provided.

(t) Reference 16. Determine the ESTIMATED LANDING CONDITION by subtracting all of the expendable weights and moments of Reference 14 from the Reference 12 weight and moment and adding the weight and moment of Reference 15. The use of a minus sign (-) before the Reference 14 entries and a plus sign (+) before the Reference 15 entry helps prevent errors in completing this step.

(u) Reference 17. Enter the ESTIMATED LANDING CG as determined from the weight and simplified moment values of Reference 16.

(v) The weight value from Reference 16 must be compared with the allowable GROSS WEIGHT LANDING as shown in the LIMITATIONS table to ensure compatibility. Use the Reference 16 ESTIMATED LANDING CONDITION gross weight to determine the PERMISSIBLE CG LANDING forward and aft cg limits from the -10 operator's manual or Chart E loading data. If the ESTIMATED LANDING CG of the Reference 17 is within these PERMISSIBLE CG landing limits, enter them in the spaces provided in the LIMITATIONS table.

(w) When the ESTIMATED LANDING CONDITION or the Reference 16 and/or the ESTIMATED LANDING CG of Reference 17 are not within permissible landing weight and/or cg limits, changes in the amount or distribution of load and/or fuel are required. A new Form F will be completed.

(x) Most FWD and Most AFT calculations are not utilized for Army aircraft. Multiple Form F's are required to verify the aircraft remains within limits throughout the entire flight.

(y) REMARKS BLOCK: Enter pertinent information regarding mission loading, takeoff, and/or landing conditions, as required. Enter any significant information that needs to be conveyed to the aircraft operators.

(z) Enter signature or Technical Inspector stamp of the person computing this form in the COMPUTED BY SIGNATURE block.

(aa) WEIGHT AND BALANCE AUTHORITY SIGNATURE Block. Enter signature or Technical Inspector stamp of the person assigned to aircraft IAW DD Form 365.

NOTE

Local Commander may establish policies and procedures allowing deviation from the WEIGHT AND BALANCE AUTHORITY SIGNATURE instructions above.

WEIGHT AND BALANCE CLEARANCE FORM F - TACTICAL
(Use reverse for transport missions)

FOR OFFICIAL USE ONLY (FOUO) WHEN FILLED IN
DA FORM 365-4, TM 55-1500-342-23

DATE (YYYYMMDD)	AIRCRAFT TYPE	FROM	HOME STATION
MISSION	SERIAL NO.	TO	PILOT

CORRECTION/MOST FWD/MOST AFT (Ref. 11)				REF	ITEM	WEIGHT	INDEX OR MOM/
		CHANGES (+ or -)		1	BASIC AIRCRAFT (From Chart C)		
COMPT	ITEM	WEIGHT	INDEX OR MOM/	2			
				3	COMPT / CREW NO. / CREW WEIGHT / CARGO/MISC — DISTRIBUTION OF LOAD		
				4	OPERATING WEIGHT		
				5	SAMMO		
				6	BOMBS, MISSILES, ETC		
				7	FUEL		
TOTAL WEIGHT ADDED				8	MISC. VARIABLES		
TOTAL WEIGHT REMOVED				9	TAKEOFF CONDITION (Uncorrected)		
NET DIFFERENCE (Ref. 11)				10	TAKEOFF C.G. IN % M.A.C. OR IN		
REMARKS				11	CORRECTIONS (If required)		
				12	TAKEOFF CONDITION (Corrected)		
				13	TAKEOFF C.G. IN % M.A.C. OR IN		
				14	TAKEOFF FUEL		
				LESS	EXPENDABLES		
				15	ESTIMATED LANDING FUEL		
				16	ESTIMATED LANDING CONDITION		
				17	ESTIMATED LANDING C.G. IN % M.A.C. OR IN		

LIMITATIONS		
GROSS WEIGHT TAKEOFF (lb.)	GROSS WEIGHT LANDING (lb.)	
PERMISSIBLE C.G. TAKEOFF (% M.A.C. or in.)	FORWARD	AFT
PERMISSIBLE C.G. LANDING (% M.A.C. or in.)	FORWARD	AFT
COMPUTED BY SIGNATURE		
WEIGHT AND BALANCE AUTHORITY SIGNATURE		
PILOT SIGNATURE		

DD FORM 365-4 (BACK), AUG 96

MS027842

Figure 4-8. DD Form 365-4 (Reverse)

4-10. SAMPLE AIRCRAFT MWO FORMAT. The following example serves as a general guideline for documenting aircraft modifications with regards to permanently installed/removed items and those items that have provisions to be installed/removed.

a. Accuracy of actual item's weight and location is critical in maintaining safe, reliable aircraft operations. Increased airframe and component stress, handling quality degradation, and aircraft accidents are likely consequences of poor weight and balance maintenance.

b. Items should be listed on the Chart A only if they weigh 1.0 pound or more for aircraft under 5,000 pounds weight empty (OH-58's), 2.0 pounds or more for aircraft between 5,000 and 50,000 pounds weight empty, and 5.0 pounds or more for aircraft greater than 50,000 pounds. Weights are listed to the tenth of one pound.

(1) Items should be weighed to capture the actual weight. Avionics and composite items often have variations in actual weight. By conducting a sample weighing of many items, a more accurate weight is obtained.

(2) Exceptions to the pound rule are applicable for inventory control, continuity of compartment items, etc. Example would be aircraft First Aid Kits which normally weigh less than 2 pounds.

c. The Arm (Fuselage Station) is measured to the tenth of an inch (rounded to nearest 10th). Calculate the cg of each item listed on the Chart A and C using engineering drawings and confirm by actual measurements with regards to location.

d. To consolidate multiple items into one assembly, the average Arm must be calculated using each item's Arm and Moment (not simplified). Average Arm is calculated by dividing the total Moment (not simplified) by the total weight (see Figure 4-9).

Item	Weight (lbs)	Arm (in)	Moment (in-lbs)
Wire Harness	4.3	321.1	1380.7
Wire Connectors	1.9	319.2	606.4
Mounting Hardware	2.6	323.6	841.3

a) Sum the weight of all the items: 4.3 + 1.9 + 2.6 = 8.8 lbs.
b)Sum the moments of all the items: 1381 + 6056 + 841 = 2828.4 in-lbs.
c) To calculate the arm of the combined assembly, divide the total moment by the total weight: 2828.4/8.8 = 321.4 in.
d) Final Entry:

Item	Weight (lbs)	Arm (in)	Moment (in-lbs)
Wire Harness with Mounting Hardware	8.8	321.4	2828.4

Figure 4-9. Average Arm Example

e. Moment is calculated to the tenth (rounded to the nearest 10th).

f. Make sure that all items listed from Chart A are also listed on Chart C.

g. The Moment simplifier is MDS dependant (MOM/100 or 1000) IAW applicable technical manuals.

h. References: See Appendix A, SAWE Recommended Practice 7, and AR 95-1.

NOTE

The items listed are for example purposes only.

i. Start of Example for MWO's, A-MWO's, Etc...

(1) Make entries on DD Form 365-1 (Chart A) and DD Form 365-3 (Chart C), in accordance with TM 55-1500-342-23 as indicated below:

(a) Chart A. Items that are removed, when using AWBS, unselect "In A/C" and follow the software instructions.

Item No.	Item	Weight	Arm	MOM/1000
B-XXX	CHAFF/FLARE DISPENSER CONTROL PANEL, P/N 9272533	2.1	240.3	0.5

(b) Chart A. Items that are installed, when using AWBS, make entries in the appropriate compartments as shown below. Enter new item numbers as required. Select "IN A/C" only after item(s) is actually installed.

Item No.	Item	Weight	Arm	Mom/1000
F-XXX	SEQUENCER, #1 SA-2669/ALE-47(V), P/N A100685	4.3	515.2	2.2

(c) Chart C. Make entries for items removed/added as shown below. When using AWBS, Chart A items should automatically be removed/added to the Chart C. Ensure a Header that reflects the beginnings of the MWO and a second Header reflecting the end of the MWO.

NOTE

When using AWBS version 9.2 or later Aircraft Modification Wizard, do not enter the Header as this is auto-generated by the software.

Item No.	In/Out	Item	Weight	Arm	Mom/1000
B-XXX	OUT	CHAFF/FLARE DISPENSER CONTROL PANEL, P/N 9272533	2.1	240.3	0.5
	OUT	M-130 SYSTEM WIRING, P/N 3954-228	1.6	380.1	0.6
F-XXX	IN	SEQUENCER, #1 SA-2669/ALE-47(V), P/N A100685	4.3	515.2	2.2
	IN	CMWS WIRING HARNESS W/HARDWARE, P/N 274-005	12.4	258.4	3.2

NOTE

The next paragraph is applicable only for aircraft modifications that contain Form F items.

(d) DD Form 365-4, Weight and Balance Clearance Form F (Form F). Make entries for items added as required on Form F. Changes to the appropriate technical manual must also be made to list these new Form F items.

Item	Weight	Arm	Mom/1000
GAU-19 MACHINE GUN	143.0	102.6	14.6
GAU-19 GUN MOUNT	26.0	102.6	2.6
GAU-19 W3 GUN CABLE	4.0	102.6	0.4

END OF EXAMPLE

(2) If items are installed prior to flight and then removed afterwards or numerous configurations are used, the items should only be listed on the DD Form 365-4, Weight and Balance Clearance Form F.

4-11. CHART E. LOADING DATA AND SPECIAL WEIGHING INSTRUCTIONS. The original Chart E placed in the weight and balance file will be retained in the file until a revised Chart E is present in the aircraft maintenance manual(s). Following publication of the Chart E in the maintenance manual, the Chart E in the aircraft file will no longer be required and will be destroyed locally.

4-12. AUTOMATED WEIGHT AND BALANCE SYSTEM (AWBS). The purpose of this section is to provide information and instructions regarding the use of the Automated Weight and Balance System.

a. Introduction. The Automated Weight and Balance System (AWBS) is a computer program used to maintain weight and balance records for both fixed and rotary wing aircraft.

(1) Aircraft weight and balance data is stored on magnetic media and may be updated via the computer thus achieving two main objectives: reducing mathematical errors and increasing efficiency.

(2) The system is designed to support all U.S. military services and government agencies. AWBS versions 9.2 and higher are the only versions approved for Army use. The printouts of the program are authorized in lieu of the DD Form 365 Record of Weight and Balance Personnel, DD Form 365-1 Chart A - Basic Weight Checklist Record, DD Form 365-2 Form B - Aircraft Weighing Record, DD Form 365-3 Chart C - Basic Weight and Balance Record, and the DD Form 365-4 Weight and Balance Clearance Form F.

(3) Electronic signatures are authorized in lieu of normal pen or stamp signatures.

(4) The Scheduler provides an automated scheduling/tracking utility, which automatically updates and tracks the current Basic Weight, Basic Arm, Basic Moment, Percent of MAC, and accomplished inspection dates for each assigned aircraft. The Scheduler automatically updates the scheduling information when a task has been completed.

NOTE

The Scheduler, if used, shall be maintained with current information as required by Army policies and procedures.

b. The following is a general guide for the AWBS. A more detailed explanation can be found in the AWBS and Form F Users Manual. These manuals can be obtained from the Army's Aeromechanics website at https://www.jtdi.mil. Once the AWBS program is installed (default path), the AWBS and Form F Users Manual can be located at the following computer file location: C:\Program Files\Weight and Balance\AWBS.

c. Basic Concepts. AWBS functions almost identically to the manual method of performing aircraft weight and balance.

(1) The printed forms it produces were designed to be as similar as possible to their DD Form 365 series counterparts without compromising the benefits of being automated. They are designed to be printed on regular 8½" x 11" bond paper and to replace the usage of DD Form 365, DD Form 365-1, DD Form 365-2, DD Form 365-3 and DD Form 365-4.

(2) AWBS is comprised of two modules. The core AWBS program which handles the Chart A, Form B, Chart C, and the Form F Generator, which handles the Transport and Tactical version of the Form F. Aircraft specific Subsystems of AWBS, called Automated Form F (AFF), are used to automate the generation of the DD Form 365-4, Weight and Balance Clearance Form F

(3) AWBS is serial number driven. This means that at any time during AWBS usage, the software will only concern itself with the aircraft that it is currently working.

(4) AWBS shall not completely replace the Weight and Balance Handbook, nor will it replace the user's knowledge of performing aircraft weight and balance. It is simply a tool to perform weight and balance tasks more efficiently and accurately. When AWBS is used correctly, mathematical errors are reduced and efficiency is increased.

NOTE

Use of AWBS does not relieve the Weight and Balance Technician of responsibility for determining safe weight and balance conditions.

d. Distribution of AWBS. The current version of the Automated Weight and Balance System (AWBS) may be obtained via download through the Aeromechanics' website http://www.jtdi.mil or mail via the following address:

CDR, USARDECOM
ATTN: AMSRD-AMR-AE-A (Mass Properties)
(Mass Properties) Building 4488
Redstone Arsenal, AL 35898-5000

CHART - E
SHEET 1 of 33
MODEL - UH-60A
CHART DATE - 2 Dec. 1982

SAMPLE

12/2/82

SPECIAL WEIGHING INSTRUCTIONS

AIRCRAFT CONDITION

The Basic Weight condition is established with:

- Pilots access doors closed
- Cargo doors closed
- Gunners' windows closed
- All main rotor pylon panels closed
- Engine cowl closed
- Nose compartment door closed
- Main and tail rotor blades in flight position and equally spaced
- Vertical tail in flight position
- Horizontal tails in flight position (level)
- Unusable & trapped fuel and oil
- Usable engine oil

If the aircraft is weighed with dry fuel and oil systems, usable oil and unusable and trapped fuel and oil as listed in Chart A shall be added to the "As Weighed" condition.

Figure 4-10. Chart E

CHART - E
SHEET 2 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

11/14/80

SAMPLE

FUEL DRAINING

I. Suction Equipment Method

Defueling is accomplished as follows:

A. If required, prime fuel system including APU line to insure that fuel lines contain fuel.

B. Attach suction hose to the pressure fuel adapter located on the right side of the aircraft at Sta. 431.

C. Defuel with power equipment. Suction equipment will remove all but a small amount of residual fuel.

D. Drain residual fuel from each cell in the following manner:

(1) Turn all electrical power off.

(2) Open the sump drain valves at the lower fuselage at Sta. 421 and WL 203 and drain residual fuel.

Fuel remaining aboard after these defuel procedures is trapped fuel and is included in the aircraft basic weight (See Chart A).

II. Sump Drain Method

A. Fuel can also be drained through the sump drain valves at Sta. 421 and WL 203 by attaching a 1.25 in. diameter hose to the sump drain valve probe (SS No. 70307-03018-102). Open drain valve and direct fuel into a suitable container.

OIL DRAINING

Engine oil is part of Basic Weight on the UH-60A. Consequently, the aircraft should be weighed with full engine oil. However, if it is desired to drain the oil, provisions have been made for draining while the engine is in a horizontal position, 15 degrees nose up, and 20 degrees nose down. The integral oil tank drain plug is located on the forward lower side of the tank.

(Sheet 1 of 32)

CHART - E
SHEET 3 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

11/14/80

LEVELING DEVICE

The plumb bob suspension point is located just inside the left hand cargo door at Sta. 309.62, WL 258.5, at BL 35.0. The plumb bob target (leveling plate) is located on the cabin floor WL 206.815 directly below the suspension point (See Sheet 5 of 33 for illustration).

FORWARD REACTION LOCATION (Electronic Weighing Kit)

The forward jack points are located under the forward fuselage at Sta.247.0 and BL 43.7 (right and left hand). Place the weighing cells on the jacks and place under the forward jack points. Extend jack (simultaneously with aft jack) until plumb bob reaches the level datum on the target.

AFT REACTION LOCATION (Electronic Weighing Kit)

The aft jack point is located under the aft fuselage at Sta. 605.3 and BL 0.0. Proceed in the same manner as with the forward reactions.

AIRCRAFT LEVELING (Electronic Weighing Kit)

Raise the helicopter to the level position by extending all jacks simultaneously until all tires are clear of the ground. Adjust jacks as necessary to attain a level attitude in fore and aft and lateral directions.

After weighing, lower jacks simultaneously until all tires contact the ground in the static position.


ALTERNATE WEIGHING (Wheel Weighing on Mechanical Scales)

When weighing on wheels, measure dimension B and D during weighing and after leveling. Using these actual dimensions, and the forward jack point dimension I (Sta. 247.0), determine dimension E and F. For checking purposes, approximate dimensions for E and F are given below:


Dimension E - Reference Datum to Center Line of Main Wheels 297.4 inches
Dimension F - Reference Datum to Center Line of Tail Wheel 644.6 inches

SAMPLE

(Sheet 2 of 32)

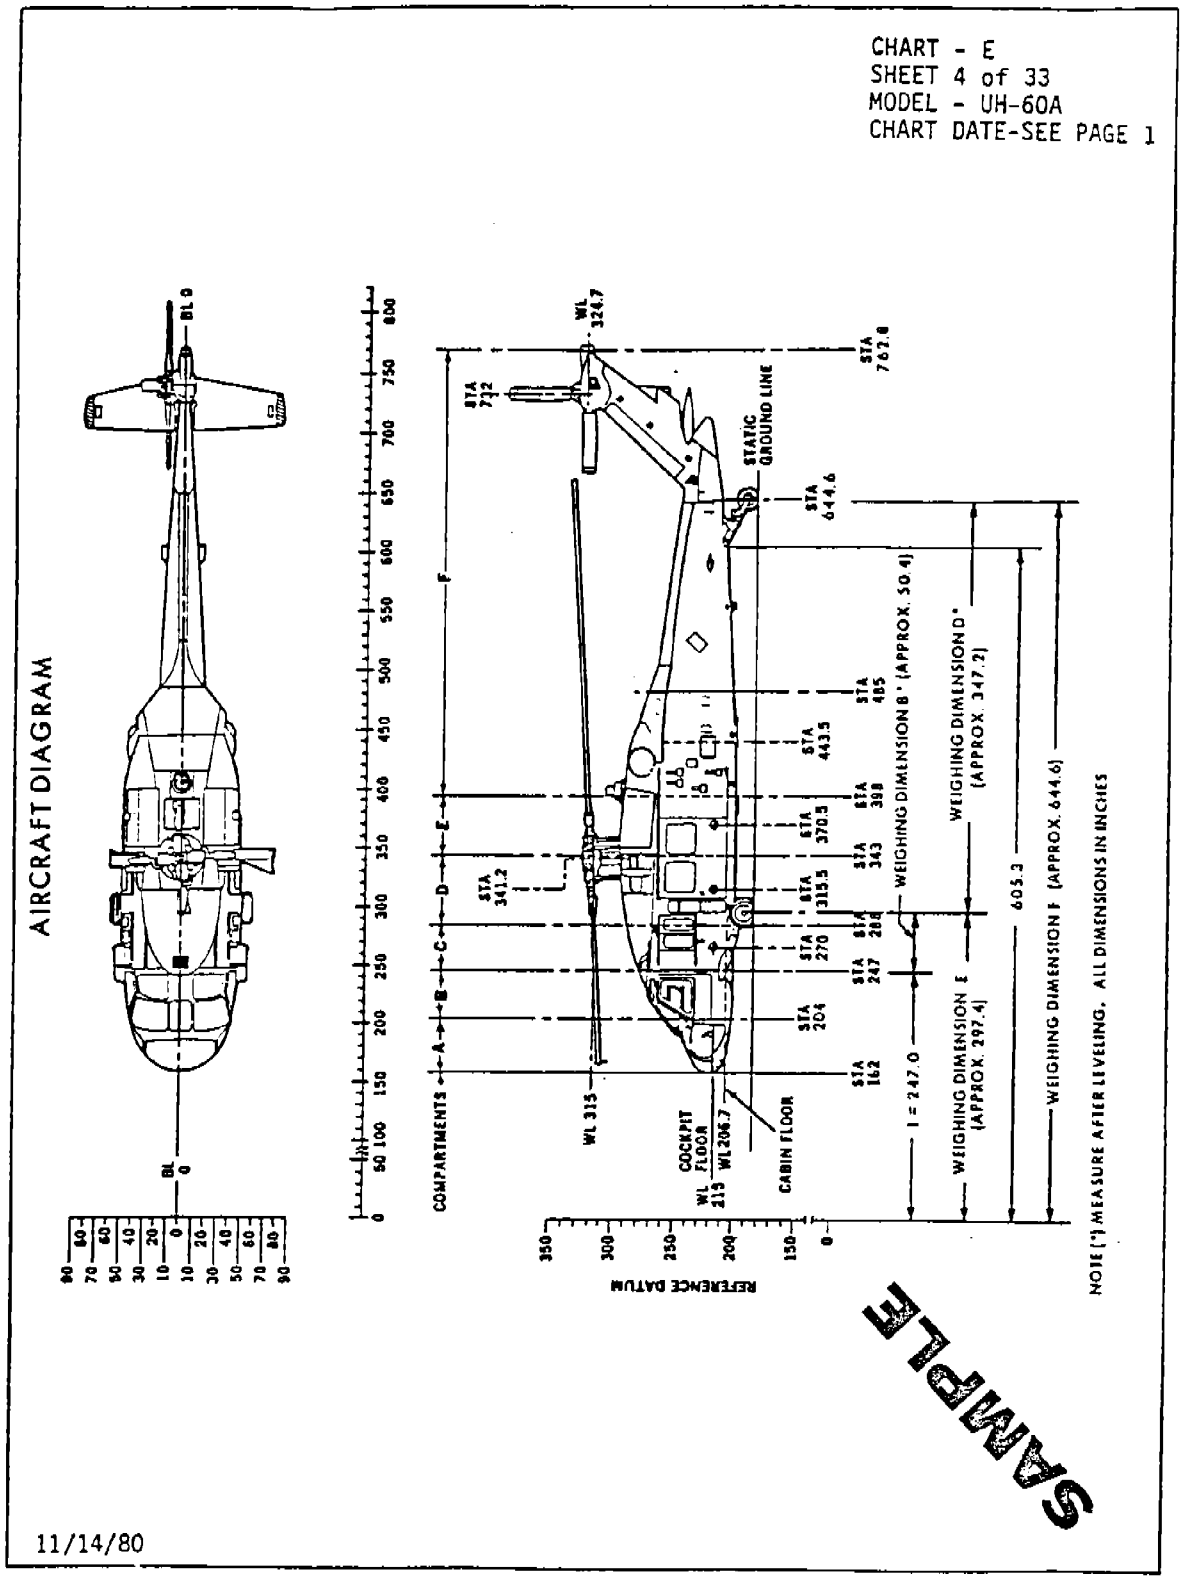
CHART - E
SHEET 4 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1
AIRCRAFT DIAGRAM
BL 0
BL
0
COMPARTMENTS
A
B
C
D
E
F
STA 162
STA 204
STA 247
STA 270
STA 284
STA 315.5
STA 341.2
STA 343
STA 370.5
STA 398
STA 443.5
STA 485
STA 644.6
STA 732
STA 762.8
WL 324.7
WL 315
COCKPIT FLOOR
WL 206.7
CABIN FLOOR
STATIC GROUND LINE
REFERENCE DATUM
I = 247.0
WEIGHING DIMENSION E (APPROX. 297.4)
WEIGHING DIMENSION B * (APPROX. 50.4)
WEIGHING DIMENSION D * (APPROX. 347.2)
605.3
WEIGHING DIMENSION F (APPROX. 644.6)
NOTE (*) MEASURE AFTER LEVELING. ALL DIMENSIONS IN INCHES
SAMPLE
11/14/80

(Sheet 3 of 32)

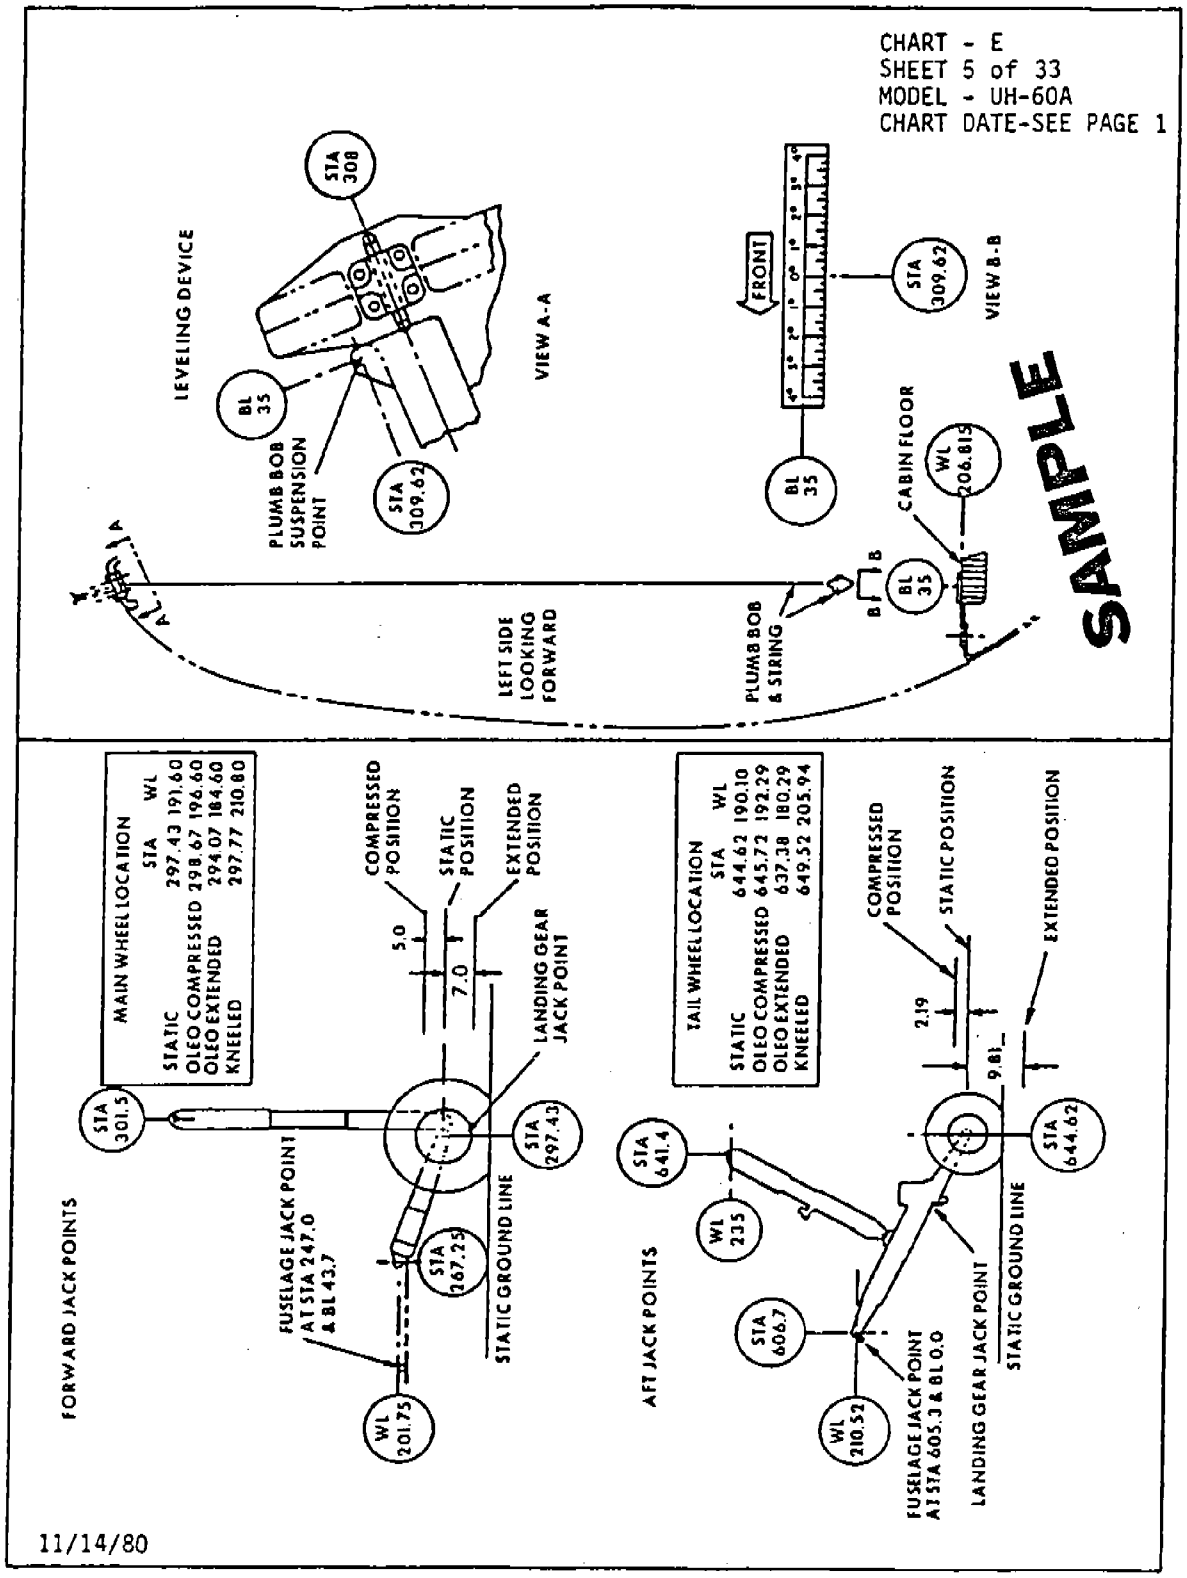
CHART - E
SHEET 5 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1
SAMPLE
LEVELING DEVICE
VIEW A-A
PLUMB BOB SUSPENSION POINT
STA 308
BL 35
STA 309.62
FRONT
STA 309.62
VIEW B-B
BL 35
CABIN FLOOR
WL 206.815
LEFT SIDE LOOKING FORWARD
PLUMB BOB & STRING
MAIN WHEEL LOCATION
STA WL
STATIC 297.43 191.60
OLEO COMPRESSED 298.67 196.60
OLEO EXTENDED 294.07 184.60
KNEELED 297.77 210.80
COMPRESSED POSITION
STATIC POSITION
EXTENDED POSITION
5.0
7.0
LANDING GEAR JACK POINT
STA 301.5
STA 297.43
FUSELAGE JACK POINT AT STA 247.0 & BL 43.7
STA 267.25
STATIC GROUND LINE
WL 201.75
FORWARD JACK POINTS
TAIL WHEEL LOCATION
STA WL
STATIC 644.62 190.10
OLEO COMPRESSED 645.72 192.29
OLEO EXTENDED 637.38 180.29
KNEELED 649.52 205.94
COMPRESSED POSITION
STATIC POSITION
EXTENDED POSITION
2.19
9.81
STA 641.4
WL 235
STA 606.7
WL 210.52
STA 644.62
FUSELAGE JACK POINT AT STA 605.3 & BL 0.0
LANDING GEAR JACK POINT
STATIC GROUND LINE
AFT JACK POINTS
11/14/80

(Sheet 4 of 32)

FUEL LOADING DATA
MAIN FUEL TANKS

CHART - E
SHEET 6 of 33
MODEL - UH-60A
CHART DATE - SEE PAGE 1

FUEL LOADING DATA

FUEL SYSTEM - 2 TANKS

ARM = 420.8 ARM = 420.8

CAP = 359.7 GAL. (2 TANKS)

WEIGHT (LB)	MOM/1000	WEIGHT (LB)	MOM/1000
50	21.0	1250	526.0
100	42.1	1300	547.0
150	63.1	1350	568.1
200	84.2	1400	589.1
250	105.2	1450	610.2
300	126.2	1500	631.2
350	147.3	1550	652.2
400	168.3	1600	673.3
450	189.4	1650	694.3
500	210.4	1700	715.4
550	231.4	1750	736.4
600	252.5	1800	757.4
650	273.5	1850	778.5
700	294.6	1900	799.5
750	315.6	1950	820.6
800	336.6	2000	841.6
850	357.7	2050	862.6
900	378.7	2100	883.7
950	399.8	2150	904.7
1000	420.8	2200	925.8
1050	441.8	2250	946.8
1100	462.9	2300	967.3
1150	483.9	*2338	983.8
1200	505.0	2350	988.9
		2400	1009.9
		**2446	1029.3


NOTES:

1. (*) The single asterisk indicates the approximate weight and moment for full fuel tanks using JP-4 fuel at 6.5 lb per gallon.
2. (**) The double asterisk indicates the approximate weight and moment for full fuel tanks using JP-5 fuel at 6.8 lb. per gallon.
3. The total usage fuel capacity of 359.7 gal. (179.8 gal. per tank) is estimated pending test verification.
4. Total weight of fuel is dependent upon specific gravity and temperature. Therefore, the notation "FULL" does not appear on the fuel quantity gauges. Variation should be expected in gauge readings when tanks are full.

SAMPLE

12/2/82

(Sheet 5 of 32)

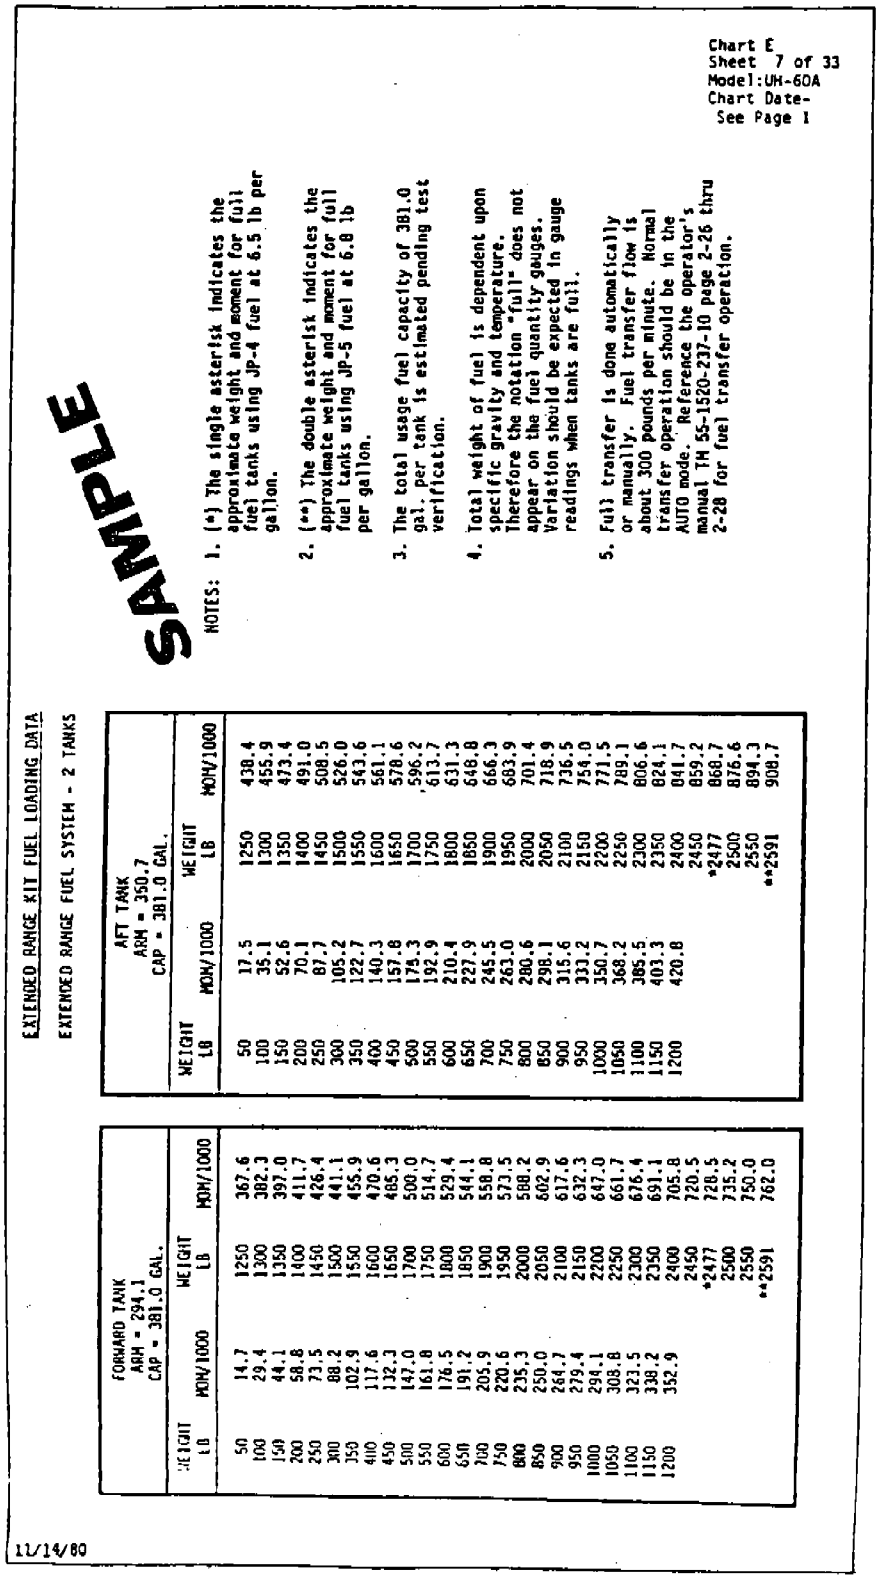

EXTENDED RANGE KIT FUEL LOADING DATA

EXTENDED RANGE FUEL SYSTEM - 2 TANKS

SAMPLE

Chart E
Sheet 7 of 33
Model:UH-60A
Chart Date-
See Page 1


FORWARD TANK ARM = 294.1 CAP = 381.0 GAL.			
WEIGHT LB	MOM/1000	WEIGHT LB	MOM/1000
50	14.7	1250	367.6
100	29.4	1300	382.3
150	44.1	1350	397.0
200	58.8	1400	411.7
250	73.5	1450	426.4
300	88.2	1500	441.1
350	102.9	1550	455.9
400	117.6	1600	470.6
450	132.3	1650	485.3
500	147.0	1700	500.0
550	161.8	1750	514.7
600	176.5	1800	529.4
650	191.2	1850	544.1
700	205.9	1900	558.8
750	220.6	1950	573.5
800	235.3	2000	588.2
850	250.0	2050	602.9
900	264.7	2100	617.6
950	279.4	2150	632.3
1000	294.1	2200	647.0
1050	308.8	2250	661.7
1100	323.5	2300	676.4
1150	338.2	2350	691.1
1200	352.9	2400	705.8
		2450	720.5
		*2477	728.5
		2500	735.2
		2550	750.0
		**2591	762.0

AFT TANK ARM = 350.7 CAP = 381.0 GAL.			
WEIGHT LB	MOM/1000	WEIGHT LB	MOM/1000
50	17.5	1250	438.4
100	35.1	1300	455.9
150	52.6	1350	473.4
200	70.1	1400	491.0
250	87.7	1450	508.5
300	105.2	1500	526.0
350	122.7	1550	543.6
400	140.3	1600	561.1
450	157.8	1650	578.6
500	175.3	1700	596.2
550	192.9	1750	613.7
600	210.4	1800	631.3
650	227.9	1850	648.8
700	245.5	1900	666.3
750	263.0	1950	683.9
800	280.6	2000	701.4
850	298.1	2050	718.9
900	315.6	2100	736.5
950	333.2	2150	754.0
1000	350.7	2200	771.5
1050	368.2	2250	789.1
1100	385.5	2300	806.6
1150	403.3	2350	824.1
1200	420.8	2400	841.7
		2450	859.2
		*2477	868.7
		2500	876.6
		2550	894.3
		**2591	908.7

NOTES:
1. (*) The single asterisk indicates the approximate weight and moment for full fuel tanks using JP-4 fuel at 6.5 lb per gallon.
2. (**) The double asterisk indicates the approximate weight and moment for full fuel tanks using JP-5 fuel at 6.8 lb per gallon.
3. The total usage fuel capacity of 381.0 gal. per tank is estimated pending test verification.
4. Total weight of fuel is dependent upon specific gravity and temperature. Therefore the notation "full" does not appear on the fuel quantity gauges. Variation should be expected in gauge readings when tanks are full.
5. Full transfer is done automatically or manually. Fuel transfer flow is about 300 pounds per minute. Normal transfer operation should be in the AUTO mode. Reference the operator's manual TM 55-1520-237-10 page 2-26 thru 2-28 for fuel transfer operation.

11/14/80

(Sheet 6 of 32)

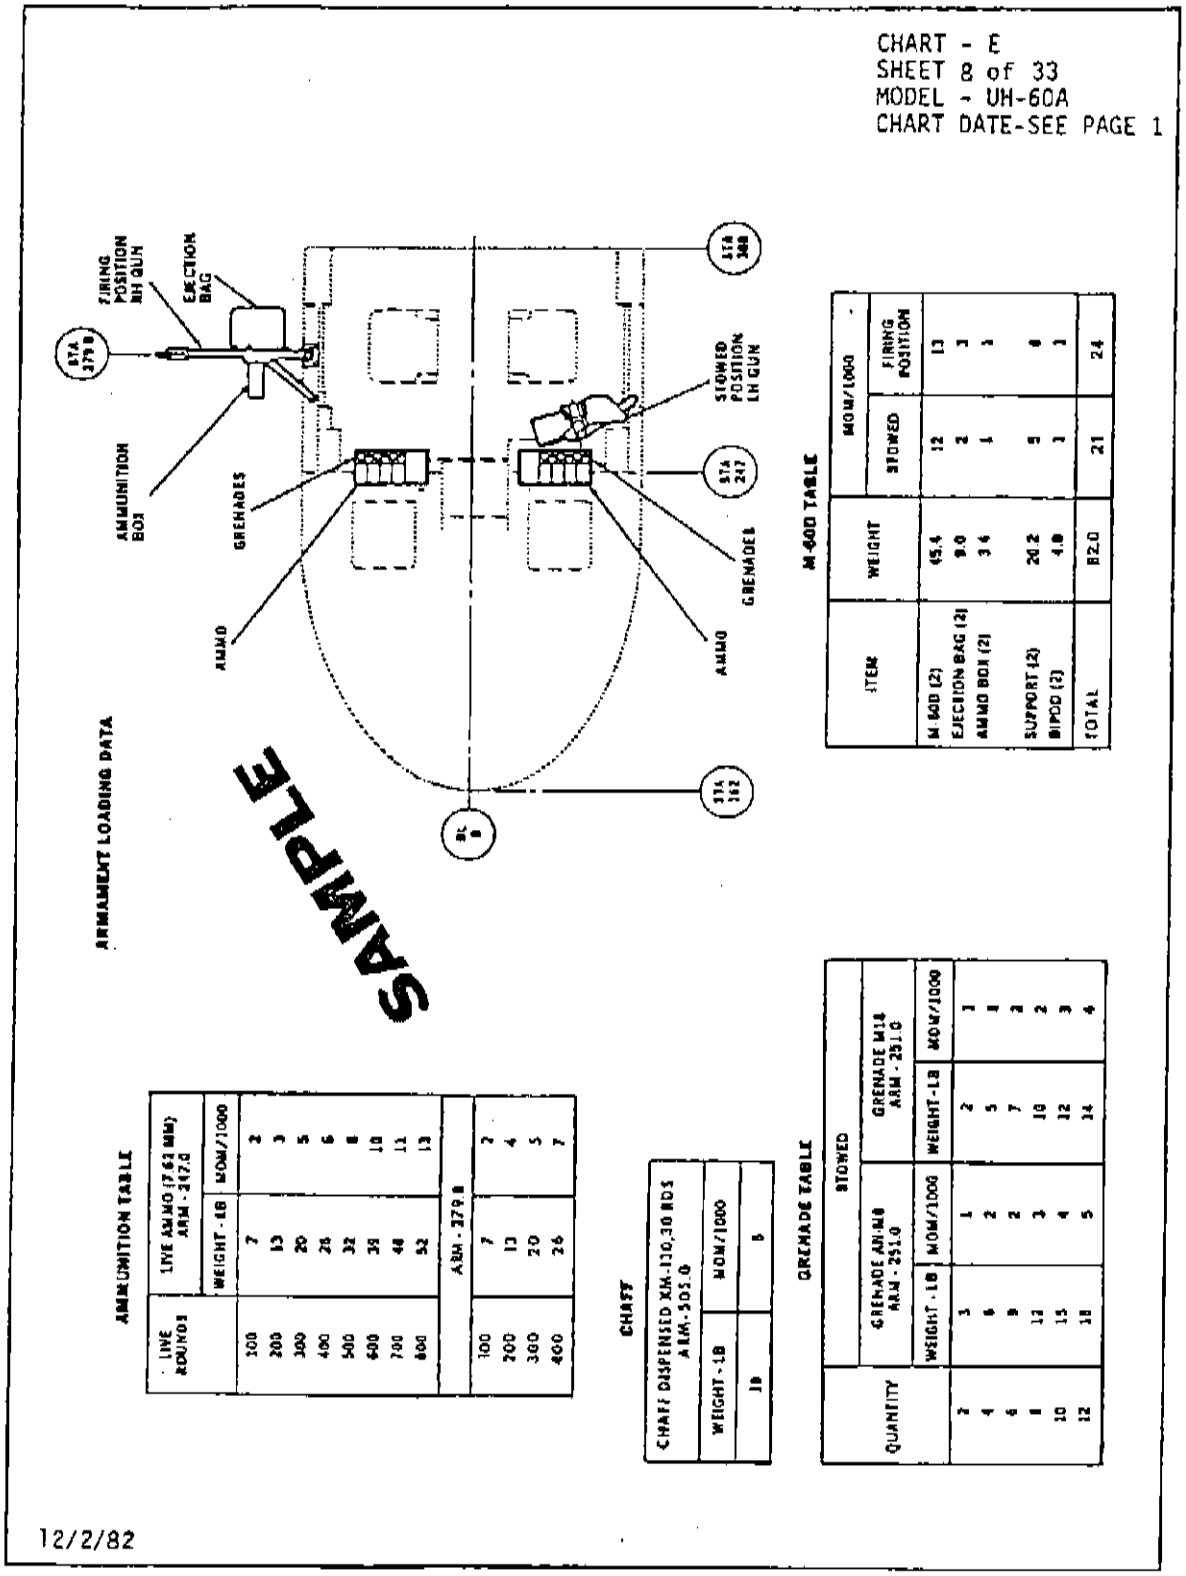
CHART - E
SHEET 8 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1
ARMAMENT LOADING DATA
SAMPLE
FIRING POSITION RH GUN
EJECTION BAG
AMMUNITION BOX
GRENADES
AMMO
STOWED POSITION LH GUN
GRENADES
AMMO
STA 279.8
STA 348
STA 247
STA 112
BL 0
M-60D TABLE
ITEM
WEIGHT
MOM/1000
STOWED
FIRING POSITION
M 60D (2)
EJECTION BAG (2)
AMMO BOX (2)
SUPPORT (2)
BIPOD (2)
TOTAL
45.4
9.0
3.6
20.2
4.8
82.0
12
2
1
5
1
21
13
3
1
6
1
24
AMMUNITION TABLE
LIVE ROUNDS
LIVE AMMO (7.62 MM) ARM - 247.8
WEIGHT - LB
MOM/1000
ARM - 279.8
100
200
300
400
500
600
700
800
7
13
20
26
32
39
46
52
2
3
5
6
8
10
11
13
100
200
300
400
7
13
20
26
2
4
5
7
CHAFF
CHAFF DISPENSER XM-130,30 RDS ARM-305.0
WEIGHT - LB
MOM/1000
10
5
GRENADE TABLE
QUANTITY
STOWED
GRENADE AN-M8 ARM - 251.0
GRENADE M18 ARM - 251.0
WEIGHT - LB
MOM/1000
WEIGHT - LB
MOM/1000
2
4
6
8
10
12
3
6
9
13
15
18
1
2
3
4
5
6
2
5
7
10
12
14
1
1
2
2
3
4
12/2/82

(Sheet 7 of 32)

12/2/82

(Sheet 8 of 32)

CHART - E
SHEET 9 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

COMPARTMENT DATA

COMPARTMENT DESIGNATION	A	B	C	D	E	F	G
	AVIONICS	COCKPIT	FWD CABIN	CENTER CABIN	AFT CABIN	AFT SECTION	UPPER DECK
CENTROID STATION (1)	183	225.5	270 (3)	315.5	370.5	420.8 (2)	363
FORWARD STATION (1)	162	204	252 (3)	288	343	398	241
AFT STATION (1)	204	247	288	343	398	762.8	485
MAXIMUM CAPACITY (5) (LB)			5460	8370	8370	250 (4)	
FLOOR CAPACITY (LBS PER SQ. FT.)			300	300	300	75	
FLOOR AREA (SQ. FT.)			18.2 (3)	27.9	27.9	12.1 (2)	
VOLUME (CU. FT.)		93	108	144	144	21 (2)	

NOTES:
(1) Inches from reference datum. Centroid stations are mid-compartment stations unless otherwise noted.
(2) Equipment stowage compartments above fuel cells, stations 398-443.5
(3) For the purpose of this chart, the forward cabin limit is taken at station 252.0 instead of station 247.0 to compensate for miscellaneous equipment mounted on the floor.
(4) Equipment stowage compartments above fuel cells, 125 pounds per compartment.
(5) Do not exceed gross weight limitations, see page 29 of 33.

SAMPLE

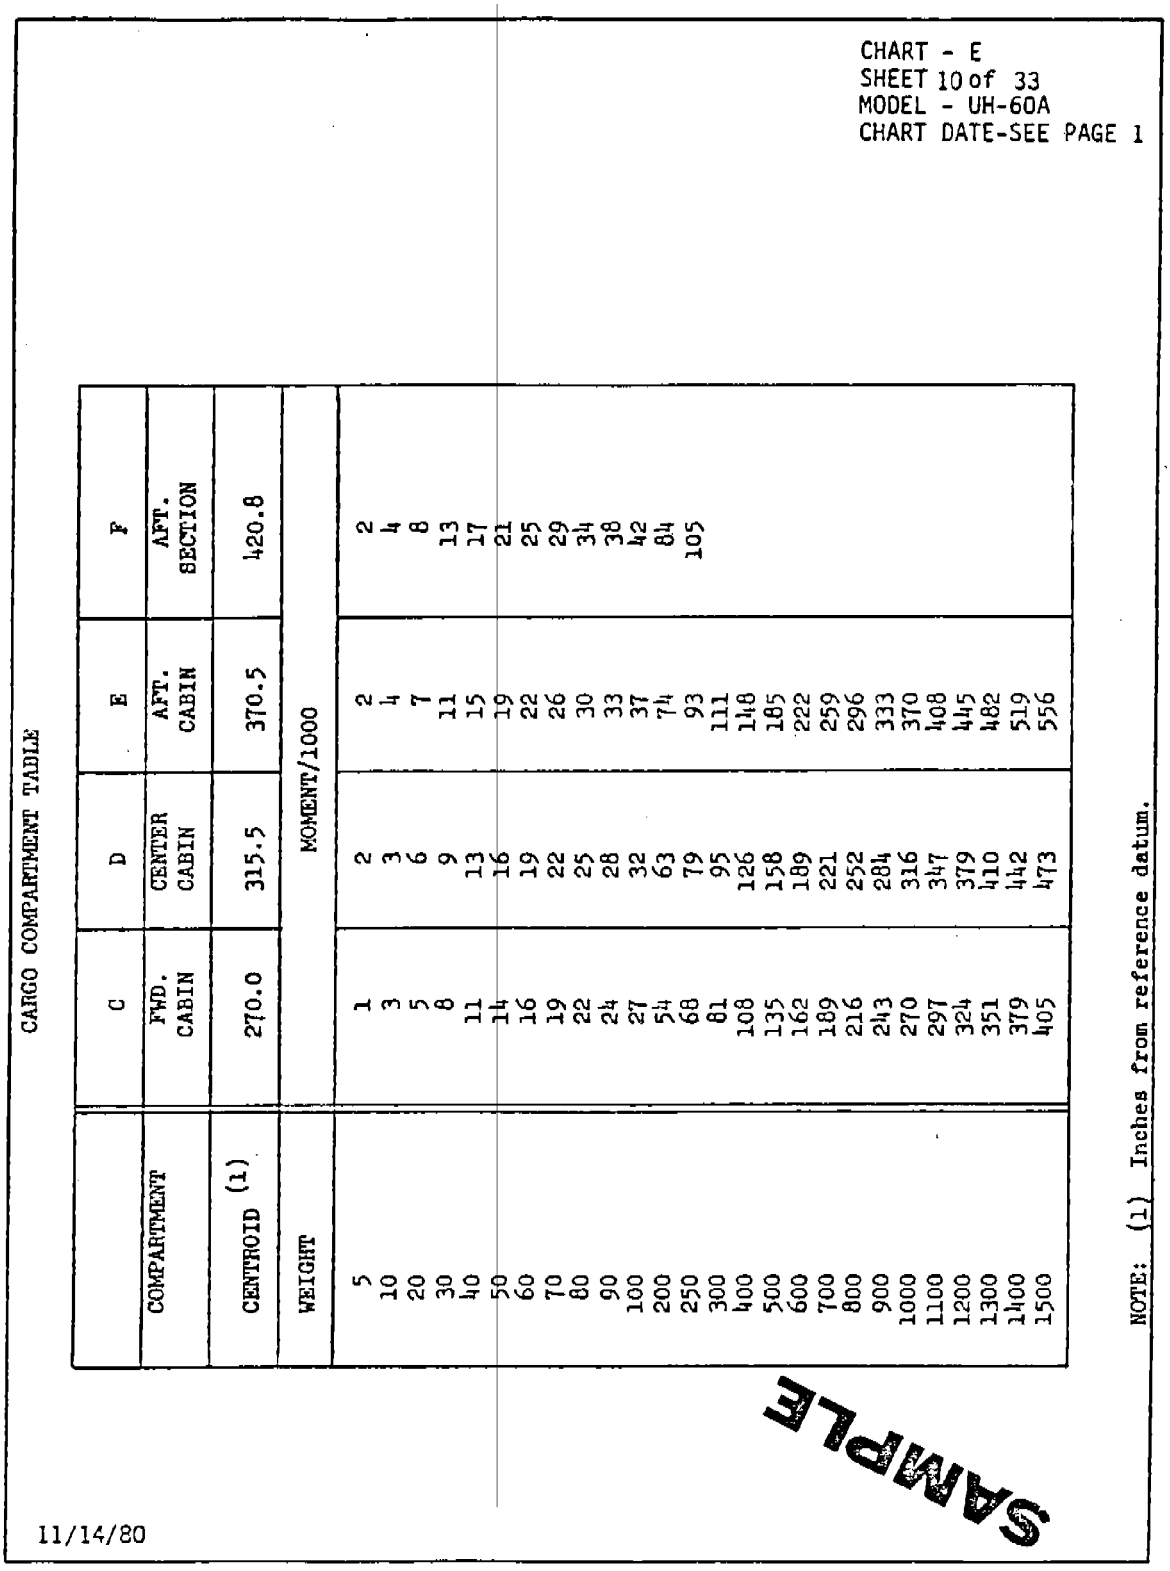


CHART - E
SHEET 10 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

CARGO COMPARTMENT TABLE


	C	D	E	F
COMPARTMENT	FWD. CABIN	CENTER CABIN	AFT. CABIN	AFT. SECTION
CENTROID (1)	270.0	315.5	370.5	420.8
WEIGHT	MOMENT/1000			
5	1	2	2	2
10	3	3	4	4
20	5	6	7	8
30	8	9	11	13
40	11	13	15	17
50	14	16	19	21
60	16	19	22	25
70	19	22	26	29
80	22	25	30	34
90	24	28	33	38
100	27	32	37	42
200	54	63	74	84
250	68	79	93	105
300	81	95	111	
400	108	126	148	
500	135	158	185	
600	162	189	222	
700	189	221	259	
800	216	252	296	
900	243	284	333	
1000	270	316	370	
1100	297	347	408	
1200	324	379	445	
1300	351	410	482	
1400	379	442	519	
1500	405	473	556	

NOTE: (1) Inches from reference datum.

SAMPLE

11/14/80

(Sheet 9 of 32)

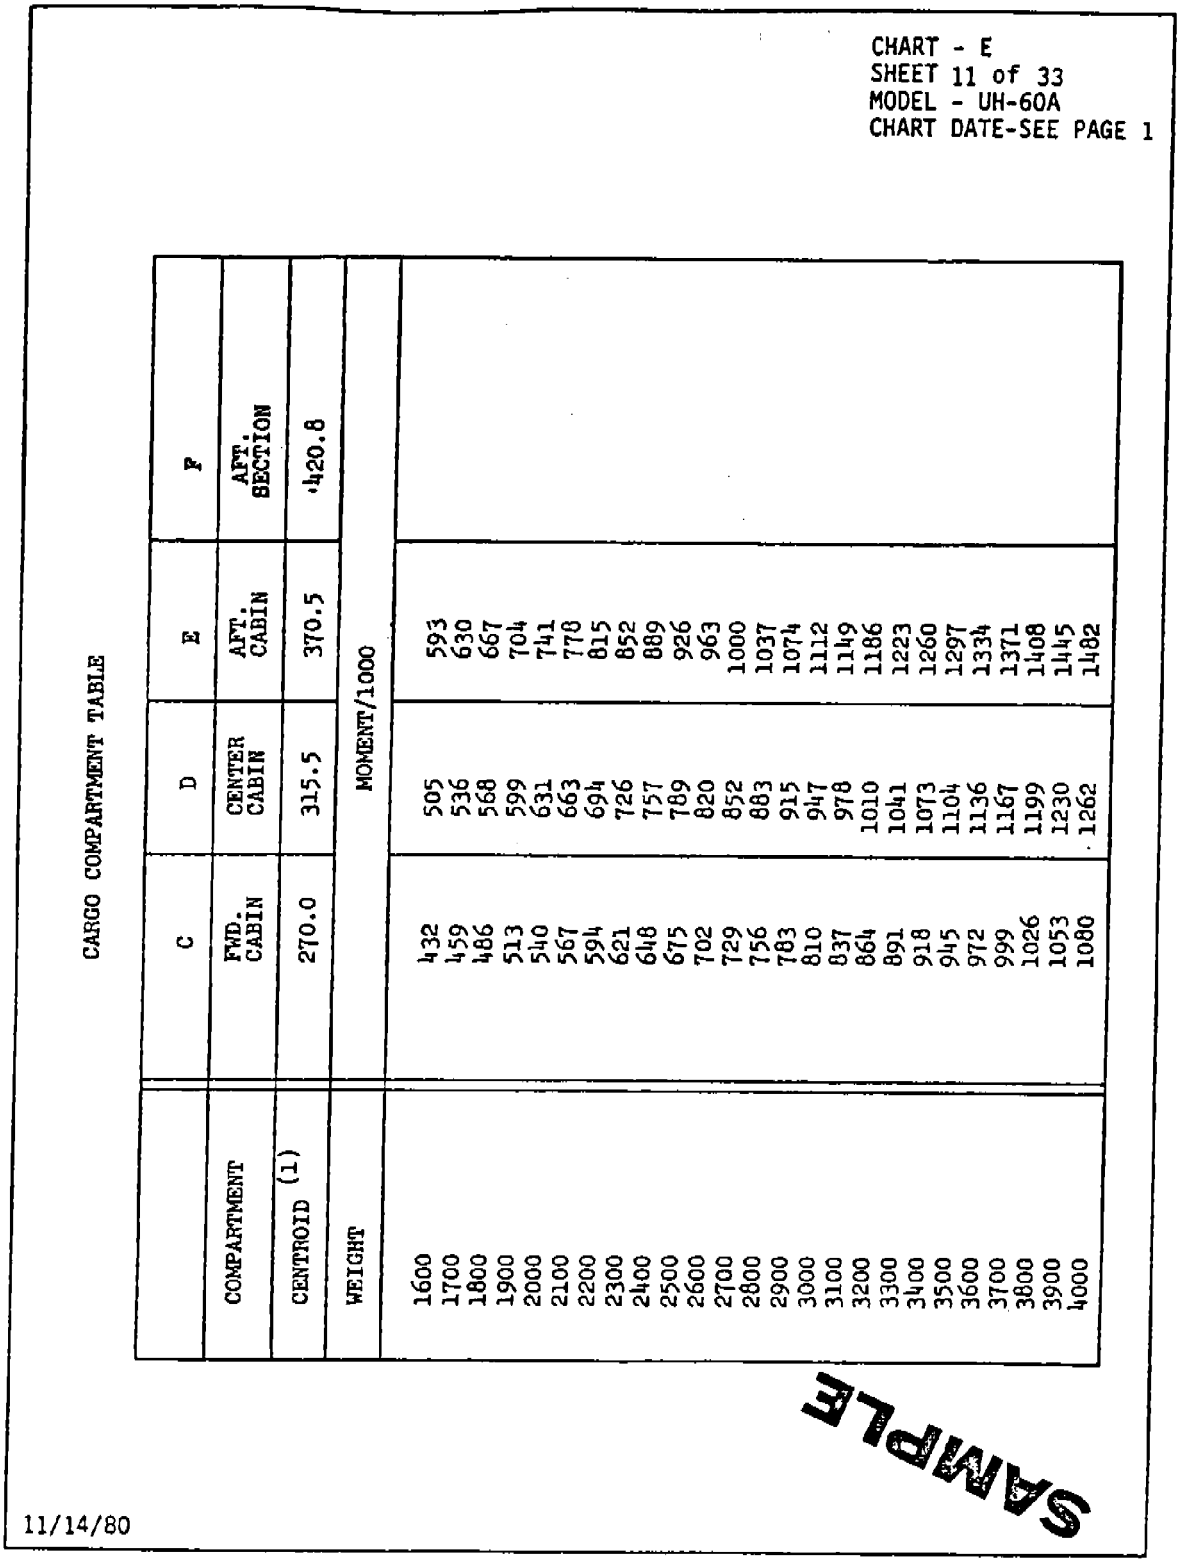

	C	D	E	F
COMPARTMENT	FWD. CABIN	CENTER CABIN	AFT. CABIN	AFT. SECTION
CENTROID (1)	270.0	315.5	370.5	420.8
WEIGHT	MOMENT/1000			
1600	432	505	593	
1700	459	536	630	
1800	486	568	667	
1900	513	599	704	
2000	540	631	741	
2100	567	663	778	
2200	594	694	815	
2300	621	726	852	
2400	648	757	889	
2500	675	789	926	
2600	702	820	963	
2700	729	852	1000	
2800	756	883	1037	
2900	783	915	1074	
3000	810	947	1112	
3100	837	978	1149	
3200	864	1010	1186	
3300	891	1041	1223	
3400	918	1073	1260	
3500	945	1104	1297	
3600	972	1136	1334	
3700	999	1167	1371	
3800	1026	1199	1408	
3900	1053	1230	1445	
4000	1080	1262	1482	

(Sheet 10 of 32)

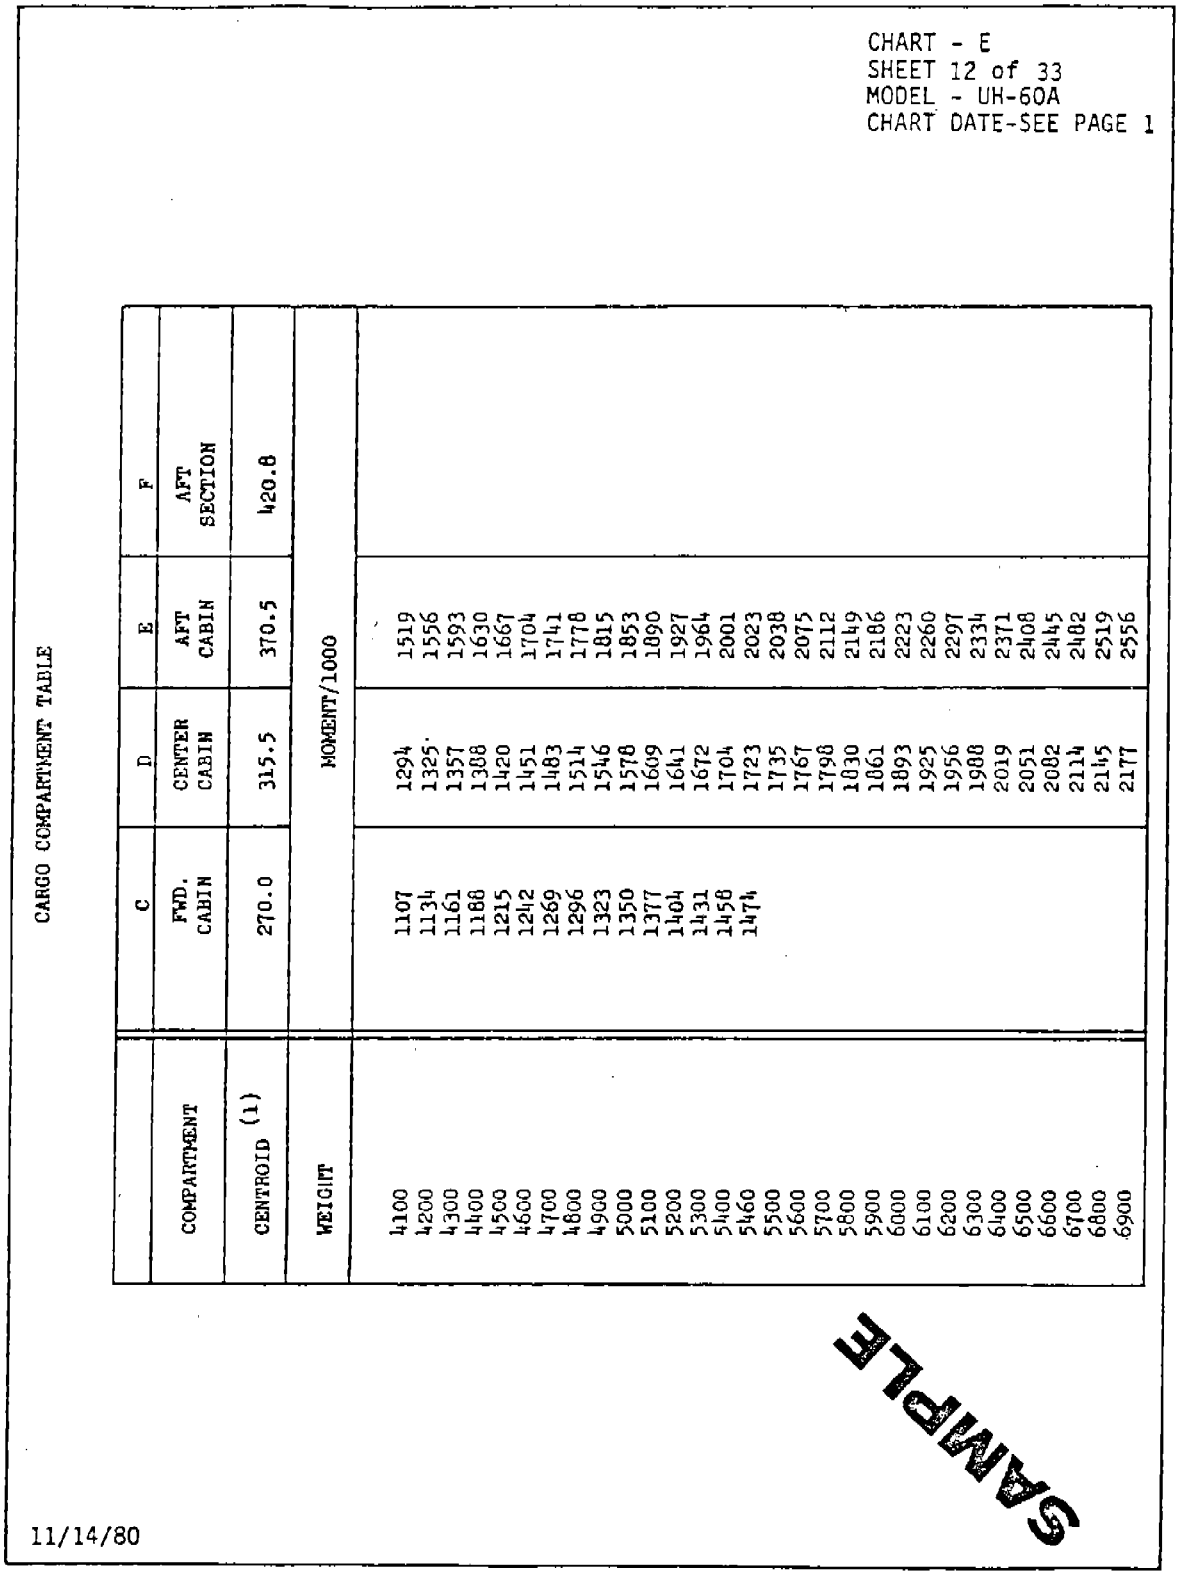


CHART - E
SHEET 12 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1


CARGO COMPARTMENT TABLE

	C	D	E	F
COMPARTMENT	FWD. CABIN	CENTER CABIN	AFT CABIN	AFT SECTION
CENTROID (1)	270.0	315.5	370.5	420.8
WEIGHT	MOMENT/1000			
4100	1107	1294	1519	
4200	1134	1325	1556	
4300	1161	1357	1593	
4400	1188	1388	1630	
4500	1215	1420	1667	
4600	1242	1451	1704	
4700	1269	1483	1741	
4800	1296	1514	1778	
4900	1323	1546	1815	
5000	1350	1578	1853	
5100	1377	1609	1890	
5200	1404	1641	1927	
5300	1431	1672	1964	
5400	1458	1704	2001	
5460	1474	1723	2023	
5500		1735	2038	
5600		1767	2075	
5700		1798	2112	
5800		1830	2149	
5900		1861	2186	
6000		1893	2223	
6100		1925	2260	
6200		1956	2297	
6300		1988	2334	
6400		2019	2371	
6500		2051	2408	
6600		2082	2445	
6700		2114	2482	
6800		2145	2519	
6900		2177	2556	

SAMPLE


11/14/80

(Sheet 11 of 32)

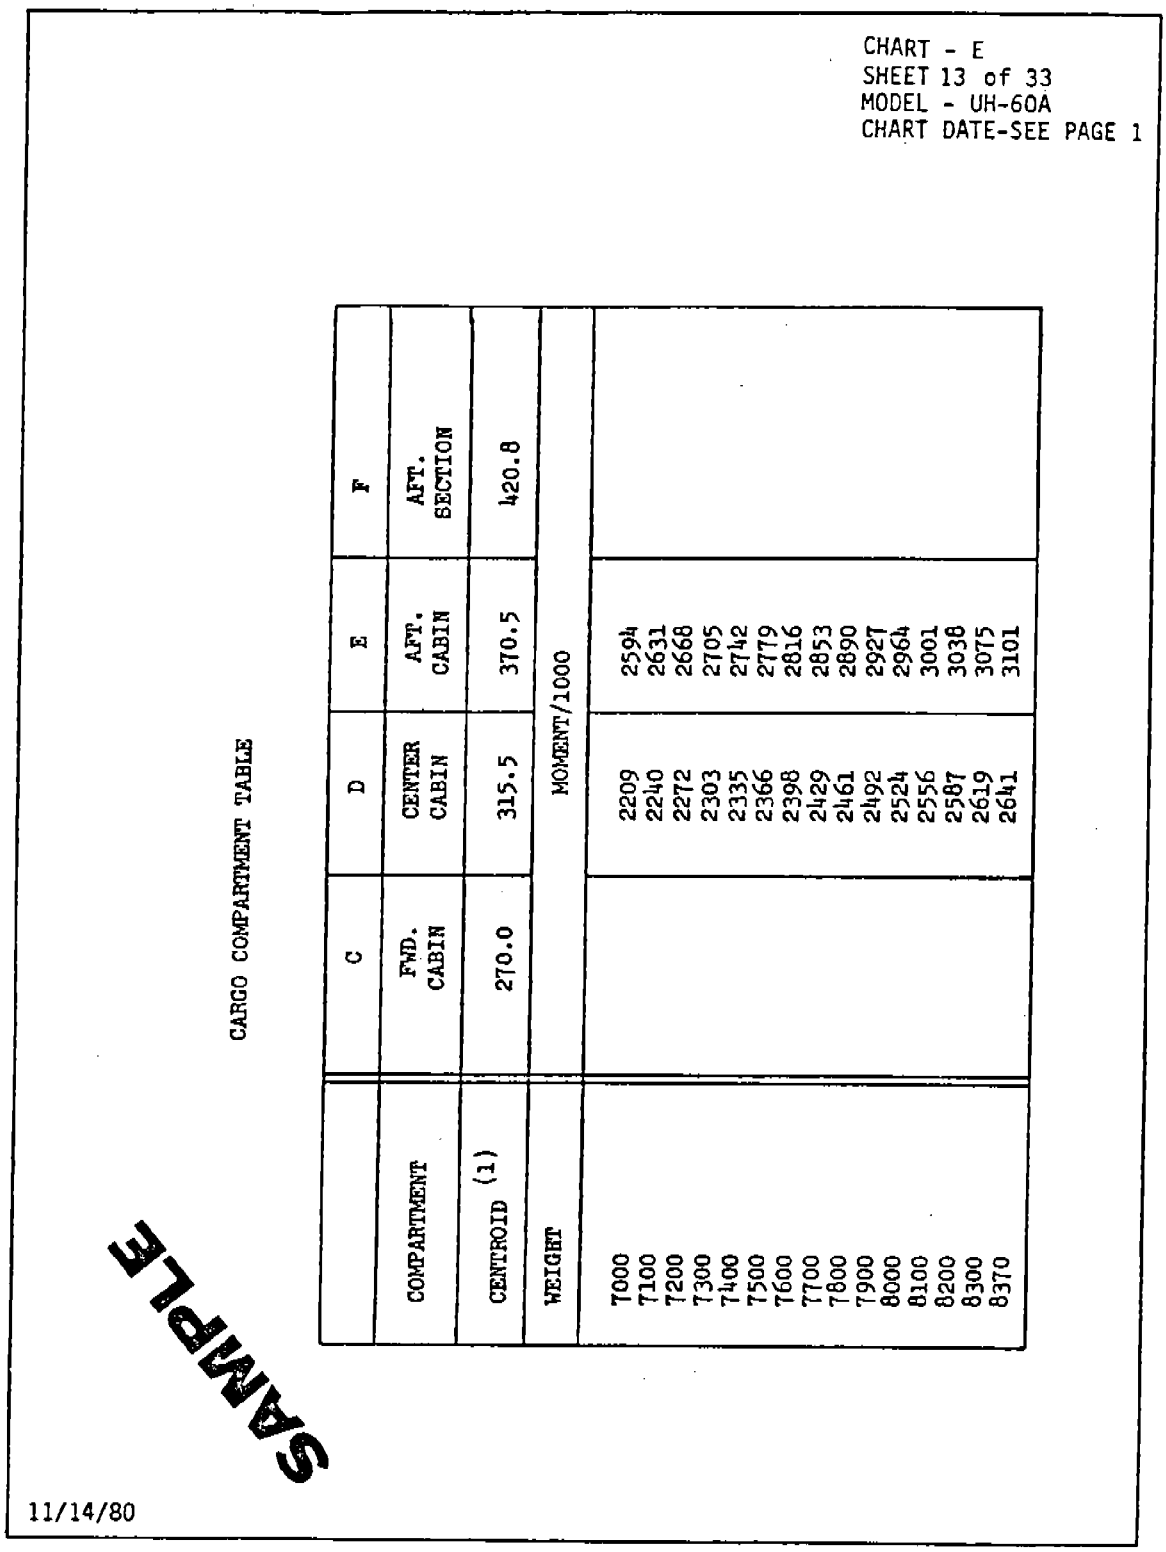


	C	D	E	F
COMPARTMENT	FWD. CABIN	CENTER CABIN	AFT. CABIN	AFT. SECTION
CENTROID (1)	270.0	315.5	370.5	420.8
WEIGHT	MOMENT/1000			
7000		2209	2594	
7100		2240	2631	
7200		2272	2668	
7300		2303	2705	
7400		2335	2742	
7500		2366	2779	
7600		2398	2816	
7700		2429	2853	
7800		2461	2890	
7900		2492	2927	
8000		2524	2964	
8100		2556	3001	
8200		2587	3038	
8300		2619	3075	
8370		2641	3101	


(Sheet 12 of 32)

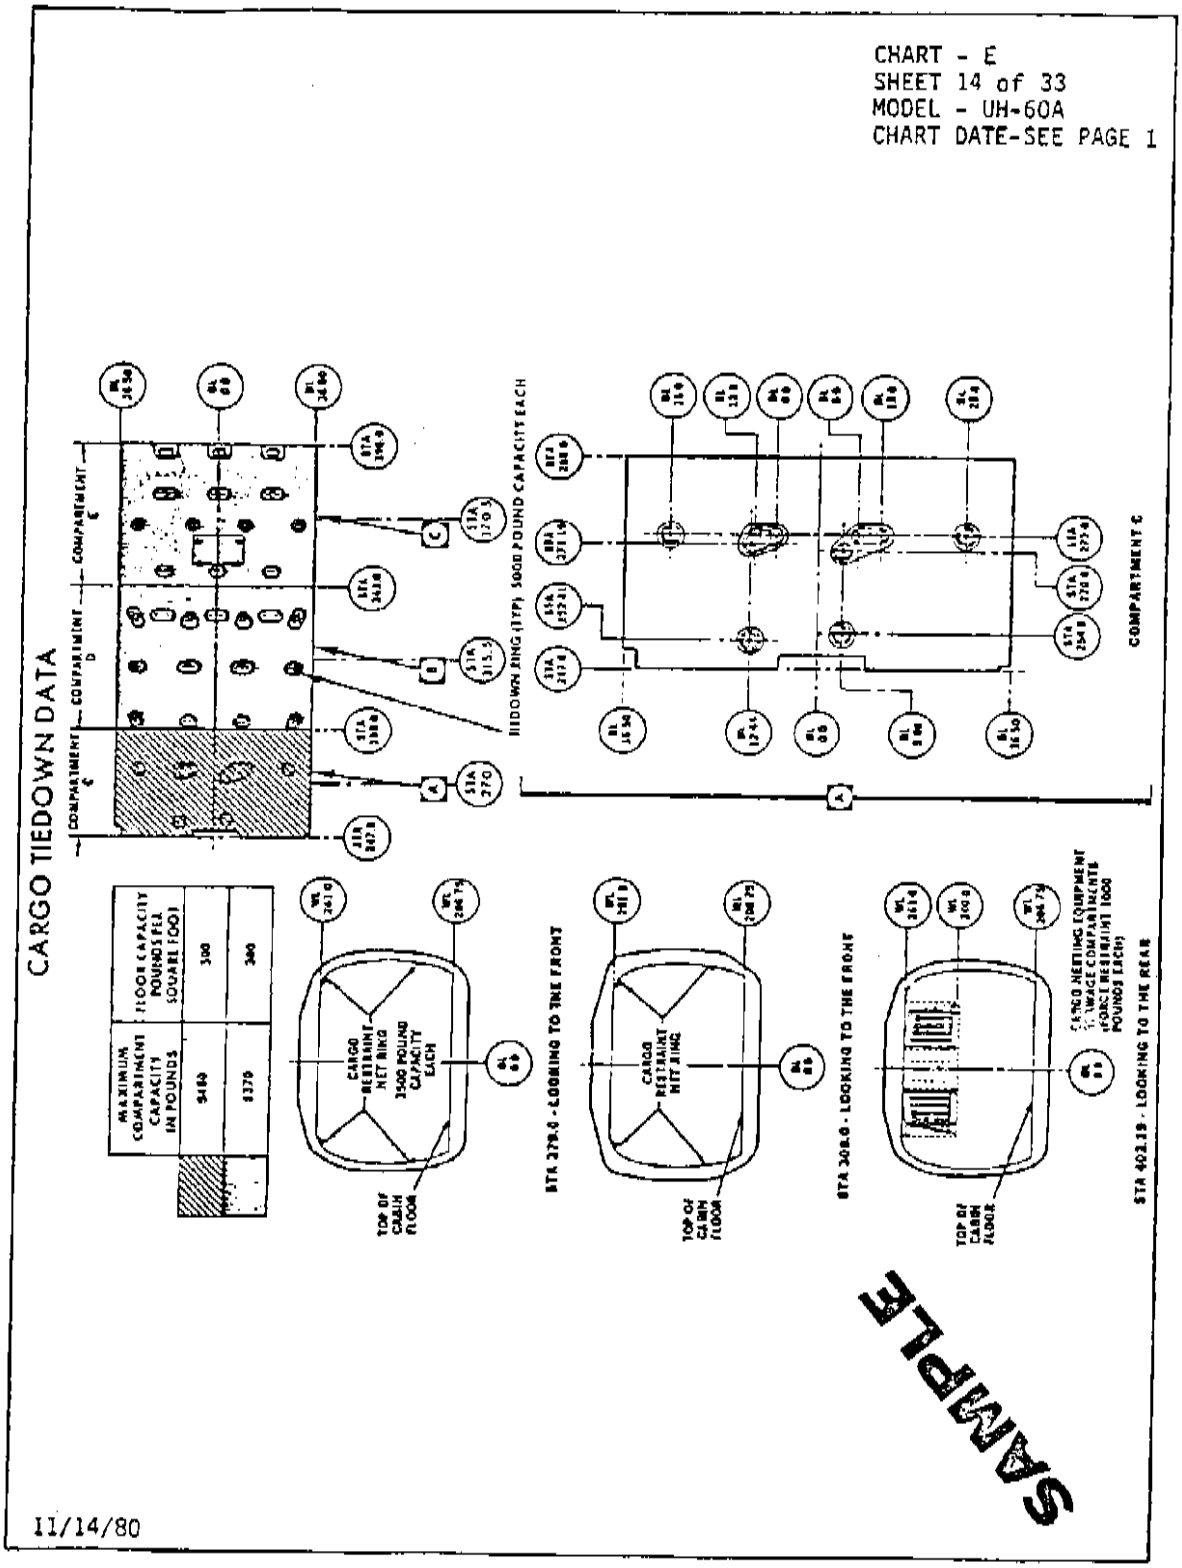

(Sheet 13 of 32)

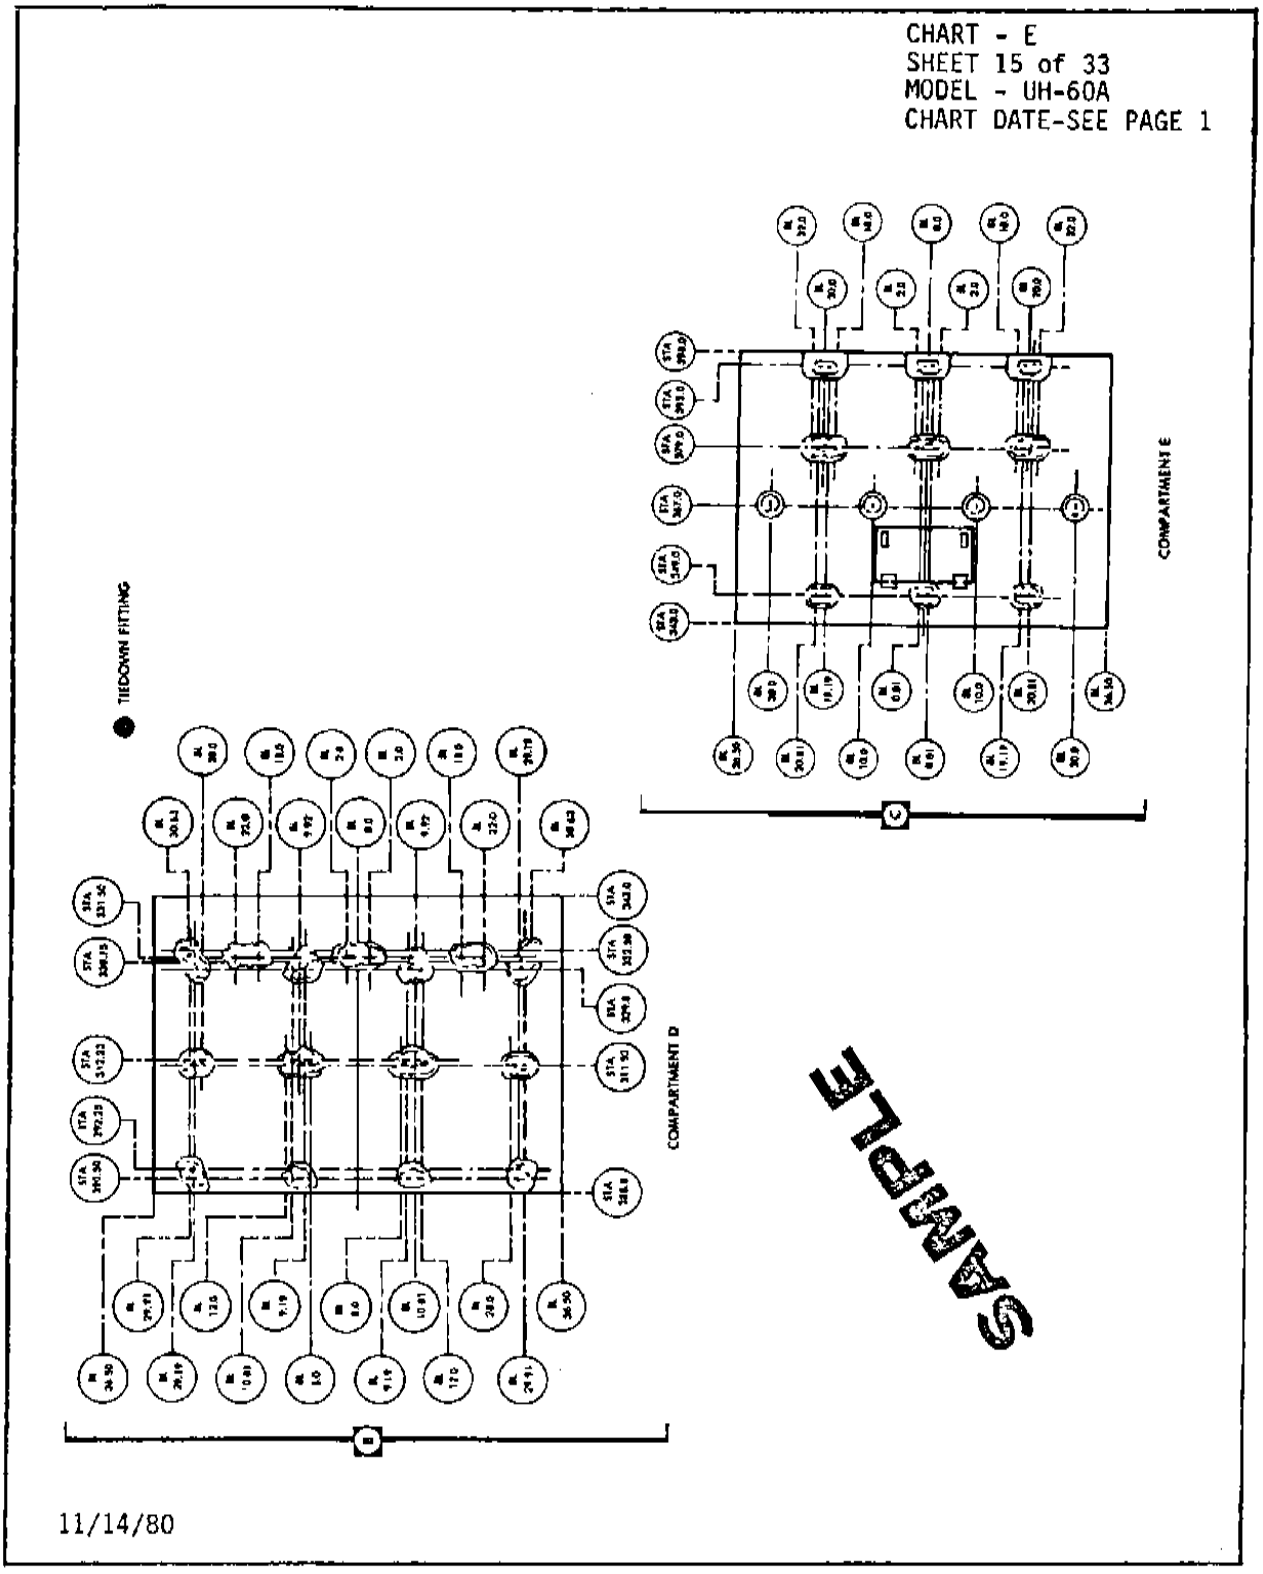


(Sheet 14 of 32)

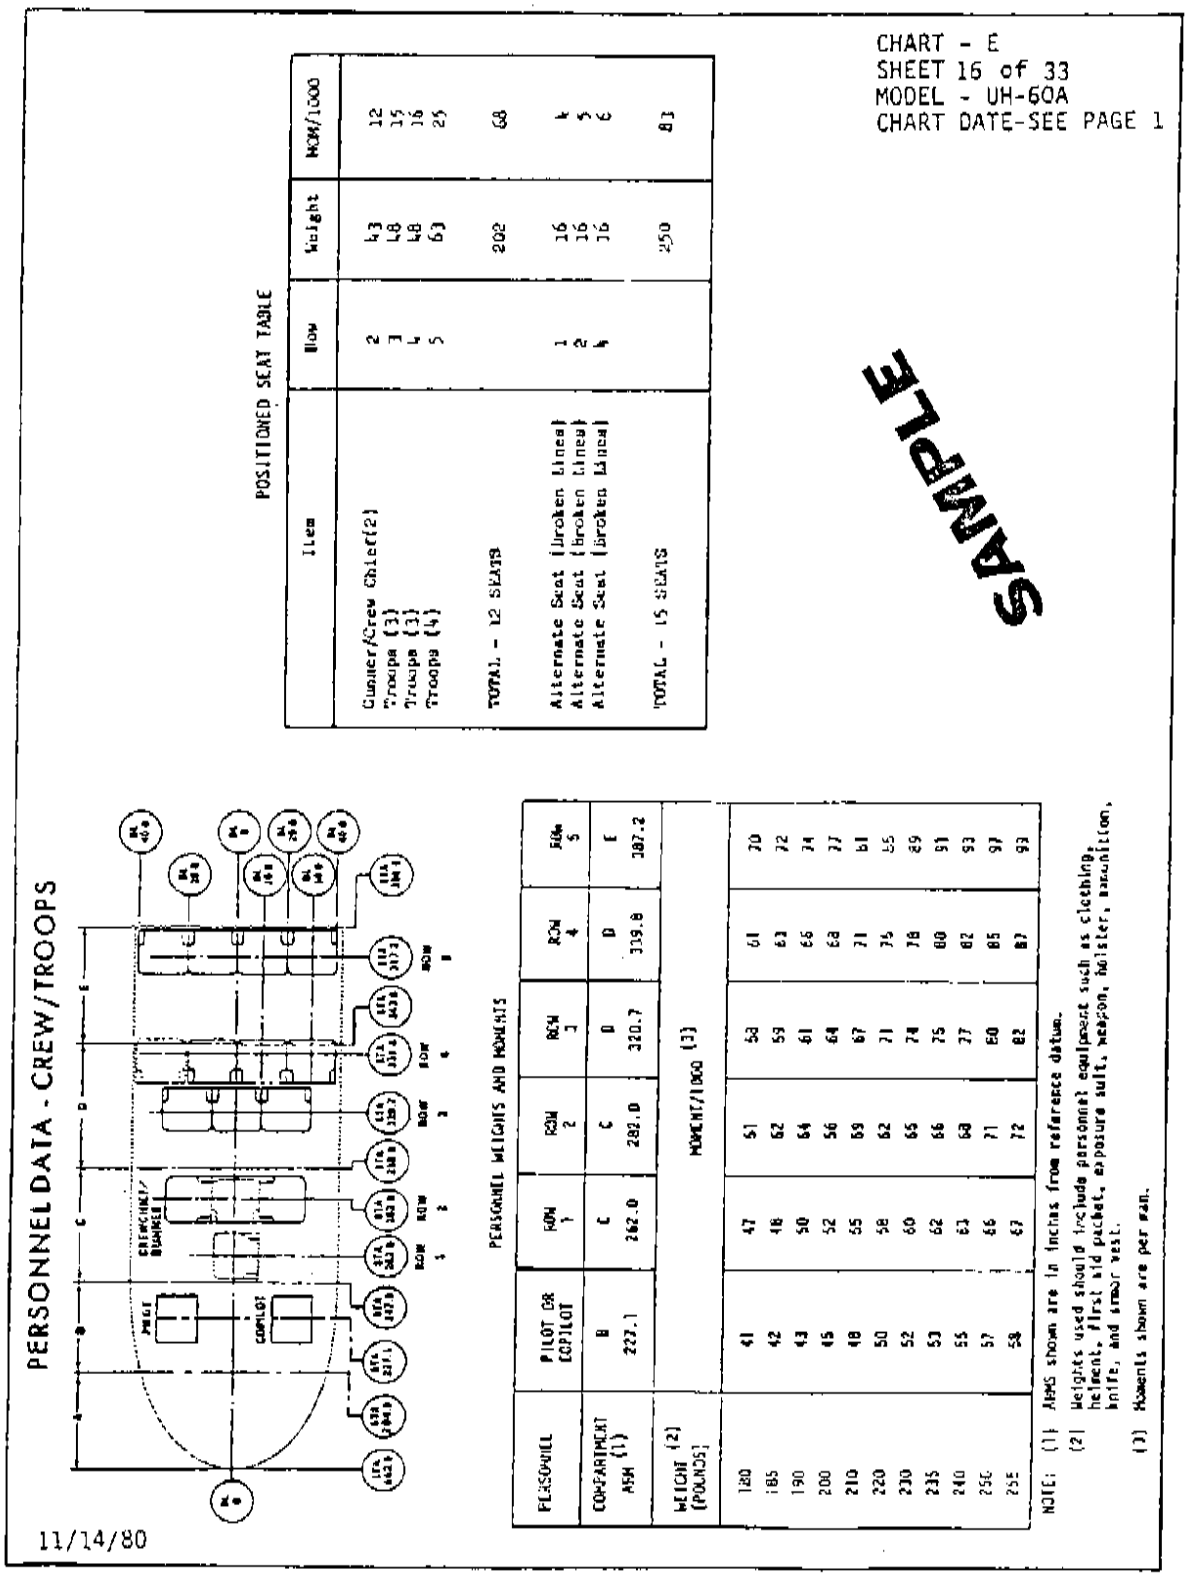

(Sheet 15 of 32)

CHART - E
SHEET 17 of 33
MODEL - UH-60A
CHART DATE - SEE PAGE 1

PERSONNEL DATA - LITTER PATIENTS

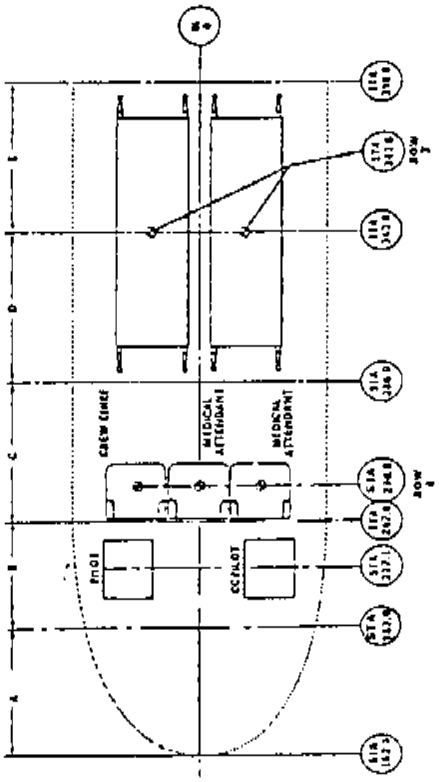

SAMPLE

PERSONNEL WEIGHTS AND MOMENTS			
PERSONNEL	PILOT OR COPILOT	ROW 6	ROW 7
COMPARTMENT ARM (1)	B 227.1	C 270.8	D/E 343.6
WEIGHT (2) (LB.)	MOMENT/1000 (3)		
180	41	49	62
185	42	50	64
190	43	51	65
200	45	54	69
210	48	57	72
220	50	60	76
230	52	62	79
235	53	64	81
240	55	65	82
250	57	68	86
255	58	69	88
260	59	70	89
265	60	72	91

NOTE: (1) ARMS shown are in inches from references datum.

(2) Weight used should include personnel equipment. Litter weight to include 25 pounds for litter, splints, and blankets.


(3) Moments shown are per man.

12/2/82

(Sheet 16 of 32)

CHART - E
SHEET 18 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

STOWAGE COMPARTMENT DATA

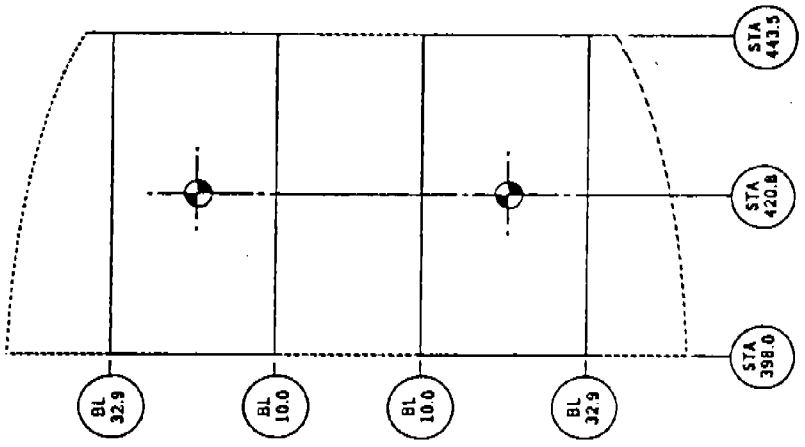

STOWED SEAT TABLE

Item	Row	Weight	MON/1000
Gunner/Crew Chief (2)	2	43	18
Troops (3)	3	48	20
Troops (3)	4	48	20
Troops (4)	5	63	27
TOTAL - 12 SEATS		202	85
Alternate (1)	1	16	7
Alternate (1)	2	16	7
Alternate (1)	4	16	7
TOTAL - 15 SEATS		250	106

NOTE: See Page 16 of 33 for Row Designation.

SAMPLE

12/2/82

(Sheet 17 of 32)

(Sheet 18 of 32)

12/2/82

TABLE OF MOMENTS FOR PERSONNEL MOVEMENT FOR TROOP ASSAULT AND MEDEVAC MISSIONS 180 POUNDS PER PASSENGER

COMPARTMENT	B	C	C	D	D	E	C	D/E
ROW	PILOT OR COPILOT	ROW 1	ROW 2	ROW 3	ROW 4	ROW 5	ROW 6 (MEDEVAC)	ROW 7 (LITTERS)
ARM (INCHES)	227.1	262.0	282.0	320.7	339.8	387.2	270.8	343.6
MOMENT/1000 FOR ONE 180 LB. MAN	41	47	51	58	61	70	49	62

ROW	CHANGE IN MOMENT/1000						
ROW 7 (LITTERS)	21						13
ROW 6 (MEDEVAC)	8						
ROW 5	29	23	19	12	9		
ROW 4	20	14	10	3			
ROW 3	17	11	7				
ROW 2	10	4					
ROW 1	6						

SAMPLE

NOTE: Add Moment change, plus (+) sign, for passenger movement Aft.
Subtract moment change, minus (-) sign, for movement forward.

Example 1 - Passenger moves from Row 1 to Row 5:
Intersect column "Row 1" with line "Row 5" and read change in Moment/1000 of 23. (Use plus (+) sign since this is a movement aft).

Example 2 - Passenger moves from Row 4 to Row 3:
Intersect line "Row 4" with column "Row 3" and read change in Moment/1000 of 3. (Use minus (-) sign since this is a movement forward).

CHART - E
SHEET 19 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

12/2/82

TABLE OF MOMENTS FOR PERSONNEL MOVEMENT
FOR TROOP ASSAULT AND MEDEVAC MISSIONS
200 POUNDS PER PASSENGER

COMPARTMENT	B	C	C	D	D	E	C	D/E
ROW	PILOT OR COPILOT	ROW 1	ROW 2	ROW 3	ROW 4	ROW 5	ROW 6 (MEDEVAC)	ROW 7 (LITTERS)
ARM (INCHES)	227.1	262.0	282.0	320.7	339.8	387.2	270.8	343.6
MOMENT/1000 FOR ONE 200 LB. MAN	45	52	56	64	68	77	54	69
ROW	CHANGE IN MOMENT/1000							
ROW 7 (LITTERS)	24						15	
ROW 6 (MEDEVAC)	9							
ROW 5	32	25	21	13	9			
ROW 4	23	16	12	4				
ROW 3	19	12	8					
ROW 2	11	4						
ROW 1	7							

SAMPLE

NOTE: Add moment change, plus (+) sign, for passenger movement Aft.
Subtract moment change, minus(-) sign, for movement forward.

Example 1 - Passenger moves from Row 1 to Row 5:
Intersect column "Row 1" with line "Row 5" and read change in Moment/1000 of 25. (Use plus (+) sign since this is a movement aft.)

Example 2 - Passenger moves from Row 4 to Row 3:
Intersect line "Row 4" with column "Row 3" and read change in Moment/1000 of 4. (Use minus (-) sign since this is a movement forward.)

CHART - E
SHEET 20 of 33
MODEL - UH-60A
CHART DATE - SEE PAGE 1

(Sheet 19 of 32)

12/2/82

TABLE OF MOMENTS FOR PERSONNEL MOVEMENT
FOR TROOP ASSAULT AND MEDEVAC MISSIONS
220 POUNDS PER PASSENGER

COMPARTMENT	B	C	C	D	D	E	C	D/E
ROW	PILOT OR COPILOT	ROW 1	ROW 2	ROW 3	ROW 4	ROW 5	ROW 6 (MEDEVAC)	ROW 7 (LITTERS)
ARM (INCHES)	227.1	262.0	282.0	320.7	339.8	387.2	270.8	343.6
MOMENT/1000 FOR ONE 220 LB. MAN	50	58	62	71	75	85	60	76
ROW	CHANGE IN MOMENT/1000							
ROW 7 (LITTERS)	26						16	
ROW 6 (MEDEVAC)	10							
ROW 5	35	27	23	14	10			
ROW 4	25	17	13	4				
ROW 3	21	13	9					
ROW 2	12	4						
ROW 1	0							

SAMPLE

NOTE: Add moment change, plus (+) sign, for passenger movement Aft.
Subtract moment change, minus (-) sign, for movement forward.

Example 1 - Passenger moves from Row 1 to Row 5:
Intersect column "Row 1" with line "Row 5" and read change in Moment/1000 of 27. (Use plus (+) sign since this is a movement aft.)

Example 2 - Passenger moves from Row 4 to Row 3:
Intersect line "Row 4" with column "Row 3" and read change in Moment/1000 of 4. (Use minus (-) sign since this is a movement forward.)

CHART - E
SHEET 21 of 33
MODEL - UH-60A
CHART DATE - SEE PAGE 1

(Sheet 20 of 32)

CHART - E
SHEET 22 of 33
MODEL - UH-60A
CHART DATE - SEE PAGE 1

12/2/82

TABLE OF MOMENTS FOR PERSONNEL MOVEMENT
FOR TROOP ASSAULT AND MEDEVAC MISSIONS

240 POUNDS PER PASSENGER

COMPARTMENT	B	C	C	D	D	E	C	D/E
ROW	PILOT OR COPILOT	ROW 1	ROW 2	ROW 3	ROW 4	ROW 5	ROW 6 (MEDEVAC)	ROW 7 (LITTERS)
ARM (INCHES)	227.1	262.0	282.0	320.7	339.8	387.2	270.8	343.6
MOMENT/1000 FOR ONE 240 LB. MAN	55	63	68	77	82	93	65	82
ROW	CHANGE IN MOMENT/1000							
ROW 7 (LITTERS)	27						17	
ROW 6 (MEDEVAC)	10							
ROW 5	30	30	25	16	11			
ROW 4	27	19	14	5				
ROW 3	22	14	9					
ROW 2	13	5						
ROW 1	8							

SAMPLE

NOTE: Add moment change, plus (+) sign, for passenger movement Aft.
Subtract moment change, minus (-) sign, for movement forward.

Example 1 - Passenger moves from Row 1 to Row 5:
Intersect column "Row 1" with line "Row 5" and read change in Moment/1000 of 30. (Use plus (+) sign since this is a movement aft.)

Example 2 - Passenger moves from Row 4 to Row 3:
Intersect line "Row 4" with column "Row 3" and read change in Moment/1000 of 5. (Use minus (-) sign since this is a movement forward.)

(Sheet 21 of 32)

CHART - E
SHEET 23 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

11/14/80

SAMPLE

MISCELLANEOUS EQUIPMENT DATA

CARGO HOOK LOAD

ARM = 353.0 (1)

WEIGHT LBS	MOMENT / 1000	WEIGHT LBS	MOMENT / 1000	WEIGHT LBS	MOMENT / 1000
5	2	1200	424	5200	1836
10	4	1400	494	5400	1906
20	7	1600	565	5600	1977
30	11	1800	635	5800	2047
40	14	2000	706	6000	2118
50	18	2200	777	6200	2189
60	21	2400	847	6400	2259
70	25	2600	918	6600	2330
80	28	2800	988	6800	2400
90	32	3000	1059	7000	2471
100	35	3200	1130	7200	2542
200	71	3400	1200	7400	2612
300	106	3600	1271	7600	2683
400	141	3800	1341	7800	2753
500	176	4000	1412	8000	2824
600	212	4200	1483		
700	247	4400	1553		
800	282	4600	1624		
900	318	4800	1694		
1000	353	5000	1765		

NOTE: (1) Inches from reference datum.

CHART - E
SHEET 24 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

11/14/80

MISCELLANEOUS EQUIPMENT DATA

RESCUE HOIST LOAD ARM = 367.5 (1)				
WEIGHT LBS	MOMENT 1000		WEIGHT LBS	MOMENT 1000
5	2		300	110
10	4		320	118
20	7		340	125
30	11		360	132
40	15		380	140
50	18		400	147
60	22		420	154
70	26		440	162
80	29		460	169
90	33		480	176
100	37		500	184
120	44		520	191
140	51		540	198
160	59		560	206
180	66		580	213
200	74		600	221
220	81			
240	88			
260	96			
280	103			

NOTE: (1) Inches from reference datum.

SAMPLE

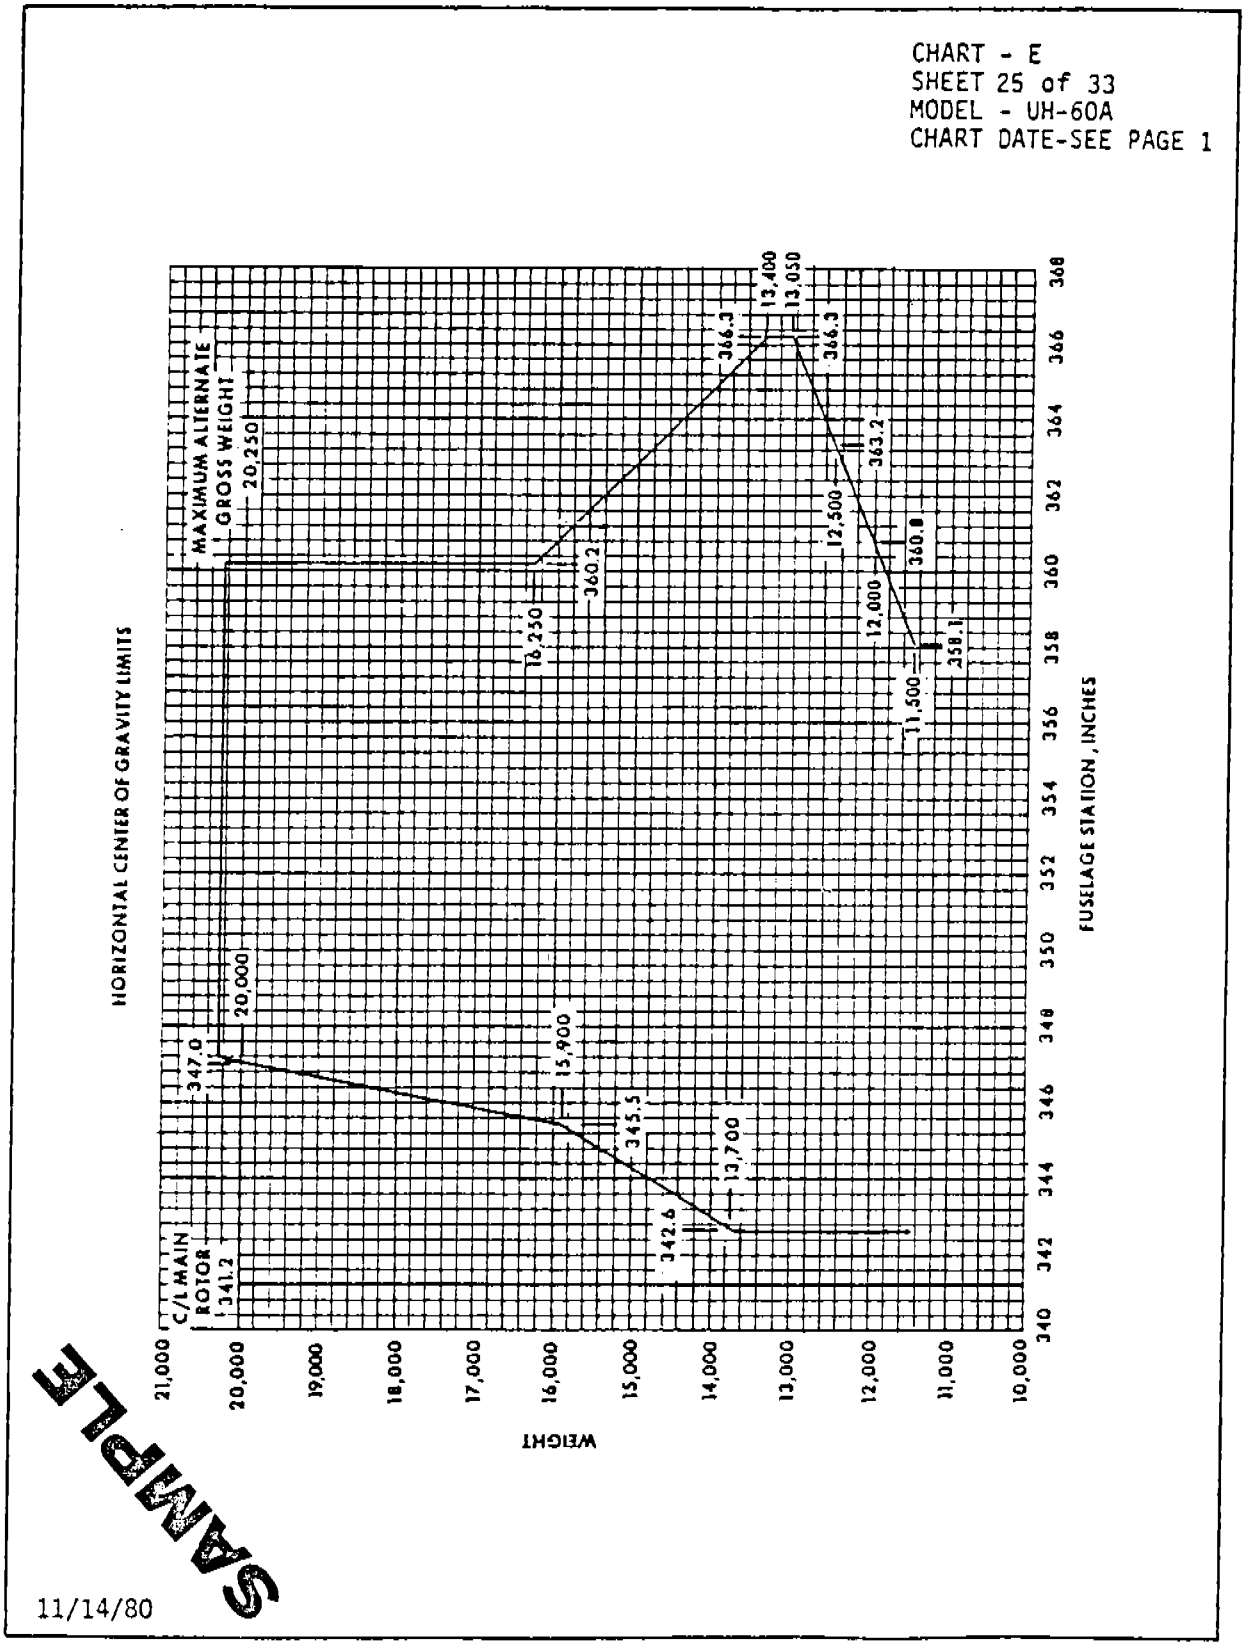

CHART - E
SHEET 25 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1
HORIZONTAL CENTER OF GRAVITY LIMITS
FUSELAGE STATION, INCHES
WEIGHT
MAXIMUM ALTERNATE GROSS WEIGHT
20,250
C/L MAIN ROTOR
341.2
347.0
20,000
15,900
345.5
13,700
342.6
16,250
360.2
366.3
13,400
13,050
366.3
12,500
363.2
12,000
360.8
11,500
358.1
SAMPLE
11/14/80

CHART - E
SHEET 26 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

CENTER OF GRAVITY TABLE

GROSS WEIGHT (POUNDS)	FORWARD LIMIT (SEE NOTE)	FUSELAGE STATION										AFT LIMITS (SEE NOTE)
		344	346	348	350	352	354	356	358	360	362	
		MOMENT/1000										
11500	3940	3956	3979	4002	4025	4048	4071	4094				4118
11550	3957	3973	3996	4019	4043	4066	4089	4112				4137
11600	3974	3990	4014	4037	4060	4083	4106	4130				4160
11650	3991	4008	4031	4054	4078	4101	4124	4147				4181
11700	4008	4025	4048	4072	4095	4118	4142	4165	4189			4200
11750	4026	4042	4066	4089	4113	4136	4160	4183	4207			4221
11800	4043	4059	4083	4106	4130	4154	4177	4201	4224			4243
11850	4060	4076	4100	4124	4148	4171	4195	4219	4242			4266
11900	4077	4094	4117	4141	4165	4189	4213	4236	4260			4288
11950	4094	4111	4135	4159	4183	4206	4230	4254	4278			4309
12000	4111	4128	4152	4176	4200	4224	4248	4272	4296			4330
12050	4128	4145	4169	4193	4218	4242	4266	4290	4314	4338		4350
12100	4145	4162	4187	4211	4235	4259	4283	4308	4332	4356		4371
12150	4163	4180	4204	4228	4253	4277	4301	4325	4350	4374		4392
12200	4180	4197	4221	4246	4270	4294	4319	4343	4368	4392		4409
12250	4197	4214	4239	4263	4288	4312	4337	4361	4386	4410		4435
12300	4214	4231	4256	4280	4305	4330	4354	4379	4403	4428		4458
12350	4231	4248	4273	4298	4323	4347	4372	4397	4421	4446		4478
12400	4248	4266	4290	4315	4340	4365	4390	4414	4439	4464		4499
12450	4265	4283	4308	4333	4358	4382	4407	4432	4457	4482		4518
12500	4283	4300	4325	4350	4375	4400	4425	4450	4475	4500	4525	4540
12550	4300	4317	4342	4367	4393	4418	4443	4468	4493	4518	4543	4563
12600	4317	4334	4360	4385	4410	4435	4460	4486	4511	4536	4561	4584

NOTE: FORWARD AND AFT LIMITS
SEE PAGE 25 OF 33 FOR FUSELAGE STATIONS

SAMPLE

12/2/82

SAMPLE

CHART - E
SHEET 27 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

CENTER OF GRAVITY TABLE

GROSS WEIGHT (POUNDS)	FORWARD LIMIT (SEE NOTE)	FUSELAGE STATION										AFT LIMITS (SEE NOTE)
		344	346	348	350	352	354	356	358	360	362	
		MOMENT/1000										
12650	4334	4352	4377	4402	4428	4453	4478	4503	4529	4554	4579	4604
12700	4351	4369	4394	4420	4445	4470	4496	4521	4547	4572	4597	4625
12750	4368	4386	4412	4437	4463	4488	4514	4539	4565	4590	4616	4649
12800	4385	4403	4429	4454	4480	4506	4531	4557	4582	4608	4634	4672
12850	4402	4420	4446	4472	4498	4523	4549	4575	4600	4626	4652	4693
12900	4420	4438	4463	4489	4515	4541	4567	4592	4618	4644	4670	4716
12950	4437	4455	4481	4507	4533	4558	4584	4610	4636	4662	4688	4736
13000	4454	4472	4498	4524	4550	4576	4602	4628	4654	4680	4706	4759
13050	4471	4489	4515	4541	4568	4594	4620	4646	4672	4698	4724	4780
13100	4488	4506	4533	4559	4585	4611	4637	4664	4690	4716	4742	4799
13150	4505	4524	4550	4576	4603	4629	4655	4681	4708	4734	4760	4817
13200	4522	4541	4567	4594	4620	4646	4673	4699	4726	4752	4778	4835
13250	4539	4558	4585	4611	4638	4664	4691	4717	4744	4770	4797	4853
13300	4557	4575	4602	4628	4655	4682	4708	4735	4761	4788	4815	4872
13350	4574	4592	4619	4646	4673	4699	4726	4753	4779	4806	4833	4890
13400	4591	4610	4636	4663	4690	4717	4744	4770	4797	4824	4851	4908
13450	4608	4627	4654	4681	4707	4734	4761	4788	4815	4842	4869	4925
13500	4625	4644	4671	4698	4725	4752	4779	4806	4833	4860	4887	4942
13550	4642	4661	4688	4715	4743	4770	4797	4824	4851	4878	4905	4959
13600	4659	4678	4706	4733	4760	4787	4814	4842	4869	4896	4923	4976
13650	4676	4696	4723	4750	4778	4805	4832	4859	4887	4914	4941	4992
13700	4694	4713	4740	4768	4795	4822	4850	4877	4905	4932	4959	5009
13750	4712	4730	4758	4785	4813	4840	4868	4895	4923	4950	4978	5027
13800	4730	4747	4775	4802	4830	4858	4885	4913	4940	4958	4996	5042
13850	4748	4764	4792	4820	4848	4875	4903	4931	4958	4986	5014	5061
13900	4766	4782	4809	4837	4865	4893	4921	4948	4976	5007	5032	5076
13950	4784	4799	4827	4855	4883	4910	4938	4966	4994	5022	5050	5092
14000	4802	4816	4844	4872	4900	4928	4956	4984	5012	5040	5068	5109
14050	4820	4833	4861	4889	4918	4946	4974	5002	5030	5058	5086	5126
14100	4838	4850	4879	4907	4935	4963	4991	5020	5048	5076	5104	5143
14150	4856	4868	4896	4924	4953	4981	5009	5037	5066	5094	5122	5160
14200	4874	4885	4913	4942	4970	4998	5027	5055	5084	5112	5140	5176
14250	4892	4902	4931	4959	4988	5016	5045	5073	5102	5130	5159	5193
14300	4910	4919	4948	4976	5005	5034	5062	5091	5119	5148	5177	5210
14350	4929	4936	4965	4994	5023	5051	5080	5109	5137	5166	5195	5226
14400	4947	4954	4982	5011	5040	5069	5098	5126	5155	5184	5213	5243
14450	4965	4971	5000	5029	5058	5086	5115	5144	5173	5202	5231	5260
14500	4983	4988	5017	5046	5075	5104	5133	5162	5191	5220	5249	5276
14550	5001	5005	5034	5063	5093	5122	5151	5180	5209	5238	5267	5293
14600	5019	5022	5052	5081	5110	5139	5168	5198	5227	5256	5285	5310
14650	5037	5040	5069	5098	5128	5157	5186	5215	5245	5274	5303	5326
14700	5056	5057	5086	5116	5145	5174	5204	5233	5263	5292	5321	5343
14750	5074	5074	5104	5133	5163	5192	5222	5251	5281	5310		5360
14800	5091	5091	5121	5150	5180	5210	5239	5269	5298	5328		5376
14850	5110		5138	5168	5198	5227	5257	5287	5316	5346		5393
14900	5128		5155	5185	5215	5245	5275	5304	5334	5364		5409
14950	5147		5173	5203	5233	5262	5292	5322	5352	5382		5426
15000	5165		5190	5220	5250	5280	5310	5340	5370	5400		5443
15050	5183		5207	5237	5268	5298	5328	5358	5388	5418		5459
15100	5201		5225	5255	5285	5315	5345	5376	5406	5436		5476
15150	5219		5242	5272	5303	5333	5363	5393	5424	5454		5492
15200	5238		5259	5290	5320	5350	5381	5411	5442	5472		5509
15250	5256		5277	5307	5338	5368	5399	5429	5460	5490		5525
15300	5274		5294	5324	5355	5386	5416	5447	5477	5508		5542

NOTE: FORWARD AND AFT LIMITS
SEE PAGE 25 OF 33 FOR FUSELAGE STATIONS

12/2/82

SAMPLE

CHART - E
SHEET 28 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

CENTER OF GRAVITY TABLE

GROSS WEIGHT (POUNDS)	FORWARD LIMIT (SEE NOTE)	FUSELAGE STATION										AFT LIMITS (SEE NOTE)
		344	346	348	350	352	354	356	358	360	362	
		MOMENT/1000										
15350	5292		5311	5342	5373	5403	5434	5465	5495	5526		5558
15400	5310		5328	5359	5390	5421	5452	5482	5513	5544		5575
15450	5329		5346	5377	5408	5438	5469	5500	5531	5562		5591
15500	5347		5363	5394	5425	5456	5487	5518	5549	5580		5608
15550	5365		5380	5411	5441	5474	5505	5536	5567	5598		5624
15600	5384		5398	5429	5460	5491	5522	5554	5585	5616		5641
15650	5402		5415	5446	5478	5509	5540	5571	5603	5634		5657
15700	5420		5432	5464	5495	5526	5558	5589	5621	5652		5673
15750	5438		5450	5481	5513	5544	5576	5607	5639	5670		5690
15800	5457		5467	5498	5530	5562	5593	5625	5656	5688		5706
15850	5475		5484	5516	5548	5579	5611	5643	5674	5706		5723
15900	5493		5501	5533	5565	5597	5629	5660	5692	5724		5739
15950	5511		5519	5551	5583	5614	5646	5678	5710	5742		5755
16000	5529		5536	5568	5600	5632	5664	5696	5728	5760		5772
16050	5546		5553	5585	5618	5650	5682	5714	5746	5778		5788
16100	5564		5571	5603	5635	5667	5699	5732	5764	5796		5804
16150	5581		5588	5620	5653	5685	5717	5749	5782	5814		5821
16200	5599		5605	5638	5670	5702	5735	5767	5800	5832		5837
16250	5617		5622	5655	5688	5720	5753	5785	5818	5850		5853
16300	5634		5640	5672	5705	5738	5770	5803	5835	5868		5871
16350	5652		5657	5690	5723	5755	5750	5821	5853	5886		5889
16400	5669		5674	5707	5740	5773	5806	5838	5871	5904		5907
16450	5687		5692	5725	5758	5790	5823	5856	5889	5922		5925
16500	5704		5709	5742	5775	5808	5841	5874	5907	5940		5943
16550	5722		5726	5759	5793	5826	5859	5892	5925	5958		5961
16600	5740		5744	5777	5810	5843	5876	5910	5943	5976		5979
16650	5757		5761	5794	5828	5861	5894	5927	5961	5994		5997
16700	5775		5778	5812	5845	5878	5912	5945	5979	6012		6015
16750	5792		5796	5829	5863	5896	5930	5963	5997	6030		6033
16800	5810		5813	5846	5880	5914	5947	5981	6014	6048		6051
16850	5828		5830	5864	5898	5931	5965	[illegible]	6032	6066		6069
16900	5845		5847	5881	5915	5949	5983	6016	6050	6084		6087
16950	5863		5865	5899	5933	5966	6000	6034	6068	6102		6105
17000	5880		5882	5916	5950	5984	6018	6052	6086	6120		6123
17050	5898		5899	5933	5968	6002	6036	6070	6104	6138		6141
17100	5916		5917	5951	5985	6019	6053	6088	6122	6156		6159
17150	5933		5934	5968	6003	6037	6071	6105	6140	6174		6177
17200	5951		5951	5986	6020	6054	6089	6123	6158	6192		6195
17250	5968		5969	6003	6038	6072	6107	6141	6176	6210		6213
17300	5986			6020	6055	6090	6124	6159	6193	6228		6231
17350	6004			6038	6073	6107	6142	6177	6211	6246		6249
17400	6021			6055	6090	6125	6160	6194	6229	6264		6267
17450	6039			6073	6108	6142	6177	6212	6247	6282		6285
17500	6057			6090	6125	6160	6195	6230	6265	6300		6304
17550	6074			6107	6143	6178	6213	6248	6283	6318		6322
17600	6092			6125	6160	6195	6230	6266	6301	6335		6340
17650	6109			6142	6178	6213	6248	6283	6319	6353		6358
17700	6127			6160	6195	6230	6266	6301	6337	6372		6376
17750	6145			6177	6213	6248	6284	6319	6355	6390		6394
17800	6162			6194	6230	6266	6301	6337	6372	6408		6412

NOTE: FORWARD AND AFT LIMITS
SEE PAGE 25 OF 33 FOR FUSELAGE STATIONS

12/2/82

CHART - E
SHEET 29 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

SAMPLE

CENTER OF GRAVITY TABLE

GROSS WEIGHT (POUNDS)	FORWARD LIMIT (SEE NOTE)	FUSELAGE STATION										AFT LIMITS (SEE NOTE)
		344	346	348	350	352	354	356	358	360	362	
		MOMENT/1000										
17850	6180			6212	6248	6283	6319	6355	6390	6426		6430
17900	6198			6229	6265	6301	6337	6372	6408	6444		6448
17950	6215			6247	6283	6318	6354	6390	6426	6462		6466
18000	6233			6264	6300	6336	6372	6408	6444	6480		6484
18050	6251			6281	6318	6354	6390	6426	6462	6498		6502
18100	6268			6299	6335	6371	6407	6444	6480	6516		6520
18150	6286			6316	6353	6389	6425	6451	6498	6534		6538
18200	6303			6334	6370	6406	6443	6479	6516	6552		6556
18250	6321			6351	6388	6424	6461	6497	6534	6570		6574
18300	6339			6368	6405	6442	6478	6515	6551	6588		6592
18350	6356			6386	6423	6459	6496	6533	6569	6606		6610
18400	6374			6403	6440	6477	6514	6550	6587	6624		6628
18450	6392			6421	6458	6494	6531	6568	6605	6642		6646
18500	6409			6438	6475	6512	6549	6586	6623	6660		6664
18550	6427			6455	6493	6530	6567	6604	6641	6678		6682
18600	6445			6473	6510	6547	6584	6622	6659	6696		6700
18650	6462			6490	6528	6565	6602	6639	6677	6714		6718
18700	6480			6508	6545	6582	6620	6657	6695	6732		6736
18750	6498			6525	6563	6600	6638	6675	6713	6750		6754
18800	6515			6542	6580	6618	6655	6693	6730	6768		6772
18850	6533			5560	6598	6635	6673	6711	6748	6786		6790
18900	6551			6577	6615	6653	6691	6728	6766	6804		6808
18950	6568			6595	6633	6670	6708	6746	6784	6822		6826
19000	6586			6612	6650	6688	6726	6764	6802	6840		6844
19050	6604			6629	6668	6706	6744	6782	6820	5858		6862
19100	6621			6647	6685	6723	6761	6800	6838	6876		6880
19150	6639			6664	6703	6741	6779	6817	5856	6894		6898
19200	6657			6682	6720	6758	6797	6835	5874	6912		6916
19250	6674			6699	6738	6776	6815	6853	6892	6930		6934
19300	6692			6716	6755	6794	6832	6871	6909	6948		6952
19350	6710			6734	6773	6811	6850	6889	6927	6966		6970
19400	6728			6751	6790	6829	6868	6906	6945	6984		6988
19450	6745			6769	6808	6846	6885	6924	6963	7002		7006
19500	6763			6786	6825	6864	6903	6942	6981	7020		7024
19550	6781			6803	6843	6882	6921	6960	6999	7038		7042
19600	6798			6821	6860	6899	6938	6978	7017	7056		7060
19650	6816			6838	6878	6917	6956	6995	7035	7074		7078
19700	6834			6856	6895	6934	6974	7013	7053	7092		7096
19750	6851			6873	6913	6952	6992	7031	7071	7110		7114
19800	6869			6890	6930	6970	7009	7049	7088	7128		7132
19850	6887			6908	6948	6987	7027	7067	7106	7146		7150
19900	6905			6925	6965	7005	7046	7084	7124	7164		7168
19950	6922			6943	6983	7022	7062	7102	7142	7182		7186
20000	6940			6960	7000	7040	7080	7120	7160	7200		7204
20050	6958			6977	7018	7058	7098	7138	7178	7218		7222
20100	6975			6995	7035	7075	7115	7156	7196	7236		7240
20150	6993			7012	7053	7093	7133	7173	7214	7254		7258
20200	7011			7030	7070	7110	7151	7191	7232	7272		7276
20250	7029			7047	7088	7128	7169	7209	7250	7290		7294

NOTE: FORWARD AND AFT LIMITS
SEE PAGE 25 OF 33 FOR FUSELAGE STATIONS

GROSS WEIGHT LIMITATIONS
TAKE OFF ..... Pounds*
LANDING ..... Pounds*

*SERVICE ACTIVITIES SHALL INSERT, OR SUBSTITUTE, CURRENT FIGURES FROM THE LATEST APPLICABLE FLIGHT HANDBOOK

12/2/82

CHART - E
SHEET 30 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

11/14/80

MAXIMUM PACKAGE SIZE TABLE
CABIN DOORS

WIDTH INCHES	HEIGHT - INCHES				
	50 & UNDER	51	52		
	MAXIMUM LENGTH - INCHES				
46	102	102	102		
48	102	102	102		
50	101	101	101		
52	100	100	100		
54	99	99	99		
56	98	98	98		
58	97	97	97		
60	96	86	96		
62	93	93	93		
64	91	91	91		
66	86	86	86		
68	80	80	80		

NOTE


IF GUNNERS AREA NOT USED, LENGTHS ARE APPROXIMATELY 90% OF TABLE VALUES

SAMPLE

CABIN DOOR - BOTH SIDES

CHART - E
SHEET 31 of 33
MODEL- UH-60A
CHART DATE-SEE PAGE 1

CABIN AND DOOR DIMENSIONS

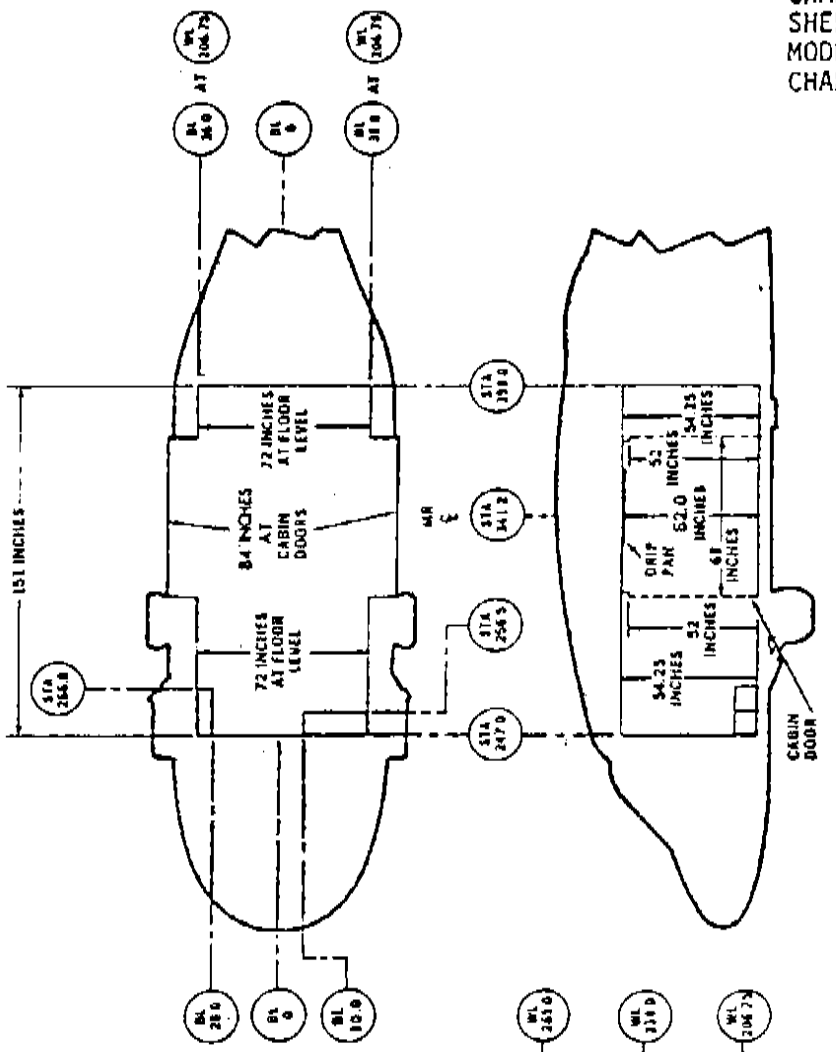

SAMPLE

11/14/80

11/14/80

MISCELLANEOUS DATA

GENERAL AIRCRAFT DIMENSIONS

MAIN ROTOR DIAMETER	53 FT. 8 IN.
TAIL ROTOR DIAMETER	11 FT. 0 IN.
LENGTH - MAXIMUM (ROTORS AND VERTICAL TAIL UNFOLDED)	64 FT. 10 IN.
- ROTORS AND VERTICAL TAIL FOLDED (AIR TRANSPORTABILITY)	41 FT. 4 IN.
- FUSELAGE	50 FT. .75 IN.
WIDTH - MAXIMUM - AT HORIZONTAL TAILS	14 FT. 4 IN.
- AT MAIN WHEELS (AIR TRANSPORTABILITY)	9 FT. 8.1 IN.
- FUSELAGE	7 FT. 9 IN.
HEIGHT - MAXIMUM - AT TAIL ROTOR (TAIL WHEEL STATIC POSITION)	16 FT. 10 IN.
- AT MAIN ROTOR STATION (MAIN WHEELS STATIC POSITION)	11 FT. 9 IN.
- FUSELAGE	5 FT. 9 IN.
- FOR AIR TRANSPORTABILITY	8 FT. 9.0 IN.
WHEEL BASE	28 FT. 11.75 IN.
MAIN LANDING GEAR TREAD	8 FT. 10.2 IN.

SAMPLE

CHART - E
SHEET 32 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

CHART - E
SHEET 33 of 33
MODEL - UH-60A
CHART DATE-SEE PAGE 1

12/2/82

TYPICAL SERVICE LOAD CONDITIONS

ITEM	ARM (NOTE 1)	TROOP ASSAULT MISSION		AEROMEDICAL EVACUATION MISSION		AERIAL RECOVERY MISSION		EXTENDED RANGE MISSION		CARGO MISSION		14 TROOP MISSION	
		WEIGHT LBS	MOMENT 1000	WEIGHT LBS	MOMENT 1000	WEIGHT LBS	MOMENT 1000	WEIGHT LBS	MOMENT 1000	WEIGHT LBS	MOMENT 1000	WEIGHT LBS	MOMENT 1000
PILOT	227.1	235	53	235	53	235	53	235	53	235	53	235	53
CO-PILOT	227.1	235	53	235	53	235	53	235	53	235	53	235	53
CREW CHIEF/GUNNER	282.0	255	72	0	0	255	72	255	72	255	72	255	72
MEDICAL ATTENDANT (2)	270.8			400	108								
TROOPS (11)	346.6	2640	915										
TROOPS (14)	335.4											3360	1127
LITTER PATIENTS (4)	343.6			1060	364								
FUEL – INTERNAL	420.8	2064	868	2338	984	2338	984	2338	984	2338	984	2338	984
– AUXILIARY	322.4							4953	1597				
CARGO – INTERNAL	343.8									2797	959		
– CARGO HOOK	353.8					6479	2287						
GUNS	276.8	85	25	85	25							85	25
AMMUNITION (1100 ROUNDS)	256.1	72	18	72	18							72	18
ADD 3 TROOP SEATS	294.6											48	14
STOW TROOP SEATS (NOTE 2)				10 SEATS	11			12 SEATS	17	12 SEATS	17		
TOTALS		5586	2004	4425	1616	9542	3449	8016	2776	5860	2130	6628	2346

SAMPLE

NOTES
1 INCHES FROM REFERENCE DATUM.
2 STOW TROOP SEATS IN COMPARTMENT F, ABOVE FUEL CELLS.

APPENDIX A
REFERENCES

AR 95-1 ..... Flight Regulations

AR 95-23 ..... Unmanned Aircraft System Flight Regulations

AR 385-10 ..... The Army Safety Program

DD Form 365 ..... Weight and Balance Personnel, Record of

DA Form 2408-5 ..... Equipment Modification Record

DA Form 2408-5-1 ..... Equipment Modification Record (Component)

DA Form 2408-13 ..... Aircraft Status Information Record

DA Form 2408-13-1 ..... Aircraft Inspection and Maintenance Record

DA Form 2408-14 ..... Uncorrected Fault Record

DA PAM 27-162 ..... Claims Procedures

DA PAM 738-751 ..... Functional Users Manual for the Army Maintenance Management System – Aviation

DD Form 365-1 ..... Weight Checklist Record, Chart A – Basic

DD Form 365-2 ..... Weighing Record, Form B – Aircraft

DD Form 365-3 ..... Weight and Balance Record, Chart C – Basic

DD Form 365-4 ..... Weight and Balance Clearance Form F – Transport/Tactical

NAVAIR 01-1B-50 ..... Handbook of Weight and Balance for Models S-61A and S-61V

SAWE RP#7 ..... Society of Allied Weight Engineers (SAWE), Recommended Practice Number 7 (RP#7), Mass Properties Management and Control for Military Aircraft

TM 55-1500-342-23 ..... Army Aviation Maintenance Engineering Manual for Weight and Balance

TB 43-180 ..... Calibration and Repair Requirements for the Maintenance of Army Material

TB 750-25 ..... Maintenance of Supplies and Equipment: Army Test, Measurement and Diagnostic Equipment (TMDE) Calibration and Repair Support (C&RS) Program

APPENDIX B
EXAMPLE CHARTS AND FORMS

B-1. The following examples represent the proper completion and use of the AWBS charts and forms as shown in Figures B-1 through B-9. The AWBS charts and forms are equivalent of the DD 365 series.

B-2. On 7 July 2005, a Sikorsky UH-60L, serial number 0518105 received a production inventory and weighing under the responsibility of Mr. Roy Smith (Figure B-1) IAW the other figure references listed. Mr. Smith completed the first check mark column of the Chart A (Figure B-2), derived the basic weight condition of 11,636 pounds, 358.61" Arm, and 4172770.4 Moment (Figure B-3) from weighing, and entered the Basic Weight, Arm, and Moment condition into the Chart C (Figure B-4). Note that because the aircraft was weighed completely dry (no trapped or unusable fuel) both Trapped Fuel and Unusable Fuel was added to COLUMN II on the DD Form 365-2, Form B- Aircraft Weighing Record. Trapped and unusable fuel is part of Basic Weight and must be entered in the calculations of the aircraft's Basic Weight, Arm, and Moment.

B-3. Later the same day, SSG King, from Ft. Bragg, NC signed for the aircraft. SSG King is the Unit Weight and Balance Technician and was given the responsibility for maintaining this aircraft's Weight and Balance Handbook (Figure B-1). The next morning, he performed the acceptance inventory and completed the second check mark column of the Chart A (Figure B-2). A new Form F was assigned to aircraft 105 (Figure B-5).

B-4. On 9 December 2005, equipment changes were made (Figure B-4). Results of the additions were made in the Chart A (Figure B-2). Since the aircraft's Basic Weight change was more than +/- 3/10 of 1 percent and/or +/- 0.3 inches change of Basic CG, all applicable Form F's were required to be updated.

B-5. Using the aircraft's operators manual-10, an additional Form F (Figure B-6) was completed on 18 May 2006 for a "Combat Troop Infil" mission. A takeoff condition with two pilots, two crew chiefs, flight bags, fly-away gear, survival kits, extra food and water, machine guns, ammunition, main fuel tanks full, and 12 combat soldiers was calculated and found to be NOT WITHIN the prescribed weight and cg limits. The aft cg was calculated to exceed the permitted limits. SSG King calculated that 90 pounds of fuel must be burned prior to takeoff in order to stay within the permitted limits. SSG King also recommended that actual Crew Weights be used due to the sensitivity of the aft cg condition. This information was entered in the REMARKS section of the Form F along with the TAXI FUEL Block. The pilot doors were removed that resulted in a temporary equipment change as noted in the CORRECTIONS table for the Form F. The temporary equipment changes were also listed on the aircraft's forms and records IAW DA PAM 738–751. For landing condition, the loads of usable fuel and 12 combat soldiers were consumed/expended. The estimated LANDING CONDITION was calculated and found to be within the prescribed weight and cg limits (Figure B-6).

B-6. Unit pilots reported unsatisfactory flight characteristics on 3 June 2006 of which the cause could not be satisfactory identified. CW3 Neal, the unit maintenance officer directed troubleshooting procedures be performed. No findings were noted. CW3 Neal submitted a work order for the aircraft to be reweighed. The aircraft was reweighed on 7 June 2006 (Figure B-7). The weighing inventory was performed using the third record of checking column on the Chart A (Figure B-2). The new inventory was compared with the last completed inventory, noting the changes of items installed in the aircraft. The Chart C was reviewed to ensure that the weight and moment corrections were made for those items added and removed since the last inventory, using dates in the Chart A items and location columns as an aid in locating the item on the Chart C. After verifying that the correct Chart C entry had been made, a check was placed in the third record of checking Chart C ENTRY column on the Chart A. The weighing was accomplished using jacks and load cells. The dimensions E and F were taken from the applicable maintenance manual. The aircraft was refueled using the gravity open-port method. The aircraft was level, in an enclosed hanger with all fans/ventilation systems turned off. The new basic weight condition of 11,664 pounds, 355.3 inches Arm and 4145.2 Moment/1000 was derived and entered into Chart C (Figure B-4).

B-7. On 17 October 2006, the aircraft had MWO 1-1520-237-23 AWIS installed. The Chart A and C were updated as instructed in the modification work order (Figures B-8 and B-9).

RECORD OF WEIGHT AND BALANCE PERSONNEL

MDS: UH-60L

SERIAL NO: 0518105

Last Name	First Name	M	Grade, Rate, or Rank	Where Qualified	When Qualified	Station	Date Assigned	Date Relieved
Smith	Roy		Civ	Redstone Arsenal	2004/05/03	Sikorsky Aircraft	2004/10/25	2005/07/07
King	Michael	G	SSG	USAALS, Ft Eustis	2004/06/03	Ft Bragg, NC	2005/07/07	2006/06/07
Williams	Kevin		SGT	USAALS, Ft Eustis	2005/12/19	Ft Bragg, NC	2006/06/07	2006/06/07
King	Michael	G	SSG	USAALS, Ft Eustis	2004/06/03	Ft Bragg, NC	2006/06/07	

AWBS 9.2

Page 1 of 1

Figure B-1. Example AWBS Record of Weight and Balance Personnel

CHART A - BASIC WEIGHT CHECKLIST RECORD

COMPARTMENT: A - ELECTRONICS COMPARTMENT STA 162 - 204

MDS: UH-60L
SERIAL NO: 0518105
CONSTANT: 1000

(060607) FT BRAGG, NC
(050708) Sikorsky Aircraft
(050707) Sikorsky Aircraft
4.
5.
6.
7.
8.
9.
10.

Item Number	Item Description	Weight	H. Arm	H. Moment (Simp)	In A/C	Man. Inv.	Date	060607	050708	050707	4.	5.	6.	7.	8.	9.	10.
A -000.99	NOSE DOOR, UNDERSIDE , FORWARD							.	.	.	.	.	.	.	.	.	.
A -001.00	RADAR RECEIVER R-2218/APR-39(V)	2.0	163.80	0.3	☒		2006/06/07	I	O	O	.	.	.	.	.	.	.
A -001.99	LOWER SHELF WL - 215							.	.	.	.	.	.	.	.	.	.
A -002.00	CIS PROCESSOR CP 2036/A	6.0	175.00	1.0	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -003.00	COMPUTER KIT-1C/TSEC	8.0	176.30	1.4	☒		2006/06/07	I	O	O	.	.	.	.	.	.	.
A -004.00	SIGNAL DATA CONVERTER CV-3338A/ASN-128B	14.0	177.00	2.4	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -005.00	SIGNAL DATA CONVERTER HUD CV-4229V7/AVS-7(V)	13.0	177.50	2.3	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -006.00	DISPLACEMENT GYRO CONTROL, LHS CN-1314/A (9000C)	5.0	178.60	0.9	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -007.00	DISPLACEMENT GYRO CONTROL, RHS CN-1314/A (9000C)	5.0	178.60	0.9	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -008.00	DIGITAL PROCESSOR CP-1597A/APR-39A(V)	6.0	194.00	1.1	☒		2006/06/07	I	O	O	.	.	.	.	.	.	.
A -009.00	SAS AMPLIFIER 70901-02908	3.0	198.30	0.6	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -010.00	RECEIVER R-2594/ARN-147(V)	7.0	204.00	1.5	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -010.99	CANTED BULKHEAD STA 185							.	.	.	.	.	.	.	.	.	.
A -011.00	DIRECTION GYRO CN-998(B)/ASN-43	6.0	182.00	1.0	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -012.00	RECEIVER R-2382/ARN-149(V)1	5.0	183.50	1.0	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -012.99	UPPER SHELF WL - 226							.	.	.	.	.	.	.	.	.	.
A -013.00	SECURITY SET, LHS TSEC/KY-58	5.0	190.20	0.9	☒		2006/06/07	I	O	O	.	.	.	.	.	.	.
A -014.00	SECURITY SET, CENTER TSEC/KY-58	5.0	190.20	0.9	☒		2006/06/07	I	O	O	.	.	.	.	.	.	.
A -015.00	SECURITY SET, RHS TSEC/KY-58	5.0	190.20	0.9	☒		2006/06/07	I	O	O	.	.	.	.	.	.	.
A -016.00	SIGNAL DATA CONVERTER, FWD INSTL 70450-01916	10.0	200.70	1.9	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
A -017.00	SIGNAL DATA CONVERTER, AFT INSTL 70450-01916	10.0	205.80	2.0	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.

AWBS 9.2

Page 1 of 1

Figure B-2. Example AWBS Chart A

UH-60L 0518105

FORM B

Page 1/2

FORM B - AIRCRAFT WEIGHING RECORD				3 - POINT (TAIL)	
DATE WEIGHED	2005/07/07	MODEL/DESIGN	UH-60L	SERIAL NUMBER	0518105
PLACE WEIGHED	SAC, Stratford, CT	TECHNICIAN	Roy Smith	DUTY PHONE	203-684-4008

REACTION	SCALE READING	CORRECTIONS	NET WEIGHT	HOR. ARM	HOR. MOM	LAT. ARM	LAT. MOM
LEFT MAIN	4865.0		4865.0	297.20	1445878.0		
RIGHT MAIN	4672.0		4672.0	297.20	1388518.4		
TAIL	2070.0		2070.0	640.70	1326249.0		
TOTALS	11607.0		11607.0	358.46	4160645.4		

HORIZONTAL MEASUREMENTS

B = 50.20 Distance from the jig point to the center line of the main reactions
I = 247.00 Distance from the reference datum line to the jig point
E = 297.20 Distance from the reference datum line to the center line of the main reactions
D = 343.50 Distance between the main and the tail reaction
F = 640.70 Distance from the reference datum line to the center line of the tail reaction

LATERAL MEASUREMENTS

LM = _____ Distance from the lateral reference datum line to the Left Main reaction
RM = _____ Distance from the lateral reference datum line to the Right Main reaction
NT = _____ Distance from the lateral reference datum line to the Tail reaction

ADJUSTMENTS		NET WEIGHT	H. ARM	H. MOMENT	L. ARM	L. MOMENT
Level Weigh - No Correction						
Total (As Weighed Above)		11607.0	358.46	4160645.4		
Total of Column I (page 2)	-					
Total of Column II (page 2)	+	29.0	418.10	12125.0		
BASIC AIRCRAFT		11636.0	358.61	4172770.4		

SIMPLIFIED HORIZONTAL MOMENT 4172.8 | SIMPLIFIED LATERAL MOMENT | CONSTANT 1000

SCALE

SCALE TYPE: Portable Platform

SERIAL NUMBER: 123-A, 123-B, & 123-C

CALIBRATION ACCURACY:

CALIBRATION DATE: 2004/08/10

REACTIONS USED

Fwd Reactions - Main Wheels
Aft Reaction - Tail Wheel

CORRECTIONS						
REACTION	CALIB	SCALE	TEMP	EQUIP	OTHER	TOTAL
LEFT MAIN						
RIGHT MAIN						
TAIL						

REMARKS

Acft washed, dry, fuel system empty, weighed in level conditon, aircaft weighed at 0 degrees nose up attitude, inside enclosed hanger, using platform scales. Scale Settings: Altitude: 100' and Latitude: 41 degrees

Figure B-3. Example AWBS Form B (Sheet 1 of 2)

COLUMN I					
Items Weighed But Not Part of Basic Weight	WEIGHT	HOR. ARM	HOR. MOM	LAT. ARM	LAT. MOM
FUEL					
TOTAL of Items Weighed But Not Part of Basic Weight					

COLUMN II					
Basic Weight Items Not in Aircraft When Weighed	WEIGHT	HOR. ARM	HOR. MOM	LAT. ARM	LAT. MOM
Trapped fuel	12.0	414.00	4968.0		
Unusable Fuel, Main Tanks	17.0	421.00	7157.0		
TOTAL Basic Weight Items Not in Aircraft When Weighed	29.0	418.10	12125.0		

Figure B-3. Example AWBS Form B (Sheet 2 of 2)

CHART C - BASIC WEIGHT AND BALANCE RECORD

MDS: UH-60L SERIAL NO: 0518105 CONSTANT: 1000

Date	Act.	Item Number	Description	Weight	H. Arm	H. Moment (Simp)	Basic Weight	Basic H. Arm	Basic H. Moment (Simp)
2005/07/07	I		Calculated Weight and Moment per Inventory Completed at Sikorsky Aircraft					358.61	
2005/07/07	W		BASIC A/C, WEIGHED AT : SAC, Stratford, CT	11636.0	358.61	4172.8	11636.0	358.61	4172.8
2005/07/08	I		Calculated Weight and Moment per Inventory Completed at Sikorsky Aircraft				11636.0	358.61	4172.8
2005/12/09	A	A -003.00	COMPUTER KIT-1C/TSEC	8.0	176.30	1.4	11644.0	358.48	4174.2
2005/12/09	A	A -008.00	DIGITAL PROCESSOR CP-1597A/APR-39A(V)	6.0	194.00	1.1	11650.0	358.40	4175.3
2005/12/09	A	A -013.00	SECURITY SET, LHS TSEC/KY-58	5.0	190.20	0.9	11655.0	358.32	4176.2
2005/12/09	A	A -014.00	SECURITY SET, CENTER TSEC/KY-58	5.0	190.20	0.9	11660.0	358.25	4177.2
2005/12/09	A	A -015.00	SECURITY SET, RHS TSEC/KY-58	5.0	190.20	0.9	11665.0	358.17	4178.1
2005/12/09	A	C -027.00	MACHINE GUN MOUNT ARM, RHS M60D	11.0	280.00	3.1	11676.0	358.10	4181.1
2005/12/09	A	C -026.00	MACHINE GUN MOUNT ARM, LHS M60D	11.0	280.00	3.1	11687.0	358.02	4184.2
2005/12/09	A	A -001.00	RADAR RECEIVER R-2218/APR-39(V)	2.0	163.80	0.3	11689.0	357.99	4184.5
2006/06/07	I		Calculated Weight and Moment per Inventory Completed at FT BRAGG, NC				11689.0	357.99	4184.5
2006/06/07	W		BASIC A/C, WEIGHED AT : Ft Bragg, NC	11664.0	355.39	4145.2	11664.0	355.39	4145.2

H = Header
A = Addition
S = 180 Day

I = Inventory
R = Removal
W = Weighing

Certified Copy As Of 2006/06/07

Weight & Balance Technician

06/07/06 10:05:31 AWBS 9.2 Page 1

Figure B-4. Example AWBS Chart C

UH-60L 105 Basic UH-60L 0518105

WEIGHT AND BALANCE CLEARANCE FORM F - TRANSPORT

LEMAC	0.00		
MAC	0.00		
Constant	1000.00		
DATE: 2005/07/08	MDS: UH-60L	FROM: AS REQUIRED	Station: Ft Bragg, NC
Mission: TRAINING	SERIAL NO: 0518105	TO: AS REQUIRED	Pilot: AS ASSIGNED

REMARKS

REF	ITEM	WEIGHT	H. Mom/
1	Basic Aircraft(From Chart C)	11689.0	4184.5
3	Crew [Pilots (2 ea)]	400.0	90.8
4	Crew Bags [Pilots Flt Bags (2 ea)]	20.0	5.0
5	Steward Equip [CE (1 ea)]	200.0	56.4
6	Emerg Equip [CE Flt Bag (1 ea)]	10.0	2.5
7	Extra Equip [Tool Box]	45.0	11.9
8	Survival Kits, Hot-Weather (2 ea)	60.0	15.9
	Fly-Away Gear	8.0	2.7
	Chocks, Wooden	12.0	3.1
	Other Subtotaled Load Items	82.0	21.5
	Corrections	0.0	0.0
9	OPERATING WEIGHT	12526.0	4394.4
10	Int / Main Fuel (359 Gal)	2405.0	1011.9
	Ext / Aux Fuel (0 Gal)	0.0	0.0
12	TOTAL AIRCRAFT WEIGHT	14931.0	5406.3

CORRECTIONS	Weight	H. Mom/
Total Corrections	0.0	0.0

EXPENDABLES	WEIGHT	H. Mom/
Total Expendables	0.0	0.0

DISTRIBUTION OF ALLOWABLE LOAD

13

LIMITATIONS			
Ramp Weight vs Limit	14931.00	<	22000.00
Takeoff Weight vs Limit	14931.00	<	22000.00
Landing Weight vs Limit	12826.00	<	22000.00
Zero Fuel Weight vs Limit			
Load vs Max Allowable Load	0.00	<	7069.00
Remaining Allowable Load	7069.00		

CG LIMITS	FWD	CURRENT	AF
Ramp CG (Gear Down)			
Takeoff CG (Gear Down)	344.30	< 362.09 <	365.40
Takeoff CG (Gear Up)			
Landing CG (Gear Up)			
Landing CG (Gear Down)	342.60	< 352.46 <	365.00
Zero Fuel CG (Gear Down)			

LATERAL LIMITS	LT	CURRENT	RT
Lateral Ramp (Inches)			
Lateral Takeoff (Inches)			
Lateral Landing (Inches)			

16	RAMP WEIGHT	14931.0	5406.3
17	RAMP CG (GD) (Inches)		362.09
18	TAXI FUEL (0 Gal)	0.0	0.0
19	TAKEOFF WEIGHT	14931.0	5406.3
20	TAKEOFF CG (GD) (Inches)		362.09
	Expendable Fuel at Takeoff	-2405.0	-1011.9
21	ZERO FUEL WEIGHT	12526.0	4394.4
22	LESS EXPENDABLES / AIR DROP	0.0	0.0
23	EST LANDING FUEL (45 Gal)	300.0	126.2
24	EST LANDING WEIGHT	12826.0	4520.6
25	EST LANDING CG (GD) (Inches)		352.46

COMPUTED BY SIGNATURE
SSG King, Mike
WEIGHT & BALANCE AUTHORITY
SSG King, Mike
PILOT SIGNATURE

1/2

AWBS Form F 9.2

Figure B-5. Example AWBS Form F (Sheet 1 of 2)

UH-60L 105 Basic UH-60L 0518105

OPERATING WEIGHT ITEMS CONTINUED FROM PAGE 1			
Operating Weight Items	WEIGHT	H. Mom/	
MREs, 1 case	34.0	9.0	
Water Container, 5-Gallons	48.0	12.5	
Total Operating Weight Items	162.0	43.2	

2/2

AWBS Form F 9.2

Figure B-5. Example AWBS Form F (Sheet 2 of 2)

UH-60L 105 Combat Troop Infil

UH-60L 0518105

WEIGHT AND BALANCE CLEARANCE FORM F - TRANSPORT

LEMAC	0.00		
MAC	0.00		
Constant	1000.00		
DATE: 2005/07/08	MDS: UH-60L	FROM: AS REQUIRED	Station: Ft Bragg, NC
Mission: TRAINING	SERIAL NO: 0518105	TO: AS REQUIRED	Pilot: AS ASSIGNED

REMARKS

MUST BURN 90 LBS FUEL PRIOR TO TAKEOFF TO PREVENT EXCEEDING AFT CG LIMITS
RECOMMEND USING ACTUAL CREW WEIGHTS

CORRECTIONS	Weight	H. Mom/
Equipment Corrections	0.0	0.0
Pilot Doors, LH & RH Rmvd (18 May 08)	-64.0	14.5
Total Corrections	-64.0	14.5

EXPENDABLES	WEIGHT	H. Mom/
Combat Troop Cdr, Row 2	240.0	67.7
Combat Troops, Row 3 (3 ea)	720.0	230.9
Combat Troops, Row 4 (4 ea)	960.0	326.2
Combat Troops, Row 5 (4 ea)	960.0	371.7
Total Expendables	2880.0	996.5

LIMITATIONS			
Ramp Weight vs Limit	18073.00	<	22000.00
Takeoff Weight vs Limit	17983.00	<	22000.00
Landing Weight vs Limit	13088.00	<	22000.00
Zero Fuel Weight vs Limit			
Load vs Max Allowable Load	2880.00	<	6807.00
Remaining Allowable Load	3927.00		

CG LIMITS	FWD	CURRENT	AF
Ramp CG (Gear Down)			
Takeoff CG (Gear Down)	346.00 <	359.69 <	362.80
Takeoff CG (Gear Up)			
Landing CG (Gear Up)			
Landing CG (Gear Down)	342.60 <	353.30 <	366.30
Zero Fuel CG (Gear Down)			

LATERAL LIMITS	LT	CURRENT	RT
Lateral Ramp (Inches)			
Lateral Takeoff (Inches)			
Lateral Landing (Inches)			

DISTRIBUTION OF ALLOWABLE LOAD

REF	ITEM	WEIGHT	H. Mom/
1	Basic Aircraft(From Chart C)	11689.0	4184.5
3	Crew [Pilots (2 ea)]	400.0	90.8
4	Crew Bags [Pilots Flt Bags (2 ea)]	20.0	5.0
5	Steward Equip [CE (2 ea)]	400.0	112.8
6	Emerg Equip [CE Flt Bag (2 ea)]	20.0	5.0
7	Extra Equip [Tool Box]	45.0	11.9
8	Survival Kits, Hot-Weather (2 ea)	60.0	15.9
	Fly-Away Gear	8.0	2.7
	Chocks, Wooden	12.0	3.1
	Other Subtotaled Load Items	198.0	51.5
	Corrections	-64.0	14.5
9	OPERATING WEIGHT	12788.0	4497.8
10	Int / Main Fuel (359 Gal)	2405.0	1011.9
	Ext / Aux Fuel (0 Gal)	0.0	0.0
12	TOTAL AIRCRAFT WEIGHT	15193.0	5509.7
13	Combat Troop Cdr, Row 2	240.0	67.7
	Combat Troops, Row 3 (3 ea)	720.0	230.9
	Combat Troops, Row 4 (4 ea)	960.0	326.2
	Combat Troops, Row 5 (4 ea)	960.0	371.7
16	RAMP WEIGHT	18073.0	6506.2
17	RAMP CG (GD) (Inches)		360.00
18	TAXI FUEL (13 Gal)	-90.0	-37.9
19	TAKEOFF WEIGHT	17983.0	6468.3
20	TAKEOFF CG (GD) (Inches)		359.69
	Expendable Fuel at Takeoff	-2315.0	-974.0
21	ZERO FUEL WEIGHT	15668.0	5494.3
22	LESS EXPENDABLES / AIR DROP	-2880.0	-996.5
23	EST LANDING FUEL (45 Gal)	300.0	126.2
24	EST LANDING WEIGHT	13088.0	4624.0
25	EST LANDING CG (GD) (Inches)		353.30

COMPUTED BY SIGNATURE
SSG King, Mike

WEIGHT & BALANCE AUTHORITY
SSG King, Mike

PILOT SIGNATURE

1/2

AWBS Form F 9.2

Figure B-6. Example AWBS Form F (Sheet 1 of 2)

UH-60L 105 Combat Troop Infil UH-60L 0518105

OPERATING WEIGHT ITEMS CONTINUED FROM PAGE 1			
Operating Weight Items	WEIGHT	H. Mom/	
MREs, 1 case	34.0	9.0	
Water Container, 5-Gallons	46.0	12.5	
M-60D Machine Gun Assy (2 ea)	64.0	17.0	
M-60D Ammo (800 Rounds Stowed)	52.0	13.0	
Total Operating Weight Items	278.0	73.2	

AWBS Form F 9.2

Figure B-6. Example AWBS Form F (Sheet 2 of 2)

UH-60L 0518105

FORM B

FORM B - AIRCRAFT WEIGHING RECORD						3 - POINT (TAIL)	
DATE WEIGHED	2006/06/07	MODEL/DESIGN		UH-60L	SERIAL NUMBER		0518105
PLACE WEIGHED	Ft. Bragg, NC	TECHNICIAN		Kevin Williams	DUTY PHONE		910-387-3495
REACTION	SCALE READING	CORRECTIONS	NET WEIGHT	HOR. ARM	HOR. MOM	LAT. ARM	LAT. MOM
LEFT MAIN	4646.0		4646.0	247.00	1147562.0		
RIGHT MAIN	4732.0		4732.0	247.00	1168804.0		
TAIL	4698.0		4698.0	605.30	2843699.4		
TOTALS	14076.0		14076.0	366.59	5160065.4		

HORIZONTAL MEASUREMENTS

B =		Distance from the jig point to the center line of the main reactions
I =		Distance from the reference datum line to the jig point
E =	247.00	Distance from the reference datum line to the center line of the main reactions
D =		Distance between the main and the tail reaction
F =	605.30	Distance from the reference datum line to the center line of the tail reaction

LATERAL MEASUREMENTS

LM =		Distance from the lateral reference datum line to the Left Main reaction
RM =		Distance from the lateral reference datum line to the Right Main reaction
NT =		Distance from the lateral reference datum line to the Tail reaction

ADJUSTMENTS		NET WEIGHT	H. ARM	H. MOMENT	L. ARM	L. MOMENT
Level Weigh - No Correction						
Total (As Weighed Above)		14076.0	366.59	5160065.4		
Total of Column I (page 2)	-	2412.0	420.80	1014969.6		
Total of Column II (page 2)	+	22.0	353.00	7766.0		
BASIC AIRCRAFT		11686.0	355.37	4152861.8		

SIMPLIFIED HORIZONTAL MOMENT	4152.9	SIMPLIFIED LATERAL MOMENT	CONSTANT	1000

SCALE

SCALE TYPE: GEC

SERIAL NUMBER: I391, I392, I393

CALIBRATION ACCURACY:

CALIBRATION DATE: 2006/04/26

REACTIONS USED

FWD Reactions: Main Jack Points
AFT Reaction: Tail Jack Point

CORRECTIONS

REACTION	CALIB	SCALE	TEMP	EQUIP	OTHER	TOTAL
LEFT MAIN						
RIGHT MAIN						
TAIL						

REMARKS

Acft washed, dry, fuel system full using open-port method, fuel density 6.7 lbs per gal, weighed in level condition, inside enclosed hangar, using jacks/load-cells. Scale Settings: Altitude: 242 feet, Latitude: 35 degrees

Figure B-7. Example AWBS Form B . (Sheet 1 of 2)

UH-60L 0518105

COLUMN I					
Items Weighed But Not Part of Basic Weight	WEIGHT	HOR. ARM	HOR. MOM	LAT. ARM	LAT. MOM
360 Gallons JP-8	2412.0	420.80	1014969.6		
TOTAL of Items Weighed But Not Part of Basic Weight	2412.0	420.80	1014969.6		
COLUMN II					
Basic Weight Items Not in Aircraft When Weighed	WEIGHT	HOR. ARM	HOR. MOM	LAT. ARM	LAT. MOM
Cargo Hook	22.0	353.00	7766.0		
TOTAL Basic Weight Items Not in Aircraft When Weighed	22.0	353.00	7766.0		

Figure B-7. Example AWBS Form B . (Sheet 2 of 2)

CHART A - BASIC WEIGHT CHECKLIST RECORD

COMPARTMENT: E - AFT CARGO COMPARTMENT STA 343 - 398

MDS: UH-60L
SERIAL NO: 0518105
CONSTANT: 1000

(060607) FT BRAGG, NC 6.
(050708) Sikorsky Aircraft 7.
(050707) Sikorsky Aircraft 8.
4. 9.
5. 10.

Item Number	Item Description	Weight	H. Arm	H. Moment (Simp)	In A/C	Man. Inv.	Date	060607	050708	050707	4.	5.	6.	7.	8.	9.	10.
E -001.00	SOUNDPROOFING, CEILING, LHS 70500-02072	5.0	343.50	1.6	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -002.00	SOUNDPROOFING, CEILING, RHS 70500-02072	5.0	343.50	1.8	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -003.00	SUPPORT, UPPER PEDESTAL (MEDEVAC) 70802-12600	11.0	344.00	3.8	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -004.00	PEDESTAL (MEDEVAC 6 MAN) 70802-12300	313.0	344.00	107.7	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -005.00	PEDESTAL (MEDEVAC 4 MAN) 70802-12300	270.0	344.00	92.9	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -006.00	LITTER SUPPORT (MEDEVAC LH UPPER) 70802-12420	81.0	344.00	27.9	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -007.00	LITTER SUPPORT (MEDEVAC LH LOWER) 70802-12420	81.0	344.00	27.9	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -008.00	LITTER SUPPORT (MEDEVAC RH UPPER) 70802-12420	81.0	344.00	27.9	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -009.00	LITTER SUPPORT (MEDEVAC RH LOWER) 70802-12420	81.0	344.00	27.9	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -010.00	TRAPPED FUEL, AUX LINES	9.0	360.00	3.2	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -011.00	RESCUE HOIST, INTERNAL (WITH OIL) 42305R1	181.0	368.00	66.6	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -012.00	ADAPTER PLATE, RESCUE HOIST KIT 70801-02000	19.0	367.50	7.1	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -013.00	SOUNDPROOFING, CEILING 70500-02064	7.0	379.00	2.7	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -014.00	E.S.U. HONEYWELL APU (ALTERNATE) 2118806-2 OR 2118806-1	6.0	384.00	2.3	☐		2006/06/07	O	O	O	.	.	.	.	.	.	.
E -015.00	E.S.U. SUNDSTRAND APU 163290-100	4.0	384.00	1.5	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -015.01	AIRCRAFT INTERFACE UNIT (AIU) P/N 780-2000-001	3.0	386.00	1.2	☒		2006/10/17	.	.	.	.	.	.	.	.	.	.
E -016.00	SIDEWALL SOUNDPROOFING PANEL, LHS 70500-02068	2.0	388.50	0.7	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -017.00	SIDEWALL SOUNDPROOFING PANEL, RHS 70500-02068	2.0	388.50	0.7	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -018.00	TROOP SEAT AFT OUTBOARD LHS 70500-02151	16.0	392.00	6.3	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -019.00	TROOP SEAT AFT INBOARD LHS 70500-02151	16.0	392.00	6.3	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -020.00	TROOP SEAT AFT INBOARD RHS 70500-02151	16.0	392.00	6.3	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -021.00	TROOP SEAT AFT OUTBOARD RHS 70500-02151	16.0	392.00	6.3	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -022.00	PUMP HANDLE, APU STOWED 466536A	1.0	397.00	0.4	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.

AWBS 9.2

Page 1 of 2

Figure B-8. Example AWBS Chart A (Sheet 1 of 2)

CHART A - BASIC WEIGHT CHECKLIST RECORD

COMPARTMENT: E - AFT CARGO COMPARTMENT STA 343 - 398

MDS: UH-60L
SERIAL NO: 0518105
CONSTANT: 1000

(060607) FT BRAGG, NC
(050708) Sikorsky Aircraft
(050707) Sikorsky Aircraft
4.
5.
6.
7.
8.
9.
10.

Item Number	Item Description	Weight	H. Arm	H. Moment (Simp)	In A/C	Man. Inv.	Date	060607	050708	050707	4.	5.	6.	7.	8.	9.	10.
E -023.00	AFT BULKHEAD SOUNDPROOFING, BLANKETS 70500-03050	3.0	398.00	1.2	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -024.00	AFT BULKHEAD SOUNDPROOFING, DOOR, RHS 70500-03050	3.0	398.00	1.2	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.
E -025.00	AFT BULKHEAD SOUNDPROOFING, DOOR, LHS 70500-03050	3.0	398.00	1.2	☒		2006/06/07	I	I	I	.	.	.	.	.	.	.

Figure B-8. Example AWBS Chart A (Sheet 2 of 2)

CHART C - BASIC WEIGHT AND BALANCE RECORD

MDS: UH-60L SERIAL NO: 0518105 CONSTANT: 1000

Date	Act.	Item Number	Description	Weight	H. Arm	H. Moment (Simp)	Basic Weight	Basic H. Arm	Basic H. Moment (Simp)
2005/07/07	I		Calculated Weight and Moment per Inventory Completed at Sikorsky Aircraft					358.61	
2005/07/07	W		BASIC A/C, WEIGHED AT : SAC, Stratford, CT	11636.0	358.61	4172.8	11636.0	358.61	4172.8
2005/07/08	I		Calculated Weight and Moment per Inventory Completed at Sikorsky Aircraft				11636.0	358.61	4172.8
2005/12/09	A	A -003.00	COMPUTER KIT-1C/TSEC	8.0	176.30	1.4	11644.0	358.48	4174.2
2005/12/09	A	A -008.00	DIGITAL PROCESSOR CP-1597A/APR-39A(V)	6.0	194.00	1.1	11650.0	358.40	4175.3
2005/12/09	A	A -013.00	SECURITY SET, LHS TSEC/KY-58	5.0	190.20	0.9	11655.0	358.32	4176.2
2005/12/09	A	A -014.00	SECURITY SET, CENTER TSEC/KY-58	5.0	190.20	0.9	11660.0	358.25	4177.2
2005/12/09	A	A -015.00	SECURITY SET, RHS TSEC/KY-58	5.0	190.20	0.9	11665.0	358.17	4178.1
2005/12/09	A	C -027.00	MACHINE GUN MOUNT ARM, RHS M60D	11.0	280.00	3.1	11676.0	358.10	4181.1
2005/12/09	A	C -026.00	MACHINE GUN MOUNT ARM, LHS M60D	11.0	280.00	3.1	11687.0	358.02	4184.2
2005/12/09	A	A -001.00	RADAR RECEIVER R-2218/APR-39(V)	2.0	163.80	0.3	11689.0	357.99	4184.5
2006/06/07	I		Calculated Weight and Moment per Inventory Completed at FT BRAGG, NC				11689.0	357.99	4184.5
2006/06/07	W		BASIC A/C, WEIGHED AT : Ft Bragg, NC	11664.0	355.39	4145.2	11664.0	355.39	4145.2
2006/10/17	H		*** BEGINNING OF MWO 1-1520-237-23-AWIS						
2006/10/17	A		AIU MOUNTING PLATE ASSY	0.3	386.00	0.1	11664.3	355.39	4145.3
2006/10/17	A		POWER HARNESS ASSY	0.5	310.00	0.2	11664.8	355.38	4145.5
2006/10/17	A		AUDIO HARNESS ASSY	2.0	310.00	0.6	11666.8	355.38	4146.1
2006/10/17	H		*** END OF MWO 1-1520-237-23-AWIS						
2006/10/17	A	E -015.01	AIRCRAFT INTERFACE UNIT (AIU) P/N 780-2000-001	3.0	386.00	1.2	11669.8	355.38	4147.3

H = Header
A = Addition
S = 180 Day

I = Inventory
R = Removal
W = Weighing

Certified Copy As Of 2006/10/17

Weight & Balance Technician

AWBS 9.2

Page 1

Figure B-9. Example AWBS Chart C

GLOSSARY

A

Actual Weight — The weight of a component, subassembly or the entire as determined by actually weighing at least one representative article. Frequently the actual weight for record keeping purposes is an average of several representative articles.

Aft Center Of Gravity Limit — The aft center of gravity limit is the most rearward permissible aircraft center of gravity location for a specific weight and configuration. Center of Gravity limits may be expressed in inches (arm), %MAC, or index.

Air Cargo (CARGO) — Stores, equipment or vehicles, which do not form part of the aircraft, and are either part or all of its payload.

Aircraft Modification — A change in the physical characteristics of aircraft, accomplished either by a change in production specifications or by alteration of items already produced.

Aircraft Reference Axes — A set of three mutually perpendicular reference lines (longitudinal, lateral, and vertical) established to define the basic geometry of a major aircraft component, such as the wing, fuselage or nacelle. Each Model, Design, or Series aircraft have their unique reference axes which must be provided to the customer or user of the aircraft. The fuselage reference system is normally used as the common set of axes in locating the aircraft center of gravity. The aircraft reference system shall be defined early in the aircraft development and is usually located in front of the aircraft and below the static ground level to eliminate the need for negative arms. However, the lateral reference axis is usually located down the centerline of the aircraft to make symmetrical calculations easier.

Aircraft Station — An aircraft station is a position defined by a plane perpendicular to the longitudinal aircraft axis. The number designation of this station signifies its distance from the reference datum. A station forward of the reference datum is negative (-) while a station aft of the reference datum is positive (+).

Aircraft Store — Any device intended for internal or external carriage and mounted on aircraft suspension and release equipment, whether or not the item is intended to be separated in flight from the aircraft. Aircraft stores are classified in two categories of expendable and non–expendable

Aircraft Weighing Record — An Aircraft Weighing Record, DD Form 365-2, is the form used to record data obtained from aircraft actual weighings and to derive the Basic Weight and Moment from the As-Weighed Weight and Moment.

Allowable Gross Weight — The allowable gross weight is the not to be exceeded weight of a loaded aircraft. The aircraft flight manuals (i.e., Operator's Manual and/or Chart E) specify allowable weights for particular configurations or conditions. Some examples are allowable takeoff weight, allowable landing weight, and allowable limiting wing fuel weight.

Arm — An arm is the distance of the center of gravity of an item from a reference datum. When computing arms, note that arms are not additive and must be calculated by dividing the moment (not simplified) by the weight.

Automated FORM F (AFF) Generator — An AFF is an electronic Form F Generator that is used to determine the aircraft weight and center of gravity location for any flight or ground configuration and produce a Form F.

Automated Weight And Balance System (AWBS) — The Automated Weight and Balance System (AWBS) is a system that utilizes a computer to fill out forms similar to the DD 365 series forms. Aircraft weight data is stored in the program and may be updated via the computer, thus reducing mathematical errors and increasing efficiency.

Average Arm — The average arm is the distance from the reference datum to the cg of a group of objects.

Average Weight — The summation of the individual weights divided by the number of the individual weights, i.e., (First Weight + Second Weight/2 = Average Weight).

B

Balance — Balance is a condition of stability, which exists in an aircraft when all weights and forces are acting in such a way as to prevent rotation.

Balance Arm — The balance arm is the arm at which a number of weights could be concentrated to produce the same effect as they produced when separated. The balance arm results from dividing the total moment by the total weight.

Balance Computer — A balance computer is a calculating device, mechanical or electronic, which is used to determine the aircraft center of gravity location for any flight or ground configuration.

Ballast — Ballast is any weight put in an aircraft to balance the aircraft so as to remain within the aircraft permissible center of gravity limits.

Basic Arm — The basic arm is the distance from the reference datum to the aircraft basic weight center of gravity. Basic arm is determined by dividing the aircraft basic moment by the aircraft basic weight.

Basic Index — A basic index is a number, which represents a basic moment on an aircraft load adjuster.

Basic Moment — The basic moment is the sum of the moments of all items included in the aircraft basic weight.

Basic Weight — Basic weight of an aircraft is that weight which includes all hydraulic and oil systems full, trapped and unusable fuel, and all fixed equipment, to which it is only necessary to add the crew, fuel, cargo, and ammunition (if carried) to determine the gross weight for the aircraft. The basic weight varies with structural modifications and changes of fixed aircraft equipment.

Basic Weight and Balance Record — The basic weight and balance record is a continuous series of DD Forms 365-3, referred to as Chart C. It is a continuous and permanent record of aircraft weight, moment, and load adjuster index or center of gravity position.

Basic Weight Checklist Record — The basic weight checklist record is a completed collection of DD Form 365-1, referred to as Chart A. It is a list of equipment by aircraft compartment that is, or can be, installed in the aircraft.

Buttlines — Buttlines are reference locations in the lateral (left or right) direction from the aircraft longitudinal (forward to aft) reference datum, which is usually the aircraft centerline.

C

Calculated Weight — The weight of a component or subassembly, as determined by calculation using engineering data that has completed the design and approval cycle during the detail design phase.

Caution Range — A caution range is a region of a weight and center of gravity diagram, or table, which indicates reduced aircraft capabilities, such as aircraft control or structural limitations.

Center Of Gravity — The center of gravity, cg, is that point at which an item's weight may be assumed to be concentrated and about which the item would balance if suspended. Center of Gravity may be expressed in inches (arm), %MAC, or index.

Centroid Centroid is commonly used as the average arm or geometric center of a compartment.

Chart A See Basic Weight Check List Record.

Chart C See Basic Weight and Balance Record.

Chart E See Loading Data.

Chord A chord is an imaginary straight line joining the leading and trailing edges of an airfoil (such as a wing or tail surface).

Configuration Configuration is a particular arrangement and quantity of structure, systems, internal and external equipment, stores, fuel, and other items, and the positions of such things as wings, slats, flaps, and landing gear.

D

Danger Range A danger range is a region of a weight and center of gravity diagram, or table, within which flight and/or ground operation of an aircraft is not permitted.

Datum SEE REFERENCE DATUM

DD Form 365 See Record of Weight and Balance Personnel.

DD Form 365-1 See Basic Weight Checklist Record.

DD Form 365-2 See Aircraft Weighing Record.

DD Form 365-3 See Basic Weight and Balance Record.

DD Form 365-4 See Weight and Balance Clearance Form.

Drainable Fuel Drainable fuel is that portion of the fuel that can be drained out of an aircraft through drain points after defueling in accordance with appropriate instructions.

E

Empty Weight The empty weight of an aircraft is the maximum gross weight less the following:
a. All fuel and oil except system fuel and oil. System fuel and oil is that amount required to fill both system and tanks, where applicable, up to outlets to the engine. When oil is used for propeller feathering, such oil is included as system oil.
b. Crew and crew baggage.
c. Drainable anti-detonant injection, augmentation and deicing fluids.
d. Passengers and cargo (revenue and non-revenue).
e. Removable passenger service equipment, food, magazines, etc.
f. Emergency equipment (over-water, tropical, frigid).
g. Other equipment, variable for flight.
h. Flight spares (spark plugs, wheel, cylinder, etc.)
This term is used for design purposes and should not be confused with weight empty

Expendable Includes items planned to be dispensed during flight such as usable fuel, paratroops, airdrop, ammunition, expendable stores, flare /chaff or any item dispensed during flight.

Expendable Store An aircraft store normally separated from the aircraft in flight such as a missile, rocket, bomb, nuclear weapon, mine, torpedo, pyrotechnic device, sonobuoy, signal underwater sound device, or other similar items.

F

Flight Gross Weight — Flight gross weight is the weight of the aircraft, its contents, and external items during flight. It is also known as flight weight and in-flight weight.

Floor Loading — Floor loading is the weight of a load divided by the area of the floor upon which the weight is placed. Specific aircraft Operator's Manuals, Cargo Loading Manuals, and/or Charts E will usually specify floor loading limits and total load capacity for various compartments of the aircraft.

Form B — See Aircraft Weighing Record

Form F — See Weight and Balance Clearance Form

Forward Center of Gravity Limit — The forward center of gravity limit is the most forward permissible aircraft center of gravity location for a specific weight and configuration. Center of Gravity limits may be expressed in inches (arm), %MAC, or index and are normally listed in the aircraft Operator's Manual.

Fulcrum — A fulcrum is a pivot or support about which items can be balanced or rotated.

Fuselage Station — Fuselage stations are reference locations measured in the longitudinal direction (forward or aft) from a reference datum which is usually well forward of the aircraft.

G

Gross Weight — Gross weight is the total weight of the aircraft, including its contents and externally mounted items, at any time. The gross weight is continually changing throughout flight and/or ground operations.

Gross Weight Arm — Gross weight arm is the distance from the reference datum to the cg of an aircraft in its gross weight condition. The relationship between the gross weight, gross weight arm, and gross weight moment is as follow: gross weight arm (in) = gross weight moments (in lb) gross weight (lb)

Gross Weight Moment — Gross weight moment is the sum of moments of all items making up the aircraft in the gross weight condition. The gross weight moment is the product of gross weight times the gross weight arm.

Group A (A-Kit) — Group A items are provisions for avionics line replaceable units (LRUs or WRAs). Group A items include wires, wire bundles, cables, RF transmission lines, connecting devices, mounting hardware, cooling plumbing and ducting, and items required for the installation of antennas, LRUs, WRAs control display, etc.

Group B (B-Kit) — Group B items are those "black boxes" such as antennas, LRUs, WRAs, control and displays that are easily replaceable items in the electronic system.

H

Hoisting Weight — The hoisting weight is the highest weight required for hoisting at the designed hoisting points considering combinations of hoisting points. The weight is usually defined as the maximum ground weight minus the crew and passengers, and is used to design the hoisting point loads and related structures. This is to allow for a more timely removal of an aircraft disabled on a runway.

I

Index — See Load Adjuster Index

J

Jig Points — A jig point is a hole, fitting, or other fixture, which is the same known distance from each reference datum for all aircraft of the same model designation.

L

Landing Gross Weight — Landing gross weight is the weight of the aircraft, its contents and external items when the aircraft lands. It is also known as landing weight.

Leading Edge Of The Mean Aerodynamic Chord (LEMAC) — The LEMAC is the distance from the longitudinal reference datum to the leading edge of the MAC.

Leveling Lugs — Leveling lugs are fixtures attached to the aircraft to support a spirit level or inclinometer when leveling the aircraft.

Leveling Plate — A leveling plate is a target, with index markings, which is attached to the aircraft and is used with a plumb bob when leveling the aircraft.

Limiting Wing Fuel Allowable Gross Weight — Limiting wing fuel allowable gross weight is the weight above which any additional load must be fuel carried in the wing.

Load Adjuster — A load adjuster is a slide rule type mechanical balance computer.

Load Adjuster Index — A load adjuster index is a number that represents moment on the aircraft load adjuster and, in conjunction with aircraft weight or index formula, permits center of gravity calculations.

Load Item — Any item that has a size and weight value that is added to an airframe/platform and is not considered part of basic weight. Load items could be crew, crew baggage, fixed equipment, emergency equipment, internal cargo items, external cargo items, sling loads, external stores, expendable items, non–expendable items, jettisonable items, fuel or temporary ballast. These items are listed in the Chart E.

Loading Control — Loading Control, as used in weight and balance, is the use of weight and balance forms and loading data to ensure that the aircraft weight, center of gravity, and any other loading limits are not exceeded during flight or ground operations.

Loading Data — Chart E. — Loading Data contains instructions for aircraft actual weighing, aircraft diagrams, loading limits, general instructions affecting aircraft loading, and the weight, arm and moment/index information necessary to perform loading control.

Loading Limits — Loading Limits are restrictions, such as permissible center of gravity range, floor loading, compartment capacity, and gross weight, beyond which aircraft loading is not permitted.

M

Maximum Gross Weight — See Allowable Gross Weight.

Maximum Zero Fuel Weight (MZFW) — Maximum Zero Fuel Weight is the maximum permissible weight of the loaded aircraft before any usable fuel is added.

Mean Aerodynamic Chord (MAC) — MAC is the chord that passes through the centroid of an aerodynamic surface (wing, tail, etc.). The MAC of the wing is a primary reference for longitudinal cg locations. Center of gravity limits for fixed wing aircraft (not rotorcraft) are usually expressed in terms of % MAC (% of distance from the leading edge to the trailing edge of the MAC). The % MAC can be computed from the following equation: cg (% MAC) = (cg (Arm) – LEMAC) x 100 MAC

Moment — Moment is a measure of the rotational tendency of a weight about a point. The moment of an item is the weight of the item multiplied by its arm.

Moment Arm — See ARM.

O

Operating Weight — Operating weight includes the basic weight plus aircrew, the aircrew's baggage, steward's equipment and emergency and other equipment that may be required. Operating weight does not include the weight of fuel, ammunition, bombs, cargo, or external auxiliary fuel tanks if such tanks are to be disposed of during flight.

P

Payload — Payload is any item that is being transported and is directly related to the purpose of the flight as opposed to items that are necessary for the flight operation. Payload can include, but is not limited to, passengers, cargo, passenger baggage, ammo, internal and external stores, and fuel that are to be delivered to another aircraft or site. Payload may or may not be expended in flight.

Percent MAC (% MAC) — Percent MAC expresses a location along the aircraft longitudinal axis as a percentage of the mean aerodynamic chord of the aircraft.

Permanent Ballast — Permanent ballast is ballast that is required to be in the aircraft at all times.

Permissible Gross Weight — See Allowable Gross Weight.

R

Record of Weight and Balance Personnel — The record of Weight and Balance Personnel, DD Form 365, is the form used to provide a permanent continuous record of weight and balance personnel responsible for maintaining the aircraft weight and balance handbook.

Reference Datum — Reference datum is an imaginary plane perpendicular to the longitudinal axis of the aircraft and is usually located at or near the nose of the aircraft to eliminate arms with a minus value. If a negative arm is encountered, the corresponding moment will also be negative. Aircraft have three zero reference datum from which aircraft locations are measured in the longitudinal (using fuselage station), lateral (using Buttlines), and vertical (using waterlines) directions.

Representative Aircraft — A representative aircraft is one chosen as being typical of a number of aircraft of the same Model/Design with similar structure, systems, and equipment configurations.

S

Scale Correction Factor — A scale correction factor is used to modify weighing scale readings because of inherent inaccuracies of the scale. Such factors may be, but are not limited to: calibration correction factors with the use of mechanical scales, load cell correction factors when the load cell readings do not return to zero after unloading with the use of electronic scales, or gravitation correction factors which depend upon the latitude of the earth and elevation above sea level. Refer to the scale's applicable manual for the appropriate factors.

Service Weight Pick-Up — Service weight pickup is the weight, accounted for and unaccounted for, which is picked up by an aircraft during its service life. Service weight pickup is due to repairs and/or modifications (known pickup). Known pickup covers the actual parts installed during repair, overhaul, and modification. These parts should be weighed or, if weighing is impractical, the weight must be calculated. Unknown pickup results from changes in temperature and humidity, moisture absorption by sound proofing, accumulation of dirt, grease, etc., and can only be determined by periodic and accurate weighing of the aircraft.

Simplified Moment — Simplified moment is a moment divided by an established constant such as 100, 1000, 10,000, or 100,000.

T

Takeoff Gross Weight — Takeoff gross weight includes the operating weight plus fuel, cargo, ammunition, bombs, auxiliary fuel tanks, etc at the time the aircraft becomes airborne.

Tare — Tare is the weight of equipment necessary for weighing the aircraft, such as chocks, blocks, slings, and jacks, which is included in the scale reading but is not part of the aircraft weight. It can also include a Scale Correction Factor.

Temporary Ballast — Temporary ballast is used to replace missing items, such as crew members, armament, and equipment, in order to maintain the aircraft center of gravity within limits and/or to simulate a specific aircraft configuration.

Total Aircraft Weight — The sum of operating weight, weight of takeoff fuel, and weight of water injection fluid, if applicable.

Trapped Fuel — Trapped fuel is the fuel that remains in an aircraft after utilizing applicable technical manuals to defuel the aircraft and drain individual tanks.

U

Unaccountable Weight/Moment — Unaccountable weight/moment is any change in basic weight/moment, which is not reflected by an entry in the Chart C.

Unusable Fuel — Unusable fuel is the fuel remaining in the aircraft fuel tanks after engine fuel starvation when the aircraft is in the specified flight attitude.

Useful Load — Useful load is the difference between empty weight and gross weight and includes fuel, oil, crew, passengers, cargo, and other material carried.

W

Waterline — Waterline are locations in the vertical (up and down) direction measured from a reference datum which is usually well below the aircraft.

Weighing Reaction Points — Weighing reaction points are those points upon which the aircraft weight is supported during weighing.

Weight and Balance Authority — Person who has the responsibility to ensure the weight and balance work is complete and correct.

Weight and Balance Clearance Form — The Weight and Balance Clearance Form, DD Form 365-4, is referred to as Form F. Tactical and Transport Forms F Record weight, moment or index, and center of gravity calculations to ensure the aircraft remains within its weight and balance limitations.

Weight and Balance Handbook — An aircraft weight and balance handbook is a continuous and permanent record of weight and balance of a particular aircraft. It contains the Record of Weight and Balance Personnel (DD Form 365), the Chart A (DD Form 365-1), completed Forms B (DD Form 365-2), Chart C (DD Form 365¬3), Chart E, and completed Forms F (DD Form 365¬4) for the aircraft; and blank copies of the various DD 365 series forms.

Weight and Balance Technician/Personnel — Qualified person assigned to weight and balance work.

Weight Empty

Weight empty is an engineering term, which is defined for aircraft design and does not affect operational activities. It is the weight of the aircraft, complete by model design definitions, dry, clean, and empty except for fluids in closed systems such as a hydraulic system. This term should not be confused with empty weight.

Z

Zero Fuel Weight

Zero fuel weight is the weight of the loaded aircraft without any usable fuel. See also Maximum Zero Fuel Weight.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-31, AVUM and AVIM requirements for All Fixed and Rotary Wing Aircraft.

☆U.S. GOVERNMENT PRINTING OFFICE: 1994-342-421/81480

These are the instructions for sending an electronic 2028

The following format must be used if submitting an electronic 2028. The subject line must be exactly the same and all fields must be included; however only the following fields are mandatory: 1, 3, 4, 5, 6, 7, 8, 9, 10, 13, 15, 16, 17, and 27.

From: "Whomever" <whomever@wherever.army.mil>
To: 2028@redstone.army.mil

Subject: DA Form 2028

1. ***From:*** Joe Smith
2. *Unit:* home
3. ***Address:*** 4300 Park
4. ***City:*** Hometown
5. ***St:*** MO
6. ***Zip:*** 77777
7. ***Date Sent:*** 19−OCT−93
8. ***Pub no:*** 55−2840−229−23
9. ***Pub Title:*** TM
10. ***Publication Date:*** 04−JUL−85
11. *Change Number:* 7
12. *Submitter Rank:* MSG
13. ***Submitter FName:*** Joe
14. *Submitter MName:* T
15. ***Submitter LName:*** Smith
16. ***Submitter Phone:*** 123−123−1234
17. ***Problem:*** **1**
18. *Page:* 2
19. *Paragraph:* 3
20. *Line:* 4
21. *NSN:* 5
22. *Reference:* 6
23. *Figure:* 7
24. *Table:* 8
25. *Item:* 9
26. *Total:* 123
27. ***Text:***

This is the text for the problem below line 27.

RECOMMENDED CHANGES TO PUBLICATIONS AND BLANK FORMS For use of this form, see AR 25–30; the proponent agency is ODISC4.	Use Part II (*reverse)* for Repair Parts and Special Tool Lists (RPSTL) and Supply Catalogs/ Supply Manuals (SC/SM)	DATE 8/30/02
TO: (*Forward to proponent of publication or form)(Include ZIP Code)* Commander, U.S. Army Aviation and Missile Command ATTN: AMSAM–MMC–MA–NP Redstone Arsenal, AL. 35898	FROM: (*Activity and location)(Include ZIP Code)* MSG, Jane Q. Doe 1234 Any Street Nowhere Town, AL 34565	

PART 1 – ALL PUBLICATIONS (EXCEPT RPSTL AND SC/SM) AND BLANK FORMS

PUBLICATION/FORM NUMBER	DATE	TITLE
TM 9–1005–433–24	16 Sep 2002	Organizational, Direct Support, And General Support Maintenance Manual for Machine Gun, .50 Caliber M3P and M3P Machine Gun Electrical Test Set Used On Avenger Air Defense Weapon System

ITEM NO.	PAGE NO.	PARA–GRAPH	LINE NO. *	FIGURE NO.	TABLE NO.	RECOMMENDED CHANGES AND REASON
1	WP0005 PG 3		2			Test or Corrective Action column should identify a different WP number.

EXAMPLE

** Reference to line numbers within the paragraph or subparagraph.*

TYPED NAME, GRADE OR TITLE	TELEPHONE EXCHANGE/ AUTOVON, PLUS EXTENSION	SIGNATURE
MSG, Jane Q. Doe, SFC	788–1234	

TO: (*Forward direct to addressee listed in publication)*	**FROM:** (*Activity and location) (Include ZIP Code)*	**DATE**
Commander, U.S. Army Aviation and Missile Command ATTN: AMSAM–MMC–MA–NP Redstone Arsenal, AL. 35898	MSG, Jane Q. Doe 1234 Any Street Nowhere Town, AL 34565	8/30/02

PART II – REPAIR PARTS AND SPECIAL TOOL LISTS AND SUPPLY CATALOGS/SUPPLY MANUALS

PUBLICATION NUMBER	DATE	TITLE

PAGE NO.	COLM NO.	LINE NO.	NATIONAL STOCK NUMBER	REFERENCE NO.	FIGURE NO.	ITEM NO.	TOTAL NO. OF MAJOR ITEMS SUPPORTED	RECOMMENDED ACTION

PART III – REMARKS (*Any general remarks or recommendations, or suggestions for improvement of publications and blank forms. Additional blank sheets may be used if more space is needed.)*

EXAMPLE

TYPED NAME, GRADE OR TITLE	TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION	SIGNATURE
MSG, Jane Q. Doe, SFC	788–1234	

RECOMMENDED CHANGES TO PUBLICATIONS AND BLANK FORMS For use of this form, see AR 25–30; the proponent agency is ODISC4.	Use Part II (*reverse)* for Repair Parts and Special Tool Lists (RPSTL) and Supply Catalogs/ Supply Manuals (SC/SM)	DATE
TO: (*Forward to proponent of publication or form)(Include ZIP Code)* Commander, U.S. Army Aviation and Missile Command ATTN: AMSAM-MMC-MA-NP Redstone Arsenal, AL 35898	FROM: (*Activity and location)(Include ZIP Code)*	

PART 1 – ALL PUBLICATIONS (EXCEPT RPSTL AND SC/SM) AND BLANK FORMS

PUBLICATION/FORM NUMBER	DATE	TITLE

ITEM NO.	PAGE NO.	PARA–GRAPH	LINE NO. *	FIGURE NO.	TABLE NO.	RECOMMENDED CHANGES AND REASON

** Reference to line numbers within the paragraph or subparagraph.*

TYPED NAME, GRADE OR TITLE	TELEPHONE EXCHANGE/ AUTOVON, PLUS EXTENSION	SIGNATURE

TO: (*Forward direct to addressee listed in publication)* Commander, U.S. Army Aviation and Missile Command ATTN: AMSAM-MMC-MA-NP Redstone Arsenal, AL 35898	**FROM:** (*Activity and location) (Include ZIP Code)*	**DATE**

PART II – REPAIR PARTS AND SPECIAL TOOL LISTS AND SUPPLY CATALOGS/SUPPLY MANUALS

PUBLICATION NUMBER	DATE	TITLE

PAGE NO.	COLM NO.	LINE NO.	NATIONAL STOCK NUMBER	REFERENCE NO.	FIGURE NO.	ITEM NO.	TOTAL NO. OF MAJOR ITEMS SUPPORTED	RECOMMENDED ACTION

PART III – REMARKS (*Any general remarks or recommendations, or suggestions for improvement of publications and blank forms. Additional blank sheets may be used if more space is needed.)*

TYPED NAME, GRADE OR TITLE	TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION	SIGNATURE

The Metric System and Equivalents

Linear Measure

1 centimeter = 10 millimeters = .39 inch
1 decimeter = 10 centimeters = 3.94 inches
1 meter = 10 decimeters = 39.37 inches
1 dekameter = 10 meters = 32.8 feet
1 hectometer = 10 dekameters = 328.08 feet
1 kilometer = 10 hectometers = 3,280.8 feet

Weights

1 centigram = 10 milligrams = .15 grain
1 decigram = 10 centigrams = 1.54 grains
1 gram = 10 decigram = .035 ounce
1 decagram = 10 grams = .35 ounce
1 hectogram = 10 decagrams = 3.52 ounces
1 kilogram = 10 hectograms = 2.2 pounds
1 quintal = 100 kilograms = 220.46 pounds
1 metric ton = 10 quintals = 1.1 short tons

Liquid Measure

1 centiliter = 10 milliters = .34 fl. ounce
1 deciliter = 10 centiliters = 3.38 fl. ounces
1 liter = 10 deciliters = 33.81 fl. ounces
1 dekaliter = 10 liters = 2.64 gallons
1 hectoliter = 10 dekaliters = 26.42 gallons
1 kiloliter = 10 hectoliters = 264.18 gallons

Square Measure

1 sq. centimeter = 100 sq. millimeters = .155 sq. inch
1 sq. decimeter = 100 sq. centimeters = 15.5 sq. inches
1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet
1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet
1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres
1 sq. kilometer = 100 sq. hectometers = .386 sq. mile

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. inch
1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches
1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

To change	*To*	*Multiply by*	*To change*	*To*	*Multiply by*
inches	centimeters	2.540	ounce-inches	Newton-meters	.007062
feet	meters	.305	centimeters	inches	.394
yards	meters	.914	meters	feet	3.280
miles	kilometers	1.609	meters	yards	1.094
square inches	square centimeters	6.451	kilometers	miles	.621
square feet	square meters	.093	square centimeters	square inches	.155
square yards	square meters	.836	square meters	square feet	10.764
square miles	square kilometers	2.590	square meters	square yards	1.196
acres	square hectometers	.405	square kilometers	square miles	.386
cubic feet	cubic meters	.028	square hectometers	acres	2.471
cubic yards	cubic meters	.765	cubic meters	cubic feet	35.315
fluid ounces	milliliters	29,573	cubic meters	cubic yards	1.308
pints	liters	.473	milliliters	fluid ounces	.034
quarts	liters	.946	liters	pints	2.113
gallons	liters	3.785	liters	quarts	1.057
ounces	grams	28.349	liters	gallons	.264
pounds	kilograms	.454	grams	ounces	.035
short tons	metric tons	.907	kilograms	pounds	2.205
pound-feet	Newton-meters	1.356	metric tons	short tons	1.102
pound-inches	Newton-meters	.11296			

Temperature (Exact)

°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

PIN: 060247-000

This fine document...

Was brought to you by me:



Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=http://www.liberatedmanuals.com/>Free Military and Government Manuals</A>

- Sincerely
  Igor Chudov
  http://igor.chudov.com/
- Chicago Machinery Movers